
Slot Diffuser – Type BSD-HI-16/28




Fully manufactured from Aluminium Extrusion, our high induction Slot Diffuser has been designed for either ceiling or wall mounting.
The individual barrel arrangement creates micro jets of air to provide a high induction air flow, this rapidly reduces the supply air velocity and temperature differential, providing high comfort criteria.

Barrel Variations

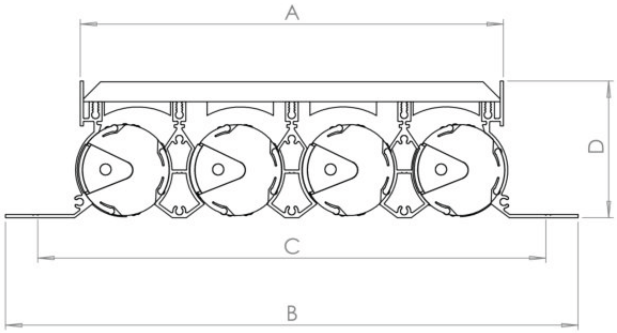


HI-16	A	B	C	D
1 Slot	40.5	74.5	50.5	39
2 Slot	72	106	82	39
3 Slot	104	138	114	39
4 Slot	136	170	146	39

HI-28	A	B	C	D
1 Slot	47.6	114.6	57.6	59
2 Slot	86	153	96	59
3 Slot	135	202	145	59
4 Slot	184	251	194	59

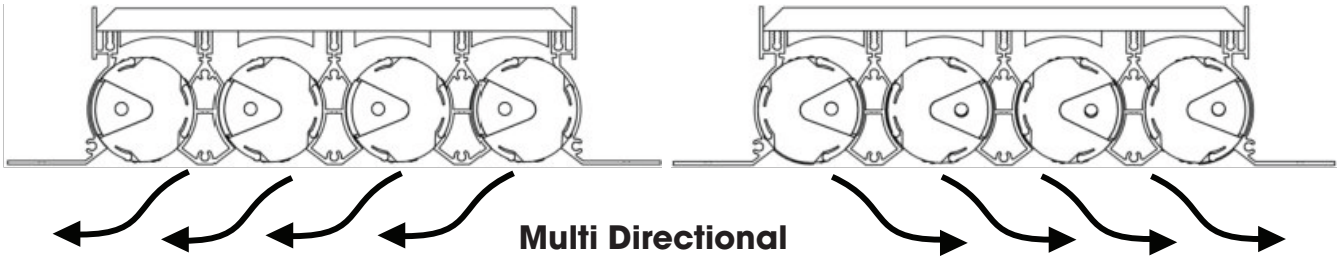


Multiple Variations

Plaster In Frame - BSD-HI-P

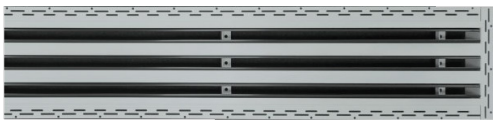

Clip In Type - BSD-HI-M

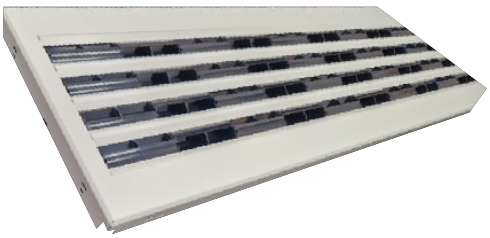

Mitred Corner



Wide Flange - BSD-HI-W



Plank Slot Diffuser - BSD-HI-PL




BSD-HI-16

SIZE											
1 SLOT	L/s	20	30	40	50	60	70				
	Throw m 0.25 - 0.5 m/s	1.6 - 0.8	2.4 - 1.2	3.2 - 1.6	4.0 - 2.0	4.8 - 2.4	5.6 - 2.8				
	Pa	3	7	12	19	28	38				
	NR	10	21	29	36	41	45				
2 SLOT	L/s	20	30	40	50	60	70	80	90	100	120
	Throw m 0.25 - 0.5 m/s	1.2 - 0.6	1.7 - 0.9	2.3 - 1.2	2.9 - 1.4	3.5 - 1.7	4.1 - 2.0	4.6 - 2.3	5.2 - 2.6	5.8 - 2.9	6.9 - 3.5
	Pa	1	3	6	9	13	18	23	29	36	52
	NR		7	15	22	27	31	35	38	41	46
3 SLOT	L/s	40	50	60	70	80	90	100	120	140	160
	Throw m 0.25 - 0.5 m/s	1.8 - 0.9	2.3 - 1.1	2.7 - 1.4	3.2 - 1.6	3.6 - 1.8	4.1 - 2.0	4.5 - 2.3	5.4 - 2.7	6.3 - 3.2	7.2 - 3.6
	Pa	4	6	8	11	14	18	22	32	43	56
	NR	7	14	19	23	27	30	33	38	43	46
4 SLOT	L/s	60	70	80	90	100	120	140	160	180	
	Throw m 0.25 - 0.5 m/s	2.2 - 1.1	2.6 - 1.3	3 - 1.5	3.4 - 1.7	3.7 - 1.9	4.5 - 2.2	5.2 - 2.6	6.0 - 3.0	6.7 - 3.4	
	Pa	6	8	11	14	17	24	33	43	55	
	NR	12	16	20	23	26	31	36	39	43	

BSD-HI-28


SIZE											
1 SLOT	L/s	20	30	40	50	60	70				
	Throw m 0.25 - 0.5 m/s	1.3 - 0.7	2.0 - 1.0	2.6 - 1.3	3.3 - 1.6	3.9 - 2.0	4.6 - 2.3				
	Pa	2	6	10	15	22	30				
	NR	1	12	20	27	32	36				
2 SLOT	L/s	20	30	40	50	60	70	80	90	100	120
	Throw m 0.25 - 0.5 m/s	0.9 - 0.5	1.4 - 0.7	1.8 - 0.9	2.3 - 1.2	2.8 - 1.4	3.2 - 1.6	1.7 - 1.8	4.2 - 2.1	4.6 - 2.3	5.5 - 2.8
	Pa	1	2	4	7	10	13	17	22	27	39
	NR	-	-	8	15	20	24	28	31	34	39
3 SLOT	L/s	40	50	60	70	80	90	100	120	140	160
	Throw m 0.25 - 0.5 m/s	1.4 - 0.7	1.8 - 0.9	2.1 - 1.1	2.5 - 1.3	2.9 - 1.4	3.2 - 1.6	3.6 - 1.8	4.3 - 2.1	5.0 - 2.5	5.7 - 2.9
	Pa	1	-	3	4	6	7	9	13	18	23
	NR	-	6	11	15	19	22	12	30	35	38
4 SLOT	L/s	60	70	80	90	100	120	140	160	180	200
	Throw m 0.25 - 0.5 m/s	2.0 - 1.0	2.3 - 1.2	2.7 - 1.3	3.0 - 1.5	3.3 - 1.7	4.0 - 2.0	4.7 - 2.3	5.3 - 2.7	6.0 - 3.0	6.7 - 3.3
	Pa	-	2	3	4	5	6	9	13	17	21
	NR	-	2	6	9	12	17	22	25	29	32
	L/s	220	240	250							
	Throw m 0.25 - 0.5 m/s	7.3 - 3.7	8.0 - 4.0	8.3 - 4.2							
	Pa	31	37	41							
	NR	34	37	38							

Plenum Box Details

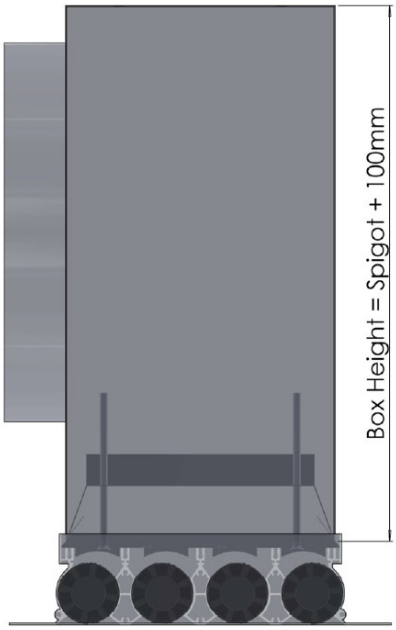





Fixing Detail

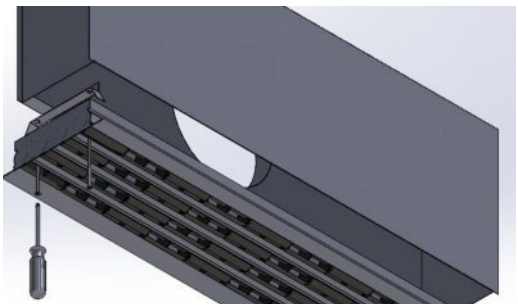

Insert a screw through the barrel and into the neck bracket attached to the high induction slot diffuser, screw through the plenum box bracket and repeat this for the remaining plenum box brackets.

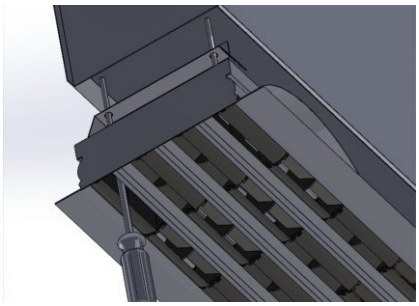

Once the fixing brackets are connected to the screws the high induction slot diffuser can be pushed up to the plenum box, the plenum box brackets will spring out after passing through the hemmed edges and will then secure the high induction slot in the box.

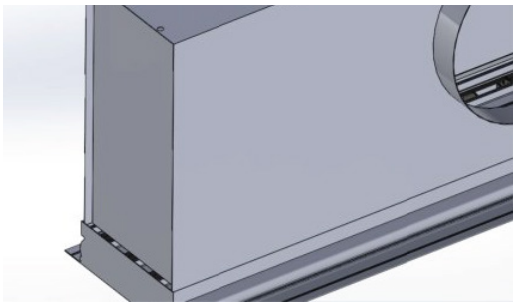

Once the brackets are secure inside the box, tighten the screws until the box and high induction slot diffuser are fully joined together.
The plenum box can be suspended via drop rods or gripple wire through the holes at the top of the box

Please contact our Sales Office on for selection guidance on the above:

3-4 Torridge Close,
Telford Way Industrial Estate,
Kettering, Northants, NN16 8PY

P 01536 519 922

E sales@polyaire.co.uk