

AVALON presents the Offset Glazing System, a variant of our standard Eagle System.

- This system maintains the core features of the Eagle System while introducing an offset glazing bucket, resulting in a sleek, flush wall appearance. Custom offset distances are also available.
- Profiles are available in standard 1-1/2" or 2"
- No sill starter/ blocking needed
- 4-1/2" x 4-1/2" Hinges
- ANSI Strike
- No Extended Lip Strike Required
- 1" Wide Door Stop
- No Additional Bracket needed for Parallel Arm Closer
- Heavy-duty All Aluminum Hinge Backer
- Mitre Corners Available
- Double-Egress Frame



Clear  
Anodized



Standard  
Black



Standard  
White



Standard  
Bronze



Standard  
Grey



Champagne

## PREMIUM HARDWARE

- Heavy Weight Hinge preps
- Electric Hinge preps
- 5" x 5" Hinge preps
- Concealed Closers
- EPT – Concealed & Hinge types
- Electric Strikes - All types
- SOSS Hinges - Concealed Hinges
- Concealed Overhead Stops
- Flush Bolts
- Backers Included & Installed

System can Accommodate up to 1-1/8" Insulated Glass Units



No Field Notching of Trim Required

### Rough Opening for 1-1/2" or 2" profile:

Opening Size + 3/4" each side

Example: 3070 Frame

$3/4" + 36" \text{ width} + 3/4" = 37-1/2" \text{ rough opening}$

Example: 3070 Frame with 1'-0" Sidelite


$3/4" + 36" \text{ width} + 1-1/2" \text{ profile} + 1'-0" \text{ sidelite} + 3/4" = 4'-3"$

### All Throats Feature:


Flush Glazing 3-1/2" to 16-1/2" walls in 1/8" increments




**AVALON**  
**INTERNATIONAL**  
**ALUMINUM**

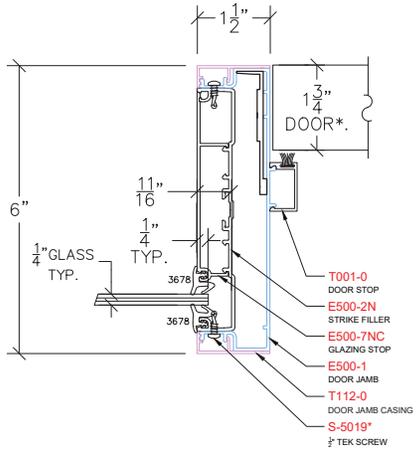


O150 - DOOR JAMB SIDELIGHT

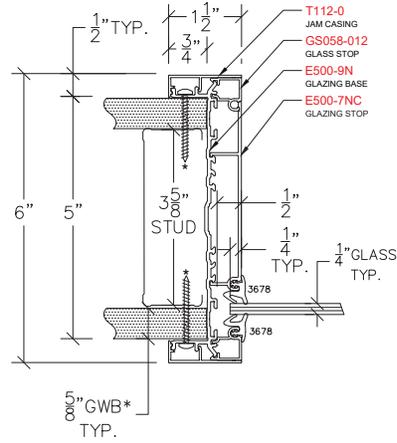

O300 - GLAZING JAMB

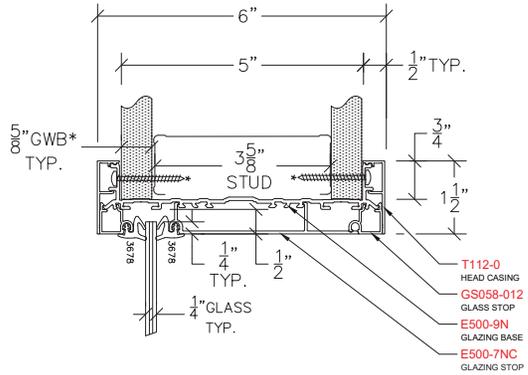

O400 - GLAZING HEAD

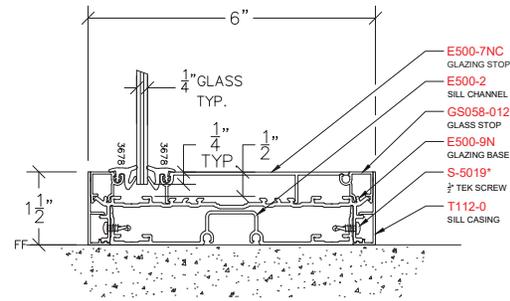

O420 - GLAZING SILL

