


Encapsulated within double glazing, these blinds offer benefits such as low maintenance, space-saving design, and enhanced aesthetics.

- Profiles are available in standard 1-1/2" or 2"
- No sill starter/ blocking needed
- 4-1/2" x 4-1/2" Hinges
- ANSI Strike
- No Extended Lip Strike Required
- 1" Wide Door Stop
- No Additional Bracket needed for Parallel Arm Closer
- Heavy-duty All Aluminum Hinge Backer
- Mitre Corners Available
- Double-Egress Frame



Clear Anodized



Standard Black



Standard White



Standard Bronze



Standard Grey



Champagne

PREMIUM HARDWARE

- Heavy Weight Hinge preps
- Electric Hinge preps
- 5" x 5" Hinge preps
- Concealed Closers
- EPT – Concealed & Hinge types
- Electric Strikes - All types
- SOSS Hinges - Concealed Hinges
- Concealed Overhead Stops
- Flush Bolts
- Backers Included & Installed

System can Accommodate up to 1-1/8" Insulated Glass Units



No Field Notching of Trim Required

Rough Opening for 1-1/2" or 2" profile:

Opening Size + 3/4" each side

Example: 3070 Frame

$3/4" + 36" \text{ width} + 3/4" = 37-1/2" \text{ rough opening}$

Example: 3070 Frame with 1'-0" Sidelite


$3/4" + 36" \text{ width} + 1-1/2" \text{ profile} + 1'-0" \text{ sidelite} + 3/4" = 4'-3"$

All Throats Feature:


Flush Glazing 3-1/2" to 16-1/2" walls in 1/8" increments




AVALON
INTERNATIONAL
ALUMINUM

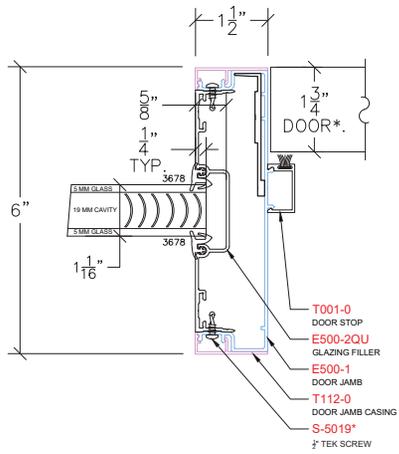


E150 - DOOR JAMB SIDELIGHT

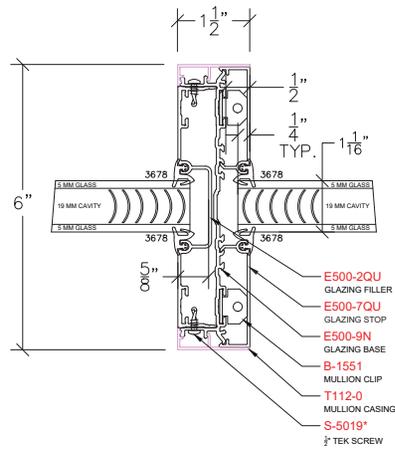


E307 - GLAZING INTERMEDIATE VERTICAL

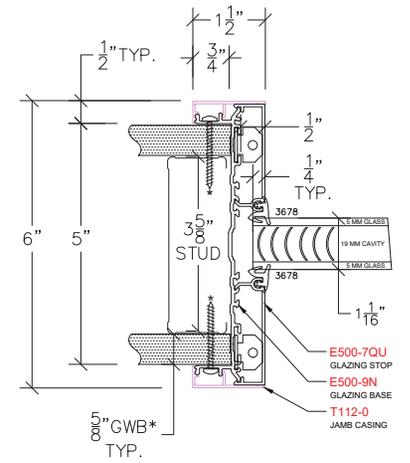

E309 - GLAZING JAMB

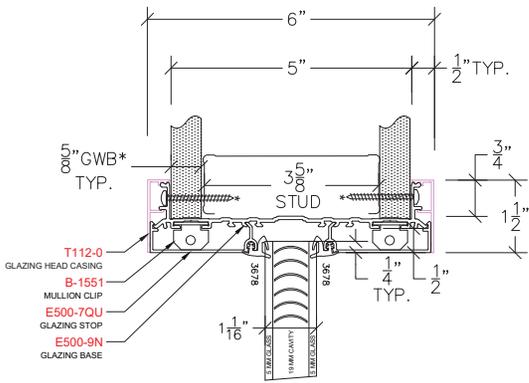

E409 - GLAZING HEAD

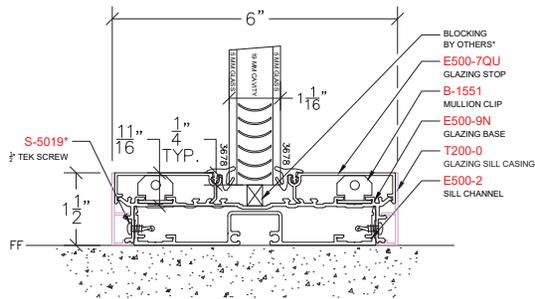

E420 - GLAZING SILL

