

- STC-rated windows are a versatile solution for an array of commercial settings, ranging from medical offices to recording studios.
- Profiles are available in standard 1-1/2" or 2"
- No sill starter/ blocking needed
- 4-1/2" x 4-1/2" Hinges
- ANSI Strike
- No Extended Lip Strike Required
- 1" Wide Door Stop
- No Additional Bracket needed for Parallel Arm Closer
- Heavy-duty All Aluminum Hinge Backer
- Mitre Corners Available
- Double-Egress Frame



Clear Anodized



Standard Black



Standard White



Standard Bronze



Standard Grey



Champagne

PREMIUM HARDWARE

- Heavy Weight Hinge preps
- Electric Hinge preps
- 5" x 5" Hinge preps
- Concealed Closers
- EPT – Concealed & Hinge types
- Electric Strikes - All types
- SOSS Hinges - Concealed Hinges
- Concealed Overhead Stops
- Flush Bolts
- Backers Included & Installed

Aluminum Frames With Glazing

Independently Tested STC of 53



No Field Notching of Trim Required

Rough Opening for 1-1/2" or 2" profile:

Opening Size + 3/4" each side

Example: 3070 Frame


$3/4" + 36" \text{ width} + 3/4" = 37\text{-}1/2"$ rough opening

Example: 3070 Frame with 1'-0" Sidelite


$3/4" + 36" \text{ width} + 1\text{-}1/2" \text{ profile} + 1\text{'-}0" \text{ sidelite} + 3/4" = 4\text{'-}3"$




AVALON
INTERNATIONAL
ALUMINUM

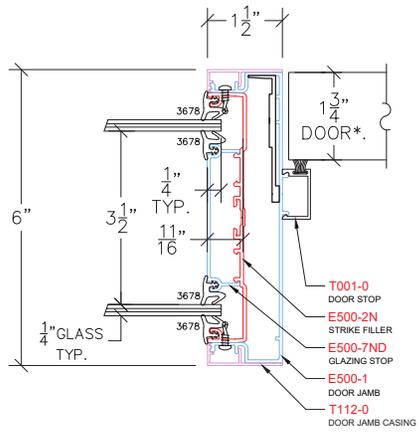


T150 - DOOR JAMB SIDELIGHT

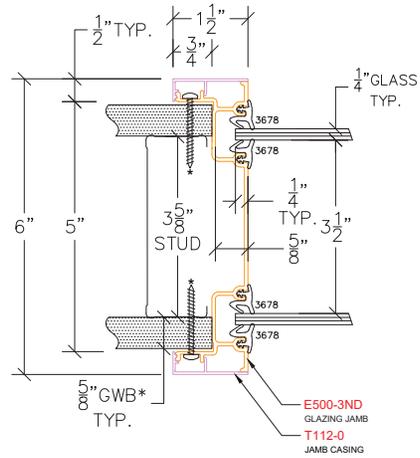


T300 - GLAZING JAMB

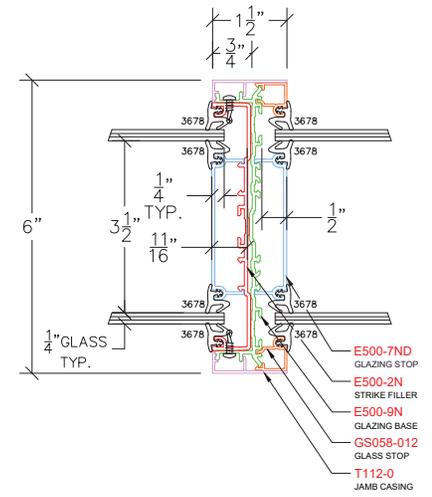

T307 - GLAZING VERTICAL MULLION

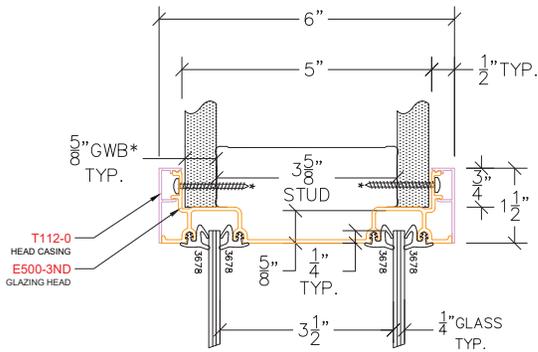

T400 - GLAZING HEAD

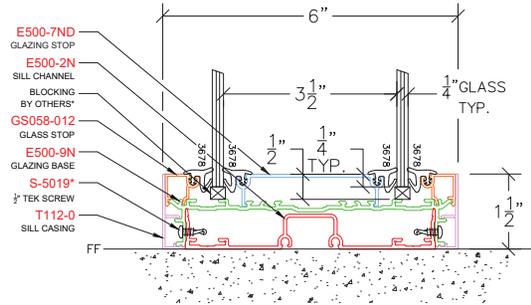

T420 - GLAZING SILL

