


These Blast Resistant Windows can resist a blast wave from an explosion or from extreme weather events.

- The blast-resistant window's style, color, and size can be selected or customized to most any preference.
- It is designed according to the actual size of the building's rough openings to meet the needs of the customer and maximize performance.
- Profiles are available in standard 1-1/2" or 2"
- No sill starter/ blocking needed
- 4-1/2" x 4-1/2" Hinges
- ANSI Strike
- No Extended Lip Strike Required
- 1" Wide Door Stop
- No Additional Bracket needed for Parallel Arm Closer
- Heavy-duty All Aluminum Hinge Backer
- Mitre Corners Available
- Double-Egress Frame



Clear Anodized



Standard Black



Standard White



Standard Bronze



Standard Grey




Champagne

### PREMIUM HARDWARE

- Heavy Weight Hinge preps
- Electric Hinge preps
- 5" x 5" Hinge preps
- Concealed Closers
- EPT – Concealed & Hinge types
- Electric Strikes - All types
- SOSS Hinges - Concealed Hinges
- Concealed Overhead Stops
- Flush Bolts
- Backers Included & Installed

## Aluminum Frames With Glazing

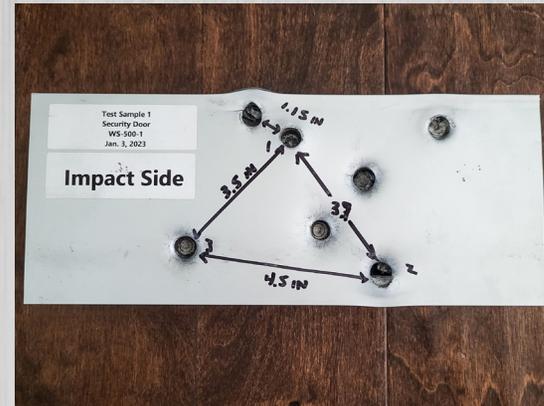

No Field Notching of Trim Required

### Rough Opening for 1-1/2" or 2" profile:

Opening Size + 3/4" each side

Example: 3070 Frame

$3/4" + 36" \text{ width} + 3/4" = 37-1/2"$  rough opening

Example: 3070 Frame with 1'-0" Sidelite


$3/4" + 36" \text{ width} + 1-1/2" \text{ profile} + 1'-0" \text{ sidelite} + 3/4" = 4'-3"$

### All Throats Feature:


Flush Glazing 3-1/2" to 16-1/2" walls in 1/8" increments




**AVALON**  
**INTERNATIONAL**  
**ALUMINUM**

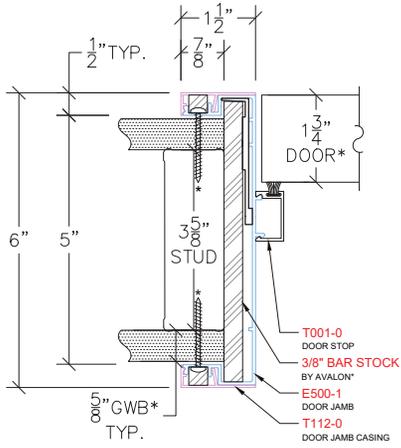


E100 - DOOR JAMB

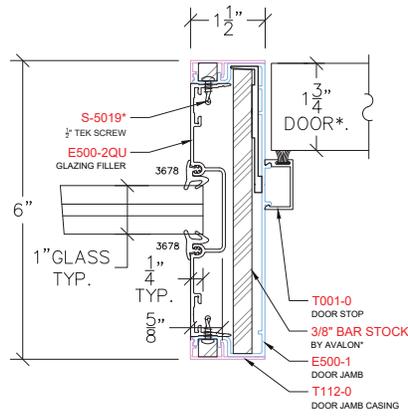


E150 - DOOR JAMB SIDELIGHT

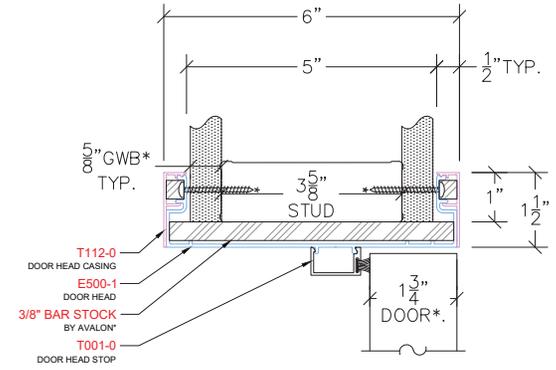


E200 - DOOR HEAD

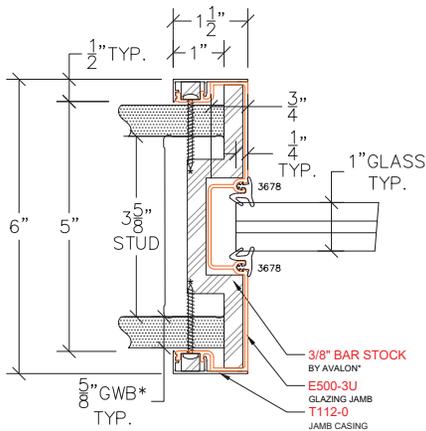


E300 - GLAZING JAMB

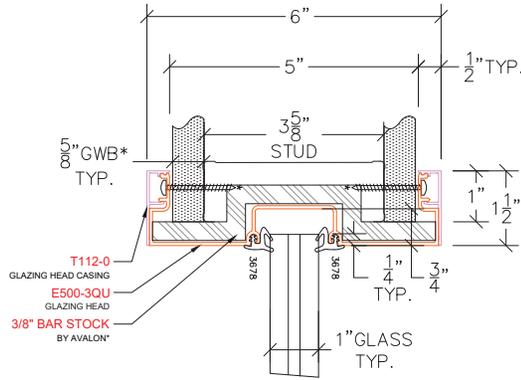

E400 - GLAZING HEAD

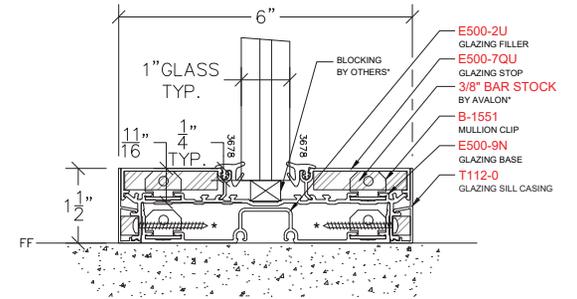

E420 - GLAZING SILL

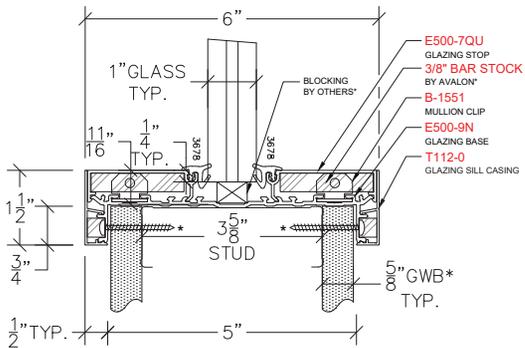

E430 - GLAZING SILL KNEEWALL



**AVALON**  
**INTERNATIONAL**  
**ALUMINUM**