

FEATURES


- › CLUTCH MECHANISM* ON ALL KEYED FUNCTIONS AVAILABLE
- › 3/4" LATCH FOR RATED PAIRED DOOR APPLICATION PER NFPA 80 AVAILABLE
- › C-UL & UL LISTED FOR 3 HOUR FIRE RATING
- › MEETS OR EXCEEDS REQUIREMENTS OF BHMA/ANSI A 156.2 SERIES 4000 GRADE 2
- › THRU-BOLT ANTI-SAG KIT INCLUDED
- › SUPPLIED WITH ASA STRIKE-STANDARD
- › FITS 1-3/8" (35 mm) - 1-3/4" (45 mm) DOOR THICKNESS
- › KEYWAY SCHLAGE "C" IS STANDARD
- › DEFAULT 2-3/4" (70 mm) BACKSET




GRADE
2

ANSI GRADE 2


5 YEAR MECHANICAL WARRANTY

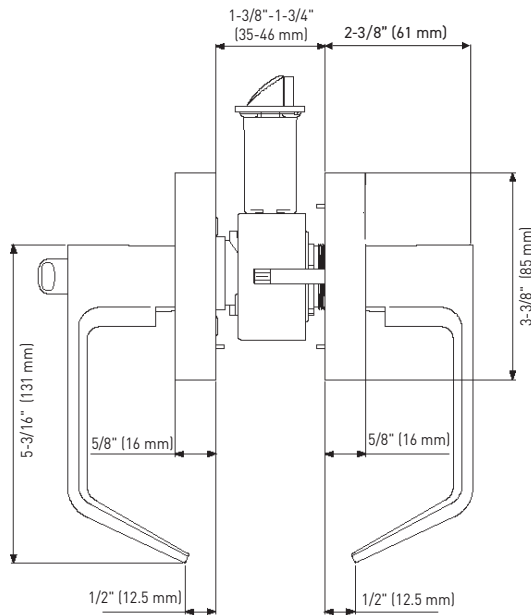

DEAD LATCH

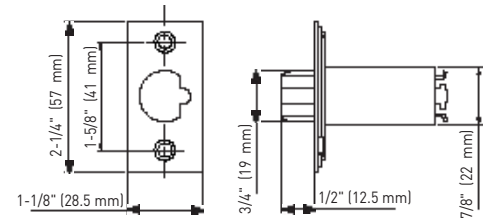

ASA STRIKE

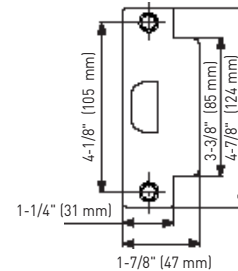

DUKE LEVERSET GRADE 2 HEAVY DUTY CYLINDRICAL

19
MATTE BLACK

26D
SATIN CHROME

CASE
PACK

	19 MATTE BLACK	26D SATIN CHROME	CASE PACK
ENTRY - ENTRANCE/OFFICE LEVERSET (INSIDE PUSH BUTTON)	32-7953BLK	32-7953	12
	*CLUTCH MECHANISM 32-5953BLK	*CLUTCH MECHANISM 32-5953	12
	*3/4" LATCH 32-795334BLK	*3/4" LATCH 32-795334SC	12
PRIVACY - RESTROOM LEVERSET (INSIDE PUSH BUTTON)	32-7940BLK	32-7940	12
	*CLUTCH MECHANISM 32-5940	*CLUTCH MECHANISM 32-5940	12
	*3/4" LATCH 32-794034BLK	*3/4" LATCH 32-794034SC	12
PASSAGE - HALL/CLOSET LEVERSET	32-7910BLK	32-7910	12
		*3/4" LATCH 32-791034SC	12
STOREROOM	32-7980BLK	32-7980	12
	*CLUTCH MECHANISM 32-5980BLK	*CLUTCH MECHANISM 32-5980	12
	*3/4" LATCH 32-798034BLK	*3/4" LATCH 32-798034SC	12
CLASSROOM	32-7970BLK	32-7970	12
	*CLUTCH MECHANISM 32-5970BLK	*CLUTCH MECHANISM 32-5970	12
	*3/4" LATCH 32-797034BLK	*3/4" LATCH 32-797034SC	12
COMMUNICATING PASSAGE - EXIT NON-KEY	32-7925BLK	32-7925	12
		*3/4" LATCH 32-792534SC	12
DUMMY - SINGLE SIDE LEVERSET	32-7993BLK	32-7993	40



CARACTÉRISTIQUES



- > MÉCANISME D'EMBRAYAGE* OFFERT POUR TOUTES LES FONCTIONS À CLÉ
- > LOQUET 3/4 po OFFERT POUR UTILISATION AVEC PORTE DOUBLE CONFORME À LA NORME NFPA80
- > CONFORME AUX NORMES C-UL ET UL POUR UNE RÉSISTANCE AU FEU DE 3 HEURES
- > SATISFAIT OU SURPASSE LES EXIGENCES BHMA/ANSI A156.2 SÉRIE 4000 DE QUALITÉ 2
- > TROUSSE DE BOULONS TRAVERSANTS ANTI-AFFAISSEMENT INCLUSE
- > LIVRÉ AVEC GÂCHE ASA STANDARD
- > CONVIENT À UNE ÉPAISSEUR DE PORTE DE 35 mm (1-3/8 po) - 45 mm (1-3/4 po)
- > ENTRÉE DE CLÉ SCHLAGE "C" STANDARD
- > DISTANCE D'ENTRÉE DE PAR DÉFAUT DE 70 mm (2-3/4 po)




QUALITÉ
2

ANSI DE QUALITÉ 2


GARANTIE DE 5 ANS SUR LES COMPOSANTS MÉCANIQUES

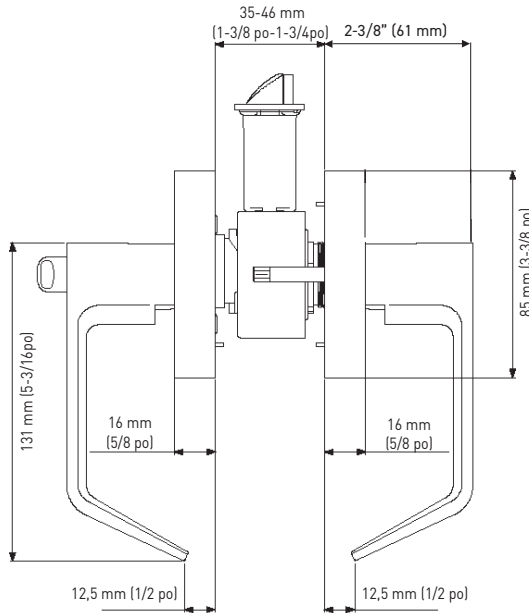

PÈNE DORMANT

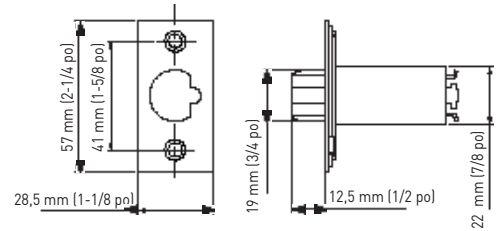

GÂCHE ASA



LEVIER DUKE CYLINDRE ROBUSTE DE QUALITÉ 2

19
NOIR MAT

26D
CHROME SATINÉ

À LA
CAISSE

		19 NOIR MAT	26D CHROME SATINÉ	À LA CAISSE
ENTRÉE - LEVIER D'ENTRÉE/BUREAU (BOUTON-POUSSOIR INTÉRIEUR)		32-7953BLK	32-7953	12
	*MÉCANISME D'EMBRAYAGE	32-5953BLK	*MÉCANISME D'EMBRAYAGE 32-5953	12
	*LOQUET 3/4 po	32-795334BLK	*LOQUET 3/4 po 32-795334SC	12
INTIMITÉ - LEVIER DE SALLE DE BAINS (BOUTON-POUSSOIR INTÉRIEUR)		32-7940BLK	32-7940	12
			*CLUTCH MECHANISM 32-5940	12
			*3/4" LATCH 32-794034SC	12
PASSAGE - LEVIER DE VESTIBULE/PLACARD		32-7910BLK	32-7910	12
			*3/4" LATCH 32-791034SC	12
SALLE D'ENTREPOSAGE		32-7980BLK	32-7980	12
	*MÉCANISME D'EMBRAYAGE	32-5980BLK	*MÉCANISME D'EMBRAYAGE 32-5980	12
	*LOQUET 3/4 po	32-798034BLK	*LOQUET 3/4 po 32-798034SC	12
SALLE DE CLASSE		32-7970BLK	32-7970	12
	*MÉCANISME D'EMBRAYAGE	32-5970BLK	*MÉCANISME D'EMBRAYAGE 32-5970	12
	*LOQUET 3/4 po	32-797034BLK	*LOQUET 3/4 po 32-797034SC	12
PASSAGE DE COMMUNICATION - SORTIE SANS CLÉ		32-7925BLK	32-7925	12
			*LOQUET 3/4 po 32-792534SC	12
FAUSSE GARNITURE - LEVIER À UN CÔTÉ		32-7993BLK	32-7993	40