
# Taymor | PRODUCT SPECIFICATIONS

# **CALEDONIA**



POLISHED CHROME




## **FEATURES**

- TWO LEVER HANDLES WITH HIGH ARC SWIVEL SPOUT
- AVAILABLE IN POLISHED CHROME AND PVD SATIN NICKEL
- FITS STANDARD 8" THREE HOLE SINK
- WASHERLESS CARTRIDGE
- MAXIMUM FLOW RATE: 2.2 GPM/8.3 LPM @ 60 PSI
- FACTORY PRESSURE TESTED
- cUPC CERTIFIED
- LOW LEAD COMPLIANT





#### CRITICAL DIMENSIONS NOT TO SCALE

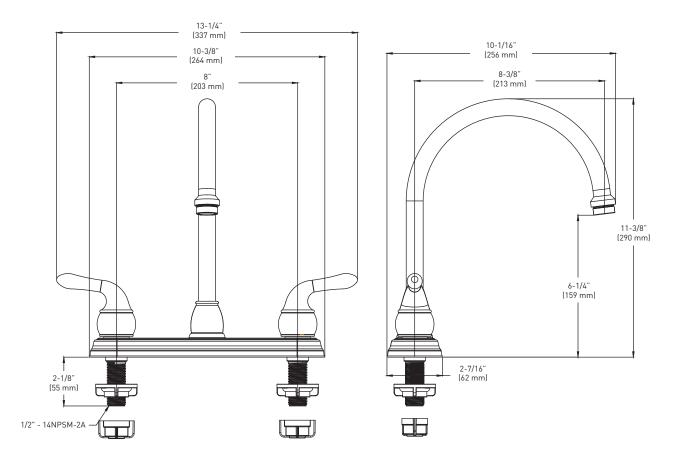

#### CONSTRUCTION

- METAL CONSTRUCTION WITH VARIOUS FINISHES IDENTIFIED BY SUFFIX
- PLASTIC VALVE BODIES

## MOUNTING

• DESIGNED TO INSTALL THROUGH 3 HOLES, 7/8" (23mm) MIN. DIA. WITH 8" (203mm) CENTERS, ON DECKS UP TO 1-1/8" (28mm)

#### INLET

• 1/2"-14 NPSM THREADED MALE INLET SHANKS

#### **OPERATION**

- QUARTER-TURN LEVER STYLE HANDLES
- OPERATES WITH LESS THAN 5 LBS. OF FORCE

#### WATER-CONTROL MECHANISM

- CARTRIDGE
- ROTATING CYLINDER TYPE WITH STAINLESS STEEL PLATE AND NON-METALLIC SEATS

#### **FLOW**

 AERATOR LIMITS MAXIMUM FLOW RATE TO 2.2 GPM MAX. (8.3 L/MIN.) @ 60 PSI

#### CODES/STANDARDS APPLICABLE

- cUPC
- ASME A112.18.1/CSA B125.1
- ANSI/NSF 372
- LOW LEAD COMPLIANT

# GUARANTEE

- LIMITED LIFETIME GUARANTEE AGAINST DEFECTS IN MATERIAL AND WORKMANSHIP TO ORIGINAL CONSUMER PURCHASER
- 5 YEAR WARRANTY IF USED IN INDUSTRIAL, COMMERCIAL AND BUSINESS INSTALLATIONS





| DESCRIPTION   | POLISHED | PVD SATIN  | CASE |
|---|----------|------------|------|
|   | CHROME   | NICKEL     | QTY. |
| TWO LEVER HANDLE KITCHEN FAUCET<br>WITH HIGH ARC SWIVEL SPOUT | 06-8701L | 06-8701LSN | 6    |

