Taymor | PRODUCT PREMIER SPECIFICATIONS LINE

SLIP STREAM

SPECIFICATIONS

- UNIVERSAL 6-IN-1 LATCH: DRIVE IN, SQUARE MORTISE AND RADIUS CORNER WITH ADJUSTABLE BACKSET: 2-3/8" (60 mm) - 2-3/4" (70 mm)
- STANDARD BORE HOLES: 2-1/8" (54 mm)
- FITS STANDARD DOOR THICKNESS: 1-3/8" (35 mm) 1-3/4" (45 mm)
- FULL LIP RADIUS CORNER STRIKE WITH ADJUSTABLE TAB STANDARD: 1-3/4" x 2-1/4" (45 mm x 57 mm)
- PUSH BUTTON AUTO-RELEASE ON PRIVACY FUNCTION








ANSI GRADE 3



LIMITED LIFETIME MECHANICAL & FINISH WARRANTY

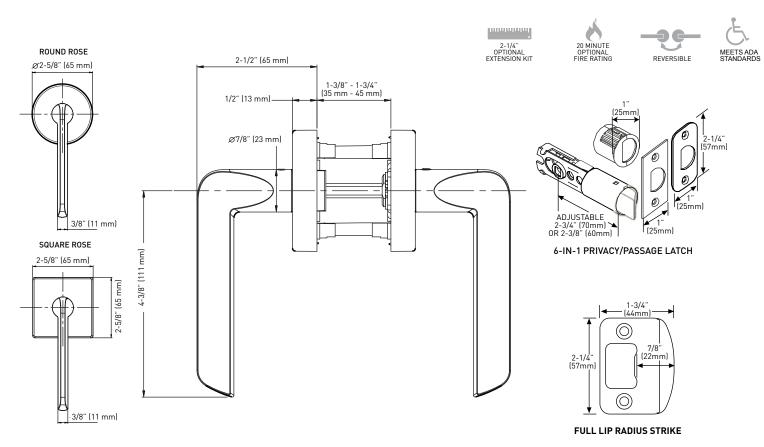

MEASUREMENTS SUBJECT TO A 3% VARIANCE

MEASUREMENTS ARE FOR REFERENCE ONLY, TAYMOR RESERVES THE RIGHT TO CHANGE THE PRODUCT SPECS WITHOUT NOTICE. FOR PRODUCT WARRANTY, PLEASE VISIT TAYMOR WEBSITE FOR DETAILS

SLIP STREAM - ROUND ROSE				CASE
BUILDER PACK	PRIVACY	PASSAGE	DUMMY	QTY.
SATIN NICKEL 15	30-D007224SN	30-D007234SN	30-724SN	20
MATTE BLACK 19	30-D007224BLK	30-D007234BLK	30-724BLK	20
POLISHED CHROME 26	30-D007224PC	30-D007234PC	30-724PC	20

SLIP STREAM - SQUARE ROSE BUILDER PACK	PRIVACY	PASSAGE	DUMMY	CASE QTY.
SATIN NICKEL 15	30-D007324SN	30-D007334SN	30-734SN	20
MATTE BLACK 19	30-D007324BLK	30-D007334BLK	30-734BLK	20
POLISHED CHROME 26	30-D007324PC	30-D007334PC	30-734PC	20

