


# MIRAFI E1200

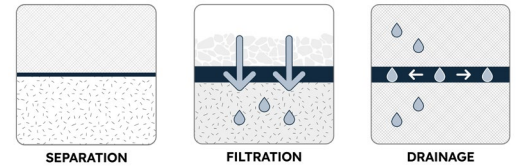

MIRAFI® E1200 is a needlepunched nonwoven geotextile composed of polypropylene fibers, which are formed into a stable network such that the fibers retain their relative position. MIRAFI E1200 is inert to biological degradation and resists naturally encountered chemicals, alkalis, and acids.

TenCate Geosynthetics Americas (A Solmax Company) is accredited by Geosynthetic Accreditation Institute – Laboratory Accreditation Program ([GAI-LAP](#)).

MIRAFI E1200 meets Build America, Buy America Act, Pub. L. No. 117-58, div. G §§ 70901-52.

MECHANICAL PROPERTIES	TEST METHOD	UNIT	MINIMUM AVERAGE ROLL VALUE
Grab Tensile Strength	ASTM D4632	lbs (N)	320 (1424)
Grab Tensile Elongation	ASTM D4632	%	50
Trapezoid Tear Strength	ASTM D4533	lbs (N)	125 (556)
CBR Puncture Strength	ASTM D6241	lbs (N)	900 (4005)
			<b>MAXIMUM OPENING SIZE</b>
Apparent Opening Size (AOS)	ASTM D4751	U.S. Sieve (mm)	100 (0.15)
			<b>MINIMUM ROLL VALUE</b>
Permittivity	ASTM D4491	sec <sup>-1</sup>	0.7
Permeability	ASTM D4491	cm/sec	0.13
Flow Rate	ASTM D4491	gal/min/ft <sup>2</sup> (l/min/m <sup>2</sup> )	50 (2037)
			<b>MINIMUM TEST VALUE</b>
UV Resistance (at 500 hours)	ASTM D4355	% strength retained	80
PHYSICAL PROPERTIES	TEST METHOD	UNIT	MINIMUM AVERAGE ROLL VALUE
Weight	ASTM D5261	oz/yd <sup>2</sup> (g/m <sup>2</sup> )	12.0 (407)
		UNIT	TYPICAL ROLL VALUE
Roll Dimensions (width x length)		ft (m)	15 x 300 (4.5 x 91)
Roll Area		yd <sup>2</sup> (m <sup>2</sup> )	500 (418)
Roll Weight		lb (kg)	400 (181)

365 South Holland Drive Pendergrass, GA 30567

Tel +1 706 693 2226 [www.tencategeo.us](http://www.tencategeo.us)



Solmax is not a design or engineering professional and has not performed any such design services to determine if Solmax's goods comply with any project plans or specifications, or with the application or use of Solmax's goods to any particular system, project, purpose, installation, or specification.  
FGS000825 ETQR03

