


# MIRAFI HP665

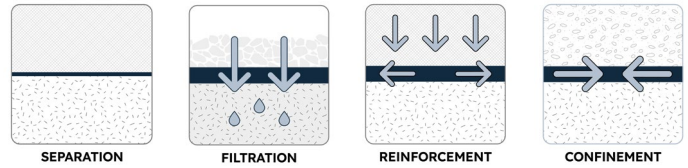

MIRAFI® HP665 is composed of high-tenacity monofilament polypropylene yarns, which are woven into a stable network such that the yarns retain their relative position. MIRAFI HP665 geotextile is inert to biological degradation and resists naturally encountered chemicals, alkalis, and acids

TenCate Geosynthetics Americas Laboratories are accredited by Geosynthetic Accreditation Institute – Laboratory Accreditation Program ([GAI-LAP](http://GAI-LAP.com)).

MECHANICAL PROPERTIES	TEST METHOD	UNIT	MINIMUM AVERAGE ROLL VALUE	
			MD	CD
Tensile Strength (at ultimate)	ASTM D4595	lbs/ft (kN/m)	5400 (78.8)	7500 (109.4)
Tensile Strength (at 5% strain)	ASTM D4595	lbs/ft (kN/m)	1200 (17.5)	4200 (61.3)
Grab Tensile Strength	ASTM D4632	lbs (N)	650 (2670)	700 (3115)
Grab Tensile Elongation	ASTM D4632	%	15	12
Trapezoid Tear Strength	ASTM D4533	lbs (N)	180 (801)	2700 (1202)
CBR Puncture Strength	ASTM D6241	lbs (N)	2000 (8900)	
<b>MINIMUM ROLL VALUE</b>				
Flow Rate	ASTM D4491	gal/min/ft <sup>2</sup> (l/min/m <sup>2</sup> )	20 (815)	
Permittivity	ASTM D4491	sec <sup>-1</sup>	0.26	
<b>MAXIMUM OPENING SIZE</b>				
Apparent Opening Size (AOS)	ASTM D4751	U.S. Sieve (mm)	40 (0.425)	
<b>MINIMUM TEST VALUE</b>				
UV Resistance (at 500 hours)	ASTM D4355	% strength retained	80	
PHYSICAL PROPERTIES		UNIT	ROLL SIZE	
Roll Dimensions (width x length)		ft (m)	15 x 300 (4.5 x 91)	
Roll Area		yd <sup>2</sup> (m <sup>2</sup> )	500 (418)	
Estimated Roll Weight		lbs (kgs)	543 (246)	

365 South Holland Drive Pendergrass, GA 30567

Tel +1 706 693 2226 [www.tencategeo.us](http://www.tencategeo.us)



Solmax is not a design or engineering professional and has not performed any such design services to determine if Solmax's goods comply with any project plans or specifications, or with the application or use of Solmax's goods to any particular system, project, purpose, installation, or specification.  
FGS000102 ETQR37

