


Windcrop

The connected rain gauge

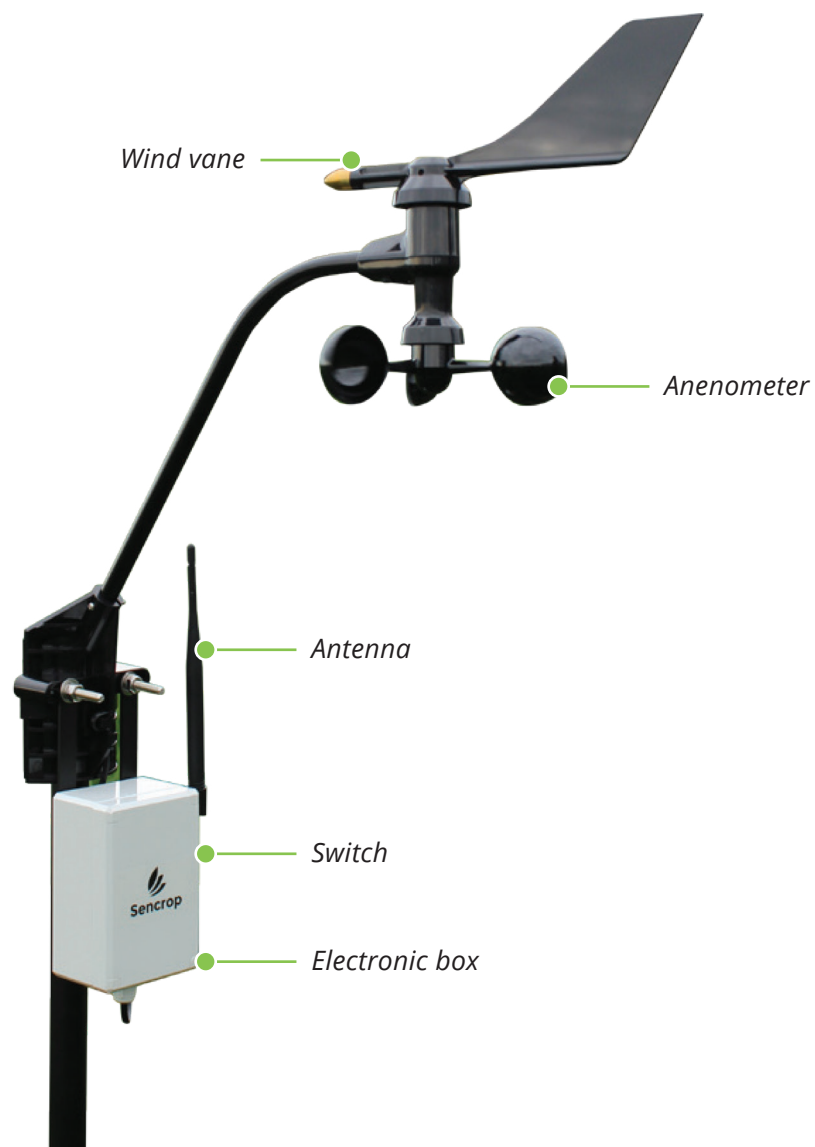

Specifications

Post	
Material	Steel with polyzinc treatment
Dimensions	Length 133 cm ; diameter 25 mm
Weight	3 kg
Anemometer	
Operating temperature range	0 - +85 °C
Wind speed (mean and gust)	
Measurement range	1 - 160 km/h
Accuracy	±3 km/h or ±5 % (the highest value)
Resolution	0.5 km/h
Mechanism	Wind cups
Principle of operation	Magnetic switch
Wind direction	
Measurement range	0 - 359°
Accuracy	± 7°
Resolution	1°
Mechanism	Wind vane
Principle of operation	Potentiometer
Materials	Wind vane and control head : UV-resistant ABS Wind cups : polycarbonate Arm : black-anodized aluminum
Accelerometer	
Movement detection threshold	0.3 g
GPS	
Integrated	Automated geolocation
Battery	
Battery	Lithium-Thionyl Chloride - 3.6 V - 19 Ah
Communication	
Network	Sigfox (Ultra Narrow Band)
Frequency band	ISM band at 868 MHz
Data transmission period	15 minutes
Data transmission duration	6 seconds (duty cycle < 1 %)
Data access	
Smartphone, tablet, personal computer	app.sencrop.com



Real time knowledge for rainfall-sensitive businesses.
Sencrop SAS - 2 rue Fourier - 59000 Lille - France
contact@sencrop.com

FR: +33 9 72 60 64 40 - UK: +44 20 34 99 73 16 - NL: +31 (0)6 13 64 01 57
ES: +34 910 920 138 - DE: +49 32 221 098 956