CRESCENT
UE-4-II-K

4 Input 4K/UHD HDMI Multiviewer with Advanced On-Screen Display (OSD) and KVM

Key Features

- 4 x HDMI 2.0 (4K@60Hz, 4:4:4) at full bandwidth
- Built-in KVM functionality by simply hovering over the selected window
- Low latency - single frame processing delay
- Low energy - only uses 110W of power
- Windows can be sized and moved freely
- Accepts UHD (HDMI 2.0) inputs
- Supports up to HDCP 2.3
- Supports up to 8 channels of LPCM audio (7.1, 5.1, 2.x)
- Output resolution up to 3840x2160@60Hz
- 1 x HDMI 2.0 (UHD) output
- 1 x 12G-SDI and 1 x 3G-SDI
- Ethernet for configuration and external control
- Dynamic UMD/Label and Tallies (TSL)
- Standalone labels and 2 customizable logos
- 1 digital and 1 analog clocks can by synced with LTC or NTP
- 32 GPIs for tallies, count up/down triggers or preset recalls
- Borders can be turned on or off
- 2 sets of safe area markers
- Visual alarm tags for format, video/audio presence
- Audio monitoring outputs - stereo, AES, SDI or HDMI
- 1 RU with redundant power supply
- 3 year limited warranty

Accessories

Standard

- Rackmount
- 4 x RJ50 to DB9 cables for GPI
- 4 x breakout terminal blocks
- RJ45 to DB9 cable for serial (RS-232)

CRESCENT

UE-4-II-K

Rear View

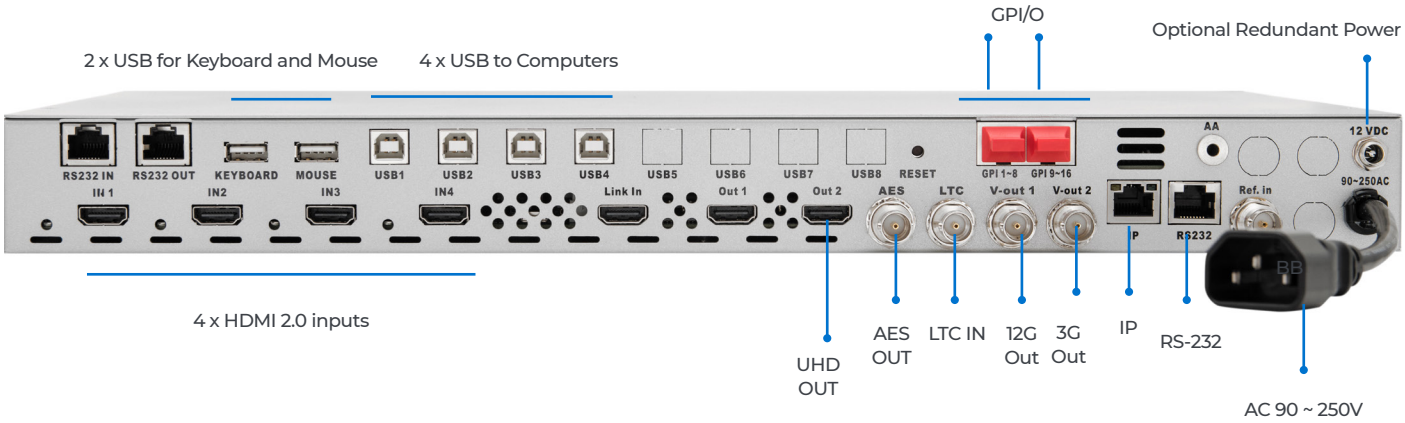

Related Products

UE-8-II-K
8 input 4K/UHD HDMI Multiviewer with KVM with advanced OSD

UE-8-II
8 input 4K/UHD HDMI Multiviewer with advanced OSD

UE-4-II
4 input 4K/UHD HDMI Multiviewer with advanced OSD

MiniDE-4-UHD-II
4 input 4K/UHD HDMI Multiviewer with no OSD

Specifications

Model	**UE-4-II-K**
Description	4 HDMI 2.0 UHD multiviewer with KVM functionality and advanced on-screen display (OSD)
Inputs	4 x HDMI 2.0 inputs + 4 USB to connecto to 4 computers, supports 8 channels of LPCM audio
Output	1 x HDMI 2.0, 1 x 12G SDI , 1 x 3G down converted SDI, 2 USB for keyboard and mouse
Max Resolution	Up to 3840x2160 @ 60Hz 4:4:4
Power	AC 90 to 250V with optional redundant power supply
Power Consumption	55W
Environment	Operating temperature: 0 ~ 45 C
	Operating humidity: 20 ~ 90% RH
	Storage temperature: -20 ~ 60 C
Dimension	1RU. 446 x 452 x 86 mm (L x W x H)
Weight	4.3 kg