

CRESCENT

UE-4-II-K

4 Input 4K/UHD HDMI Multiviewer with Advanced On-Screen Display (OSD) and KVM



Key Features

- 4x HDMI 2.0 inputs
- Built-in KVM functionality
- 1x HDMI 2.0 output
- Windows can be sized and moved freely
- Can be cascaded with UE-4-II to become an 8 input multiviewer with KVM functionality
- Decodes up to 8 embedded audio per HDMI input
- Ethernet for configuration and external control
- Dynamic UMD/Labels & Tally (TSL)
- Standalone labels
- Customizable logos
- 16 GPI triggers for Tally and count up/down triggers or preset recalls
- 1x digital and 1x analog clock can be sync'ed with LTC and NTP
- Borders can be turned on or off
- Visual alarm tags for video/audio detection and resolution
- 1 RU with optional redundant power supply
- 3 year limited warranty


Accessories

Standard

- Rack-mounts
- 2x RJ50 to DB9 cables for GPI
- 2x breakout terminal blocks
- RJ45 to DB9 cable for serial (RS-232)
- Analog audio breakout cable

Optional

- Redundant power supply

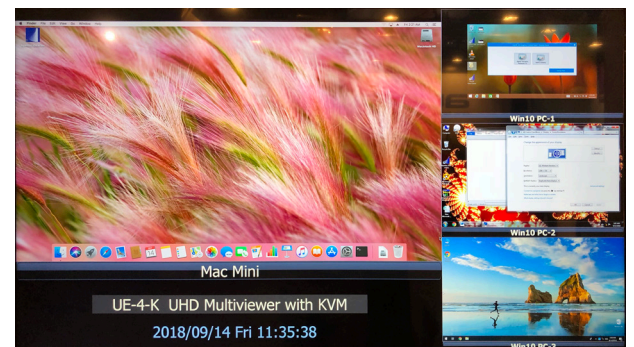

UE-4-K Layout Example


CRESCENT

UE-4-II-K

Rear View



UE-4-II-K cascaded with UE-4-II

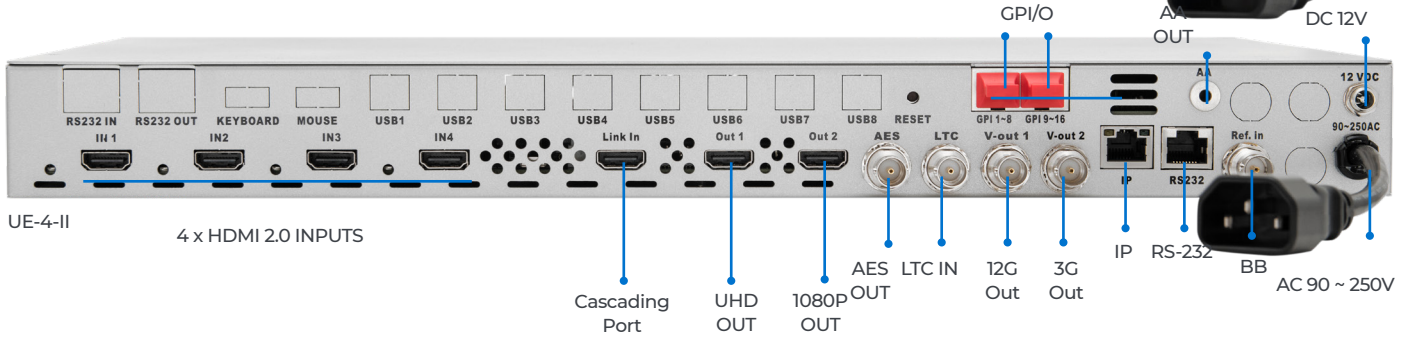

UE-4-II

4 x HDMI 2.0 INPUTS

Cascading Port

UHD OUT

1080P OUT

AES OUT

LTC IN

12G Out

3G Out

GPI/O

AA OUT

BB

DC 12V

AC 90 ~ 250V

Specifications

Model	UE-4-II-K
Description	4 HDMI 2.0 UHD multiviewer with advanced on-screen display (OSD) and KVM
Inputs	4 x HDMI 2.0 with 1 x HDMI 2.0 cascading input
Output	Up to 4096x2160P, 1 x HDMI 2.0 (2160P), 1 x HDMI 1.4 (1080P), 1 x 12G SDI, 1 x 3G SDI
Max Resolution	4096x2160 @ 60Hz 4:4:4 (in max resolution mode, down converted outputs are not available in HDMI and SDI)
Power	AC 90 to 240V, optional DC redundant power supply
Power Consumption	55W
Environment	Operating temperature: 0 ~ 45 C
	Operating humidity: 20 ~ 90% RH
	Storage temperature: -20 ~ 60 C
Dimension	1RU. 446 x 452 x 87 mm (L x W x H)
Weight	4.3 kg