

TAHOMA

UE-4

4 Input 4K/UHD HDMI Multiviewer with Advanced On-Screen Display (OSD)




Key Features

- 4x HDMI 2.0 inputs
- 1x HDMI 2.0 output
- Windows can be sized and moved freely
- Decodes up to 8 embedded audio per HDMI input
- Ethernet for configuration and external control
- Dynamic UMD/Labels & Tally (TSL)
- Standalone labels
- Customizable logos
- 16 GPI triggers for Tally and count up/down triggers or preset recalls
- 1x digital and 1x analog clock can be sync'ed with LTC and NTP
- Borders can be turned on or off
- Visual alarm tags for video/audio detection and resolution
- 2 rack units
- Redundant power supplies
- 3 year limited warranty

Accessories

Standard

- Rackmount
- 2x RJ50 to DB9 cables for GPI
- 2x breakout terminal blocks
- RJ45 to DB9 cable for serial (RS-232)

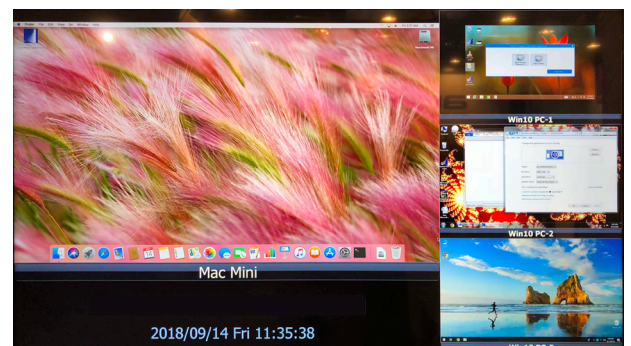


UE-4 Layout Example

TAHOMA

UE-4

Rear View

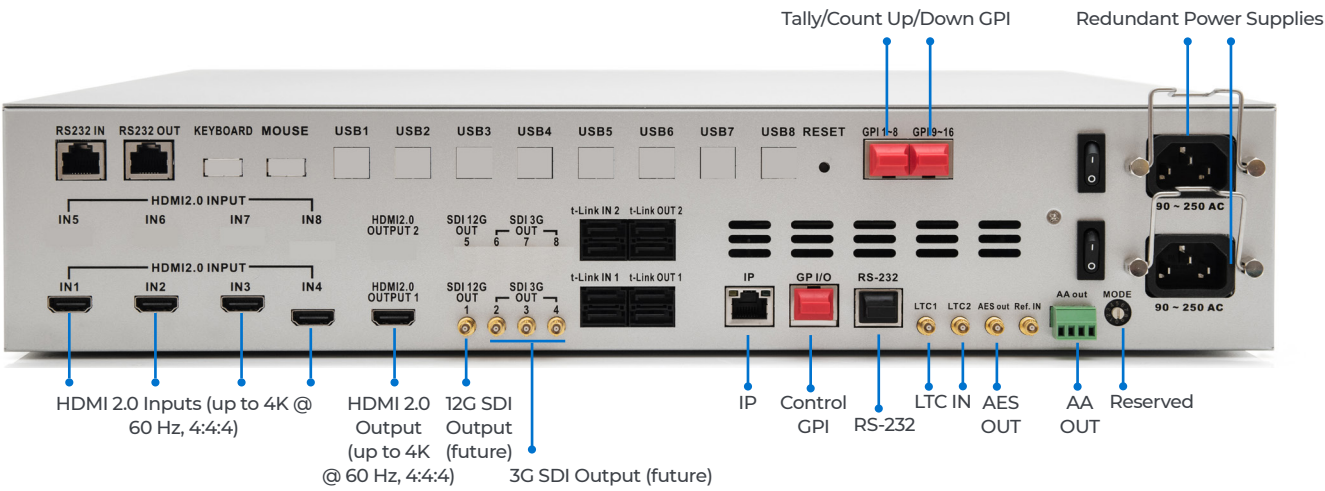

Related Products

UE-4-K

4 input 4K/UHD HDMI
Multiviewer with KVM
with advanced OSD

UE-8

8 input 4K/UHD HDMI
Multiviewer with advanced
OSD

UE-8-K

8 input 4K/UHD HDMI
Multiviewer with KVM
with advanced OSD

MiniDE-4-UHD-II

4 input 4K/UHD HDMI
Multiviewer with no OSD

Specifications

Model	UE-4
Description	4 input UHD HDMI multiviewer with advanced on-screen display (OSD)
Inputs	4x HDMI
Output	HDMI 2.0 UHD 4:4:4
Max Resolution	4096x2160 @ 60Hz 4:4:4
Power	Redundant AC inlet, 90 to 240V
Power Consumption	70W
Environment	Operating temperature: 0 ~ 45 C
	Operating humidity: 20 ~ 90% RH
	Storage temperature: -20 ~ 60 C
Dimension	2RU. 446 x 452 x 87 mm (L x W x H)
Weight	8.6 kg