

CRESCENT

8 Input 4K/UHD HDMI Multiviewer with Advanced On-Screen Display (OSD) and KVM



Key Features


- 8 x HDMI 2.0 (4K@60Hz, 4:4:4) at full bandwidth
- Built-in KVM functionality by simply hovering over the selected window
- Low latency - single frame processing delay
- Low energy - only uses 110W of power
- Windows can be sized and moved freely
- Output resolution up to 3840x2160@60Hz
- 1 x HDMI 2.0 (UHD) output
- 1 x 12G-SDI and 1 x 3G-SDI
- Ethernet for configuration and external control
- Dynamic UMD/Label and Tallies (TSL)
- Standalone labels and 2 customizable logos
- 2 digital and 2 analog clocks can be synced with LTC or NTP
- 32 GPIs for tallies, count up/down triggers or preset recalls
- Borders can be turned on or off
- 2 sets of safe area markers
- Visual alarm tags for format, video/audio presence
- Audio monitoring outputs - stereo, AES, SDI or HDMI
- 2 RU with redundant power supply
- 3 year limited warranty

Accessories

Standard

- Rack-mounts
- 4 x RJ50 to DB9 cables for GPI
- 4 x breakout terminal blocks
- RJ45 to DB9 cable for serial (RS-232)

Rear View

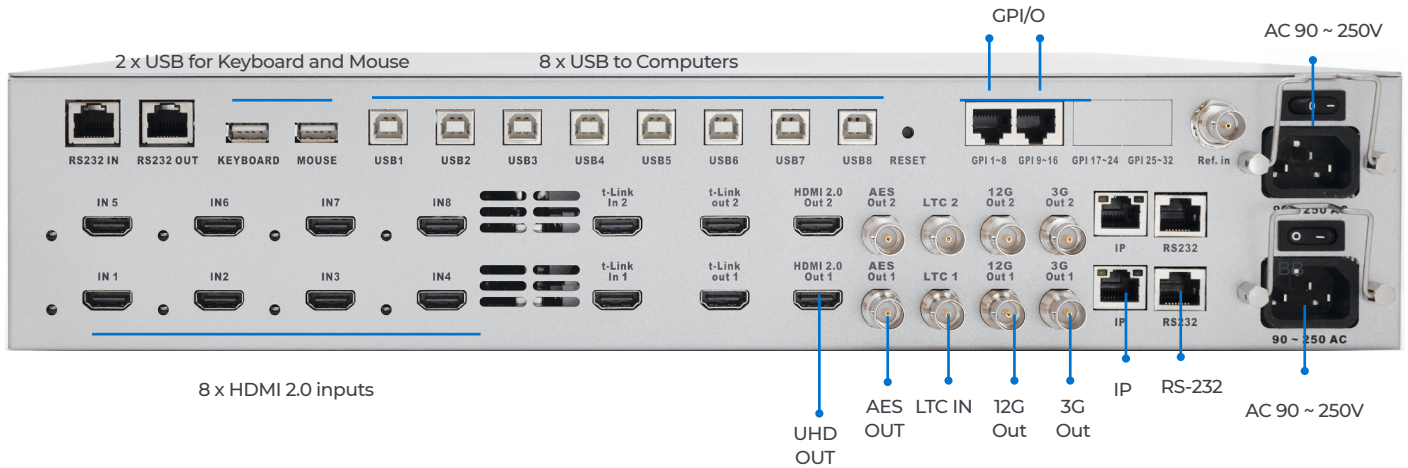

Related Products

UE-4-II-K

4 input 4K/UHD HDMI
Multiviewer with KVM
with advanced OSD

UE-8-II

8 input 4K/UHD HDMI
Multiviewer with advanced
OSD

UE-4-II

4 input 4K/UHD HDMI
Multiviewer with advanced
OSD

MiniDE-4-UHD-II

4 input 4K/UHD HDMI
Multiviewer with no OSD

Specifications

Model	UE-8-II-K
Description	8 HDMI 2.0 UHD multiviewer with KVM functionality and advanced on-screen display (OSD)
Inputs	8 x HDMI 2.0 inputs + 8 USB to connect to 8 computers
Output	1 x HDMI 2.0, 1 x 12G SDI, 1 x 3G down converted SDI, 2 USB for keyboard and mouse
Max Resolution	Up to 3840x2160 @ 60Hz 4:4:4
Power	Redundant AC 90 to 250V
Power Consumption	110W
Environment	Operating temperature: 0 ~ 45 C
	Operating humidity: 20 ~ 90% RH
	Storage temperature: -20 ~ 60 C
Dimension	2RU. 446 x 452 x 174 mm (L x W x H)
Weight	8.3 kg