


MT Hood

DP-1x4-II

DisplayPort 1x4 DA/Splitter

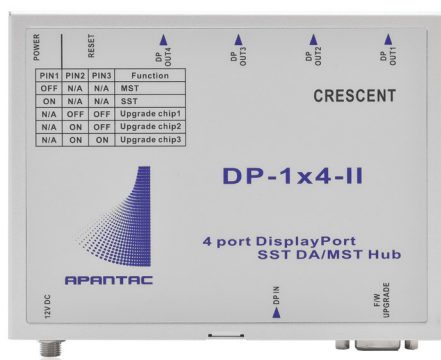

DP-1x4-II

Key Features

- Supports DisplayPort 1.2a
- Supports Displayport HDCP 1.3
- Supports HBR2/HBR/RBR
- Maximum bandwidth of 21.6GHz
- Support SST and MST Mode
- Compliant with DisplayPort 1, 2 or 4 lanes

Front View



- 1x 12V DC power inlet
- 1x DisplayPort input

Rear View



- 4 x DisplayPort outputs
- 1x reset key
- 1x DIP switch for SST and MST setting
- 1x power status LED

Related Products

DP-1x2-II

1x2 DisplayPort distribution amplifier

HDM2.0-1x2-II

1x2 HDMI 2.0 distribution amplifier

Specifications

Model	DP-1x4-II	Reset Key	1 x TACT SW
Input	1x DP	Power Status	1x Green LED
Output	4x DP	Power	12V DC 1A
Maximum Data Rate	21.6 Gpbs	Weight	310 g
Link Rate	HBR2, HBR, RBR	Dimensions	152 x 114 x 25 mm
Dip Switch	2 pin: SST/MST selection	Environment	Operating temperature: 0 ~ 40 C, Storage temperature : -20 ~ 60 C Humidity: 0 - 80% RH (non-condensing)