

TAHOMA

UE-4-K

4 Input 4K/UHD HDMI Multiviewer with Advanced On-Screen Display (OSD) and KVM




Key Features

- 4x HDMI 2.0 inputs
- Built-in KVM functionality
- 1x HDMI 2.0 output
- Windows can be sized and moved freely
- Decodes up to 8 embedded audio per HDMI input
- Ethernet for configuration and external control
- Dynamic UMD/Labels & Tally (TSL)
- Standalone labels
- Customizable logos
- 16 GPI triggers for Tally and count up/down triggers or preset recalls
- 1x digital and 1x analog clock can be sync'ed with LTC and NTP
- Borders can be turned on or off
- Visual alarm tags for video/audio detection and resolution
- 2 rack units
- Redundant power supplies
- 3 year limited warranty

Accessories

Standard

- Rackmount
- 2x RJ50 to DB9 cables for GPI
- 2x breakout terminal blocks
- RJ45 to DB9 cable for serial (RS-232)
- Analog audio breakout cable

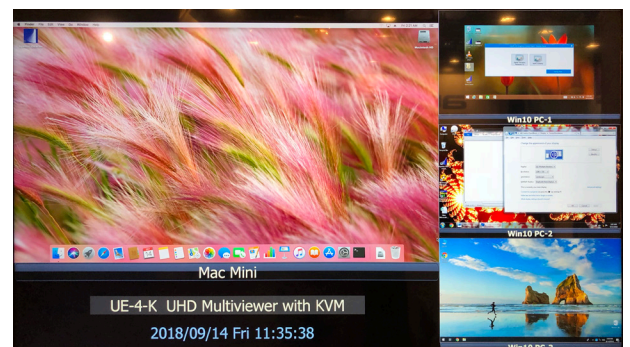


UE-4-K Layout Example

TAHOMA

UE-4-K

Rear View

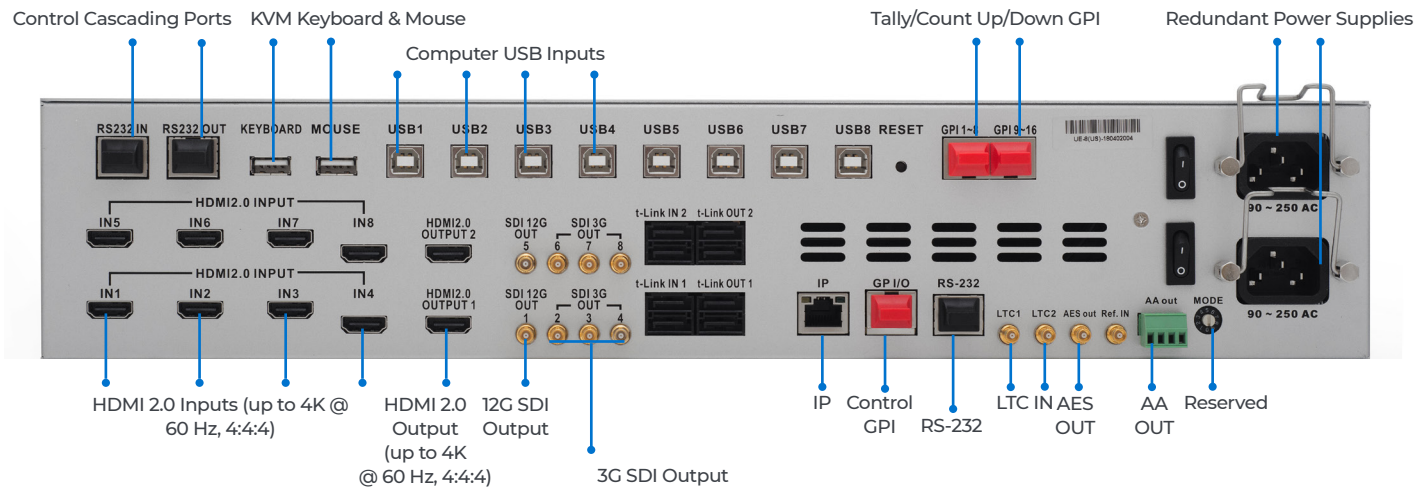

Related Products

UE-4 4 input 4K/UHD HDMI Multiviewer with advanced OSD	UE-8 8 input 4K/UHD HDMI Multiviewer with advanced OSD	UE-8-K 8 input 4K/UHD HDMI Multiviewer with KVM with advanced OSD	MiniDE-4-UHD-K 4 input 4K/UHD HDMI Multiviewer with KVM with no OSD
--	--	---	---

Specifications

Model	UE-4-K
Description	4 input UHD HDMI multiviewer with advanced on-screen display (OSD) and KVM
Inputs	4x HDMI 2.0
Output	HDMI 2.0 UHD 4:4:4 with quad-split multiviewer
Max Resolution	4096x2160 @ 60Hz 4:4:4
Power	Redundant AC inlet, 90 to 240V
Power Consumption	70W
Environment	Operating temperature: 0 ~ 45 C
	Operating humidity: 20 ~ 90% RH
	Storage temperature: -20 ~ 60 C
Dimension	2RU. 446 x 452 x 87 mm (L x W x H)
Weight	8.6 kg