


MT Hood

SDM-ST-2110

ST-2110 / IPMX Receiver for SDM

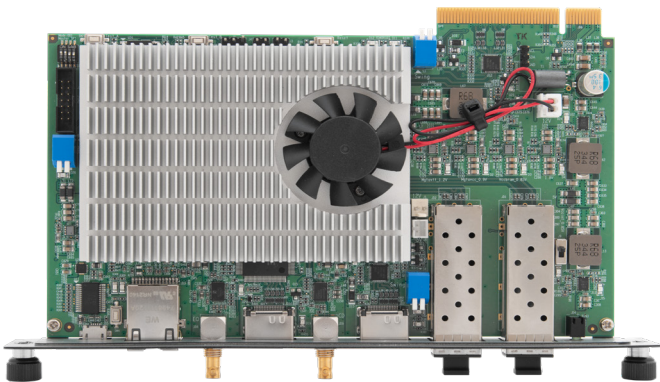

SDM-NDI-R



Key Features

- ST-2110 receiver for SDM-L
- SMPTE ST 2110 Decoder -10, -20, -21, -22, -30, -31, -40
- SMPTE ST 2059 Time Synchronization (PTP) -1, -2
- Supports uncompressed IPMX mode
- Auto clock recover when in IPMX mode
- RTP Failsafe (ST-2022-7)
- NMOS IS-04, IS-05 support
- Redundant 25 Gbps Ethernet Interface
- 1 Gbps Ethernet interface over RJ45

Related Products

- SDM-HDBT-R-UHD**
SDM UHD HDBaseT Receiver
- SDM-SDI-HDTV-UHD**
SDM 12G SDI Receiver
- SDM-SDVoE-R**
SDM SDVoE Receiver

Specifications

Model	SDM-ST-2110
Input	Dual 25G SFP
Output	SDM Connector
Dimensions	195 mm Width x 112 mm Depth
Power Consumption	Up to 20 W
Environment	Operating temperature: -20C ~ 60C, Humidity: 10%~90% / non-condensing