

KICHLER®

KICHLER PHOTOMETRIC LAB

Filename: DTC Slim 4" Round 12.5W-Photometric Report

Manufacturer: Kichler Lighting LLC

Luminaire: DLSL04R2790WHT

Luminaire Cat: CTR181086-02

Lamp: Integrated LED AC

Lamp Output: Total luminaire Lumens: 787.4

Max Candela: 293.2 at Horizontal: 170°, Vertical: 1°

Input Wattage: 12.5

Luminous Opening: Circular (Dia: 3.12")

Test: LM-79 Distribution

Test Lab: Kichler Lighting LLC

Photometry: Type C

Nema Type: 7 X 7

Roadway Summary

Cutoff Classification:	FULL CUTOFF
Distribution:	Type VS
Max Cd, 90 Deg Vert:	0
Max Cd, 80 to <90 Deg:	33.8
Lumens % Lamp	
Downward Street Side:	395.4 50.2%
Downward House Side:	392.1 49.8%
Downward Total:	787.5 100%
Upward Street Side:	0 0%
Upward House Side:	0 0%
Upward Total:	0 0%
Total Lumens:	787.5 100%

Zonal Lumen Summary




Zone	Lumens	% Luminaire
0-30	223.9	28.4%
0-40	362.6	46%
0-60	626.4	79.6%
60-90	161.0	20.4%
70-100	68.2	8.7%
90-120	0	0%
0-90	787.4	100%
90-180	0	0%
0-180	787.4	100%

Flood Summary


	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%):	98.4%	774.5	160.9	160.7
Beam (50%):	68.9%	542.9	106.3	106.1
Total:	100%	787.3		

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	27.6	3.5%	90-100	0	0%
10-20	78.7	10.0%	100-110	0	0%
20-30	117.6	14.9%	110-120	0	0%
30-40	138.7	17.6%	120-130	0	0%
40-50	140.2	17.8%	130-140	0	0%
50-60	123.7	15.7%	140-150	0	0%
60-70	92.8	11.8%	150-160	0	0%
70-80	53.9	6.8%	160-170	0	0%
80-90	14.3	1.8%	170-180	0	0%

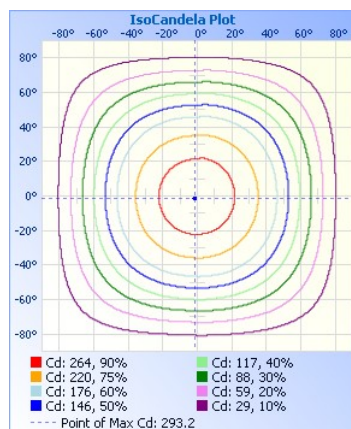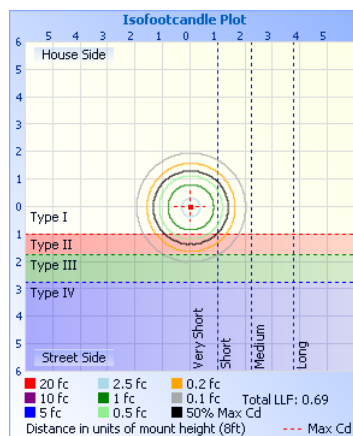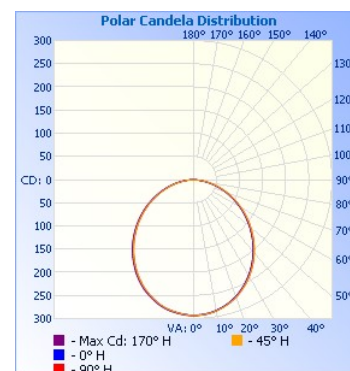

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.3ft	173 fc	3.5 ft	3.5 ft
2.7ft	40.1 fc	7.2 ft	7.2 ft
4.0ft	18.3 fc	10.6 ft	10.7 ft
5.3ft	10.4 fc	14.1 ft	14.1 ft
6.7ft	6.52 fc	17.8 ft	17.9 ft
8.0ft	4.57 fc	21.3 ft	21.3 ft
Vert. Spread: 106.1°			
Horiz. Spread: 106.3°			

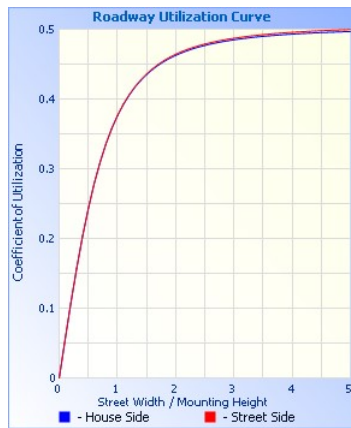

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80				70				50				30				10				0
RW %:	70	50	30	0	70	50	30	0	50	30	20	10	50	30	20	10	50	30	20	10	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.02	1.00	1.00
1	1.09	1.04	1.00	.96	1.06	1.02	.98	.85	.98	.94	.91	.89	.94	.91	.89	.90	.88	.86	.84	.84	.84
2	.99	.91	.84	.78	.96	.89	.83	.71	.85	.80	.76	.74	.82	.78	.74	.79	.75	.72	.70	.70	.70
3	.90	.80	.72	.65	.88	.78	.71	.61	.75	.69	.64	.62	.73	.67	.62	.70	.65	.61	.59	.59	.59
4	.83	.71	.62	.55	.81	.70	.61	.52	.67	.60	.54	.54	.65	.59	.54	.63	.57	.53	.51	.51	.51
5	.76	.63	.54	.48	.74	.62	.54	.46	.60	.53	.47	.47	.58	.52	.47	.56	.51	.46	.44	.44	.44
6	.70	.57	.48	.42	.68	.56	.48	.40	.54	.47	.41	.41	.53	.46	.41	.51	.45	.41	.38	.38	.38
7	.65	.52	.43	.37	.64	.51	.43	.36	.49	.42	.37	.37	.48	.41	.36	.47	.41	.36	.34	.34	.34
8	.61	.47	.39	.33	.59	.47	.39	.32	.45	.38	.33	.33	.44	.37	.33	.43	.37	.32	.30	.30	.30
9	.57	.44	.35	.30	.55	.43	.35	.29	.42	.35	.30	.30	.41	.34	.29	.40	.34	.29	.27	.27	.27
10	.53	.40	.32	.27	.52	.40	.32	.27	.39	.32	.27	.27	.38	.31	.27	.37	.31	.27	.25	.25	.25

-	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0		
53.75	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0	
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0	
56.25	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0	
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0	
58.75	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0	
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2	0.2	0	
61.25	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.2	0.2	0	
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0
63.75	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0
66.25	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0
68.75	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0
71.25	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0
73.75	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0
76.25	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
78.75	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
81.25	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
83.75	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
86.25	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
88.75	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Maximum lm: 0.5
Field lm: 774.5
Total lm: 787.3

[illegible]

[illegible]

file:///C:/ProgramData/PhotometricsPro/temp/DTC Slim 4 Round 12.5W-Photometric ... 7/15/2020

Luminaire Report Summary

IESNA:LM-63-2002
[TEST] LM-79 Distribution
[TESTLAB] Kichler Lighting LLC
[ISSUEDATE] 6/12/2020
[MANUFAC] Kichler Lighting LLC
[LUMCAT] CTR181086-02
[LUMINAIRE] DLSL04R2790WHT
[LAMP] Integrated LED AC

FILE: CREATED USING ABSOLUTE PHOTOMETRY
FILE: CANDELA MULTIPLIER: 1
FILE: VERTICAL ANGLES: 181, HORIZONTAL ANGLES: 73
FILE: COORDINATE SYSTEM: TYPE C
FILE: UNIT OF MEASURE: STANDARD
FILE: BALLAST FACTOR: 1

Photometrics Pro 1.3.29 copyright 2003-2020 by jsolutions, Inc.
Reported data calculated from manufacturer's data file, based on IES recommended methods.