
CAUTION – RISK OF SHOCK –
Disconnect Power at the main circuit breaker panel or main fusebox before starting and during the installation.

1) Thread small threaded pipe**[1]** into end of second loop**[2]**. Pass threaded pipe on loop up through hole in canopy**[3]**.
2) Thread lockwasher**[4]** onto end of threaded pipe protruding from inside canopy.
3) Thread hexnut**[5]** onto threaded pipe protruding from inside canopy.
4) Attach one end of chain**[6]** to loop**[7]** on top of roof. Attach other end of chain to small loop on canopy.
5) Weave electrical wire and ground wire through chain links no more than 3 inches apart.
6) Find the appropriate threaded holes on mounting strap**[8]** that align with hole distance in canopy. Thread mounting screws**[9]** into threaded holes starting from outlet box**[10]** side.
7) Attach mounting strap to outlet box with strap mounting screws**[11]**. Mounting strap can be adjusted to suit position of fixture.
8) Grounding instructions: (See Illus. A or B).
   A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
   B) On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.


   If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector. After following the above steps. Never con¬nect ground wire to black or white power supply wires.

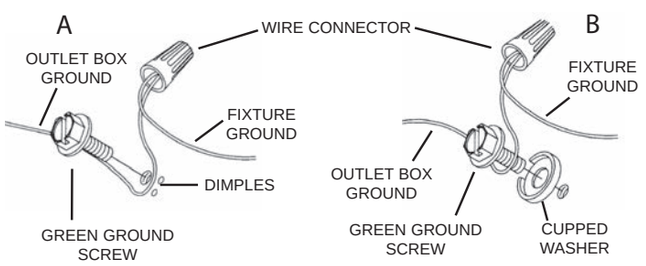


9) Make wire connections. Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



10) Push fixture to ceiling, carefully passing mounting screws through holes in canopy.
11) Thread lock-up knobs**[12]** onto mounting screws. Tighten knobs to secure fixture to ceiling.
12) Raise glass**[13]** up into fixture, pass the smaller opening of the glass over socket**[14]**. Rest the top of the glass against the pads in the fixture roof.
13) Thread the socket ring**[15]** onto the socket. Tighten to secure the glass in place. (Do not over-tighten).
14) Insert recommended bulb (Not supplied).

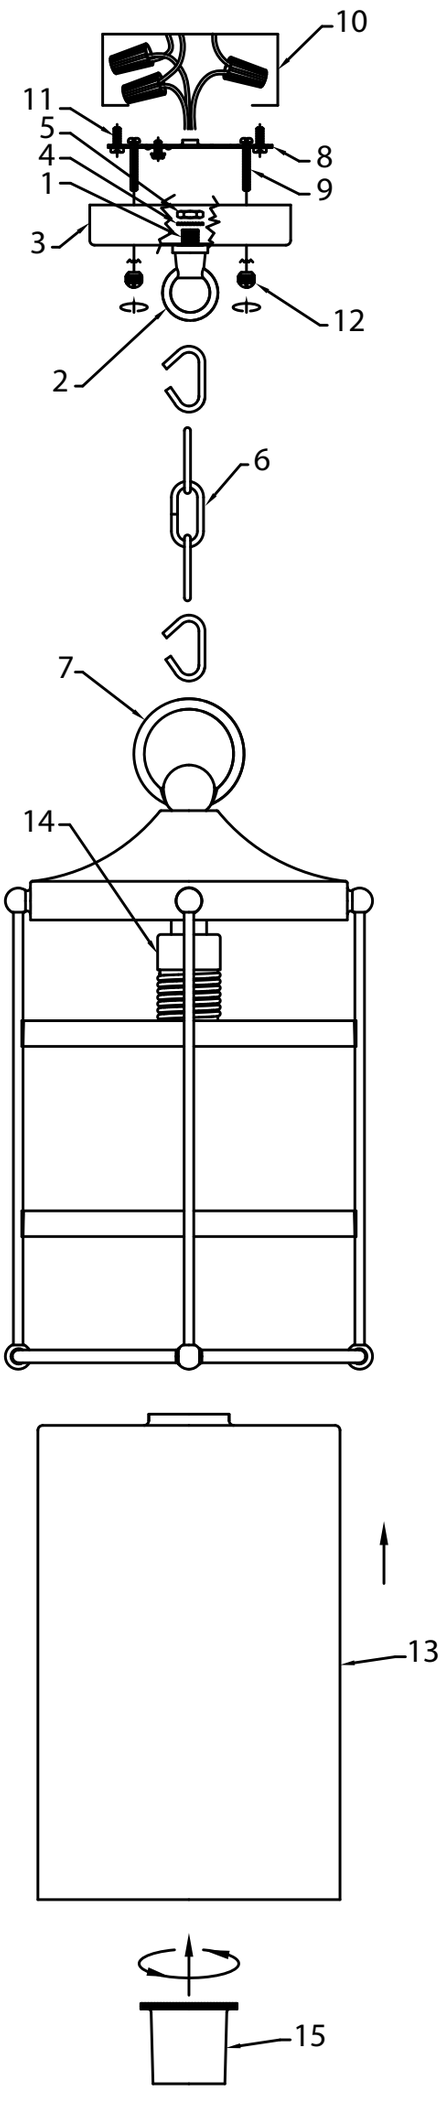

KICHLER

INSTRUCTIONS
For Assembling and Installing Fixtures in Canada
Pour L'assemblage et L'installation Au Canada


Nous sommes là pour vous aider 866-558-5706
Heures : du lundi au vendredi, de 9h à 17h (heure de l'Est)

ATTENTION – RISQUE DE DÉCHARGES ÉLECTRIQUES - Couper le courant au niveau du panneau du disjoncteur du circuit principal ou de la boîte à fusibles principale avant de procéder à l'installation.

1) Visser le petit tube fileté dans l'extrémité de la seconde boucle**[1][2]** Passer le tube fileté sur la boucle jusqu'à l'à travers le trou dans le cache**[3]**.
2) Visser une rondelle de blocage sur l'extrémité du tube fileté sortant du cache**[4]**.
3) Visser un écrou hexagonal sur le tube fileté sortant du cache**[5]**.
4) Fixer une extrémité de la chaîne à la boucle au-dessus du luminaire**[6][7]**. Fixer l'autre extrémité de la chaîne à la boucle sur le cache.
5) Passer le fil électrique et le fil de terre d'un maillon à l'autre de la chaîne avec une distance maximale de 7,5 cm entre.
6) Trouvez les trous filetés appropriés sur la sangle de montage **[8]** qui s'alignent sur la distance du trou dans la verrière. Enfiler les vis de fixation **[9]** dans les trous filetés à partir du côté sortie de la boîte **[10]**.
7) Fixez la sangle de montage à la boîte de sortie avec les vis de fixation de la sangle **[11]**. La sangle de montage peut être réglée en fonction de la position du luminaire.
8) Connecter les fils (connecteurs non fournis). Se reporter au tableau ci-dessous pour faire les connexions.

Connecter le fil noir ou rouge de la boite	Connecter le fil blanc de la boîte
A Noir	A Blanc
*Au cordon parallèle (rond et lisse)	*Au cordon parallele (à angles droits el strié)
Au bransparent, doré, marron, ou noir sans fil distinctif	Au transparent, doré, marron, ou noir avec un til distinctif
Fil isolé (sauf fil vert) avec conducteur en cuivre	Fil isolé (sauf fil vert) avec conducteur en argent

*Remarque: Avec emploi d'un fil paralléle (SPT I et SPT II). Le fil neutre est á angles droits ou strié et l'autre fil doit étre rond ou lisse (Voir le schéma).



9) Pousser le luminaire vers le plafond en passant soigneusement les vis de montage par les trous dans le cache.
10) Boutons de verrouillage de fil **[12]** sur les vis de montage. Serrez les boutons pour fixer le luminaire au plafond.
11) Soulever le verre **[13]** dans le luminaire, passer l'ouverture plus petite du verre sur la douille **[14]**. Reposez le dessus du verre contre les tampons dans le toit de l'appareil.
12) Enfiler la douille **[15]** sur la prise. Serrer pour fixer le verre en place. (Ne pas trop serrer).
13) Insérez l'ampoule recommandée (non fournie).

