

Spirent AION

Spirent TestCenter 5G Fronthaul Bundle

Overview

Spirent AION is a flexible delivery platform that enables users to achieve improved deployment and provisioning for all their cloud and network testing needs. It is designed to deliver ultimate flexibility in how Spirent TestCenter platforms are purchased and utilized.

The extended platform combines a wealth of industry-leading test solutions with a flexible licensing architecture to support a wide range of next-generation solution-based domain applications.

AION offers a centralized management hub to help leverage software and hardware functionalities across all lab users and locations for a simplified management and decision-making process:

- **Flexible purchasing options** available via subscription, consumption-based, and perpetual plans, with the ability to license different bandwidth, scale, and protocol bundles.
- **Flexible deployment options** offered include cloud-delivery, on-prem, and laptop-hosted licensing services.

Enhanced user serviceability delivers always-on platform services from auto-discovery and inventory management to user and workspace administration, notifications, and log aggregation.

5G Fronthaul Bundle

Open Radio Access Network (O-RAN) is being adopted by service providers and equipment manufacturers to reduce infrastructure deployment cost and lower the barrier to entry for new product innovation.

The O-RAN Alliance is committed to evolving radio access networks with its aim to drive the mobile industry toward an ecosystem of innovative, multi-vendor, interoperable, and autonomous RAN, with reduced cost, improved performance, and greater agility.

Virtualized Radio Access Network

Virtualization entails the migration from custom-built network nodes to network functionality implemented in software running on generic hardware compute platforms. Virtualization for communications service providers began with the core network and subsequently cloud technologies have been evolving at a rapid rate. In the RAN domain, vendor agnostic commercial off-the-shelf (COTS) hardware has the potential to enable innovation across a range of software ecosystems.

O-DU Device Emulation with O-RAN and eCPRI

For full-stack RAN virtualization, the DU (Distributed Unit) is connected to the radio via a packet fronthaul interface known as enhanced Common Public Radio Interface (eCPRI), with multiple ways of dividing functions between the DU and the RRU (Remote Radio Unit).


eCPRI enables efficient and flexible radio data transmission via a packet based fronthaul transport network. eCPRI defines a protocol layer which provides various—mainly User Plane data specific—services to the upper layers of the protocol stack.

- **Fronthaul Validation**—in-depth and complete testing of Fronthaul O-RAN and eCPRI
- **Elaborate O-RAN Message Analysis**—actionable analytics & intuitive conformance summary reports via TestCenter IQ
- **Comprehensive Test Methodologies**—leverage ready-to-use methodologies for testing various bandwidth and subcarrier space
- **Multiple Vendor Interoperability**—emulate true multi-vendor environments to verify and ensure interoperability



Spirent TestCenter O-DU Device Emulation with O-RAN helps ensure the success of O-RAN adoption and deployment by enabling equipment manufacturers and service providers to test and integrate virtualized open radio access network in a true multi-vendor environment through comprehensive test methodologies.

5G Fronthaul Bundle is a comprehensive protocol package for Spirent TestCenter that includes eCPRI and O-RAN, enabling Network Equipment Manufacturers, Service Providers and chipset vendors to quickly evaluate and troubleshoot functionality, performance, and scalability of 5G fronthaul.

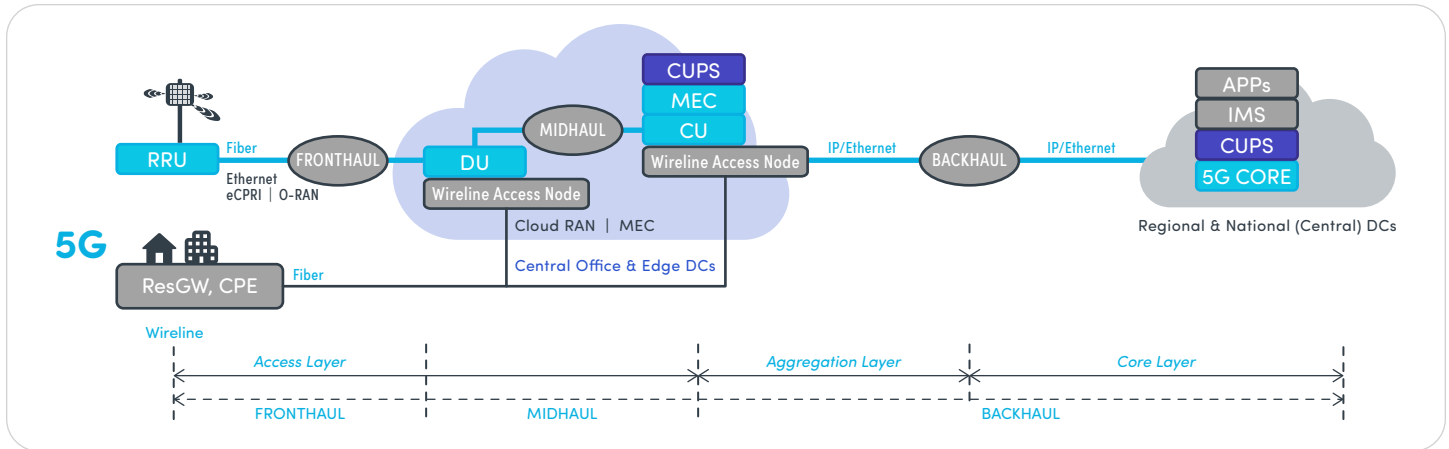

Features and Benefits

- Ability to emulate O-DU with user and control plane messages
- Support user configurable subcarrier spacing and bandwidth
- Support user configurable number of PRBs (pseudorandom binary sequence) to be requested in downlink and uplink messages
- Support IQ data compression using Block Floating Point algorithm and 9 bit IQ width
- Support user configurable gap time between uplink and downlink messages
- Analysis of the incoming messages for conformance to O-RAN specification
- Checks for the validity of CC (Component Carrier) ID, number of PRBs.
- Checks if uplink messages are received in correct sub-frame, slot, and Symbol ID
- Respond to incoming O-RAN messages from DUT with user defined conditions & messages
- Timing accuracy of $\pm 10\mu s$ for every Radio Frame of 10ms
- Jumbo frame support for user plane and application-level fragmentation
- Support user configurable control message processing time based on radio unit capabilities
- Support raw PDU template to construct any O-RAN packet and transport over eCPRI
- Generate O-RAN messages over eCPRI based on IQ vector input file
- Support sending user plane messages at 10/25/50/100G line rate
- Support eCPRI message concatenation
- User configurable eCPRI common header, PC ID, sequence ID, app header (payload size is auto calculated)
- Support for following eCPRI services: One-way delay measurement, Remote Reset, Remote Memory Access
- Support delay measurement with Request/Request with Follow up, Remote request, Remote request with Follow up (delay measurement to the accuracy of $1\mu s$)
- Facilitate multiple measurement tests and calculates min, max and average delay.
- Simulate failures with user configurable success rate for the Remote memory access message
- Respond to incoming eCPRI messages from DUT with user defined conditions and messages

Technical Specifications

Parameter	Description
ORAN-WG4.CUS.0-v01.00 O-RAN Fronthaul Working Group: Control, User and Synchronization Plane Specification	
O-RAN packet Generation from IQ samples	<ul style="list-style-type: none"> Downlink Control and Data message Uplink Control Message
Transport	<ul style="list-style-type: none"> eCPRI over Ethernet eCPRI over VLAN eCPRI over IPv4/UDP eCPRI over IPv6/UDP
Compression Method	Block Floating Point
IQ Width	9 Bit Mantissa
Sub Carrier Spacing (SCS)	<ul style="list-style-type: none"> $\mu = 0$ (15 kHz) $\mu = 1$ (30 kHz) $\mu = 2$ (60 kHz) $\mu = 3$ (120 kHz)
Bandwidth	20MHz, 25MHz, 40MHz, 50MHz, 60MHz, 80MHz, 100MHz, 200MHz, 400MHz
Frame size	<ul style="list-style-type: none"> Default MTU: 1500 bytes Jumbo frames (MTU = 2000 bytes) Auto-calculated number of PRBs based on SCS and Bandwidth Configurable number of PRBs per packet
Manual scheduling	<ul style="list-style-type: none"> Radio Frames Generation at 10ms time Support for Gap between Downlink and Uplink messages User configurable Control packet processing time based on Radio unit's capability
O-RAN analysis	<ul style="list-style-type: none"> Deep packet analysis of all the incoming uplink messages Validates CC ID and number of PRBs in uplink message Checks for the valid sub-frame, slot and Symbol IDs in incoming uplink message Pre-defined Health indicator to alert for any discrepancy in the incoming O-RAN packets
Wireshark decoder	Wireshark decoder to analyze the packets at the O-RAN level
Raw PDU template	Support for all the O-RAN Control Section types and Data message
ORAN-WG4.CUS.0-v01.00 O-RAN Fronthaul Working Group: Control, User and Synchronization Plane Specification	
eCPRI Packet generation	<ul style="list-style-type: none"> eCPRI message types [Type 0 – Type 7] eCPRI over Ethernet, Ethernet – VLAN, IPV4- UDP, and IPV6-UDP eCPRI message concatenation
Auto Frame Response*	<ul style="list-style-type: none"> User defined filters on eCPRI header fields for packet matching User configurable eCPRI response PDU for incoming eCPRI messages Auto-Frame response is supported on FX and MX series hardware modules.
eCPRI Control and User data messages	<ul style="list-style-type: none"> IQ Data Bit Sequence Real Time Control Data Generic Data Transfer
Remote Memory Access	<ul style="list-style-type: none"> Message types: <ul style="list-style-type: none"> Read request Write request Read response Write response Write no response User configurable success rate for simulates success and failure responses Pre-defined Health indicators to validate requests and response messages
One-way delay measurement	<ul style="list-style-type: none"> Action types: <ul style="list-style-type: none"> Request Request with Follow-up Remote-Request Remote request with follow-up One-way delay measurements Bulk message support to calculate minimum delay, maximum delay, and average delay Pre-defined health indicators to validate the request and response messages.
Remote Reset	<ul style="list-style-type: none"> Message types: <ul style="list-style-type: none"> Remote Reset Request Reset indication Pre-defined health indicators to validate the request and response messages
Wireshark decoder	Wireshark decoder for all eCPRI message types

Technical Specifications (cont'd)

Parameter	Description			
ETSI TS 138 211 V15.2.0 (2018-07)				
5G NR Frame and Sub-Frame Structure Sub Carrier Spacing 15KHz, 30KHz, 60KHz, 120KHz				
5G NR				
	μ	N slot symbol	N frame μ slot	N subframe μ slot
Slot configurations	0	14	10	1
	1	14	20	2
	2	14	40	4
	3	14	80	8

Ordering Information

Product Number	Description
AON-PB-5GFH	AION 5G Fronthaul Bundle

About Spirent Communications

Spirent Communications (LSE: SPT) is a global leader with deep expertise and decades of experience in testing, assurance, analytics and security, serving developers, service providers, and enterprise networks. We help bring clarity to increasingly complex technological and business challenges. Spirent's customers have made a promise to their customers to deliver superior performance. Spirent assures that those promises are fulfilled. For more information visit: www.spirent.com

Americas 1-800-SPIRENT

+1-800-774-7368 | sales@spirent.com

Europe and the Middle East

+44 (0) 1293 767979 | emeainfo@spirent.com

Asia and the Pacific

+86-10-8518-2539 | salesasia@spirent.com