

# Spirent B2 800G Appliance

## Native QSFP-DD800 Test Platform

Network bandwidth needs continue to grow at a rapid pace. Network equipment manufacturers are developing highly flexible multi-rate products to support the latest generation of High-Speed Ethernet devices. Service Providers and hyperscale data centers are deploying multi-rate networking infrastructure solutions to meet this growing market.

With these multi-rate requirements, customers demand higher density test equipment. Flexibility is needed to validate the next generation of routers and data center fabrics.

Spirent B2 800G Appliance was developed to meet these specific needs with its industry-leading 2x density advantage for QSFP-DD from nearest competitor. It is designed with 4-ports and supports 1x800G in addition to 2x400G, 4x200G, and 8x100G PAM4 modes in line with Ethernet Technology Consortium 800GBASE-R.


This appliance also supports Auto Negotiation and Link Training (AN/LT) for all speeds, and Spirent Smart Port Technology, a licensed feature that allows single port and speed upgrades for maximum value and flexibility.

## Applications

**Cloud Computing/Streaming Services**—Validate data plane QoS on thousands of flows at line rate and test complex routing, data center and access protocols on switches and routers.

**Data Center ToR and EoR Switches and Fabrics**—Validate forwarding performance, latency, MAC capacity and functional capabilities of ultra-high-scale, next generation enabled multi-terabit cloud data center fabrics. This platform will allow synchronized timing of 255 systems with no requirement for external timing devices or specialized cabling.

**Terabit Routers**—Test latest generation of core routers with high-scale, multiprotocol topologies.

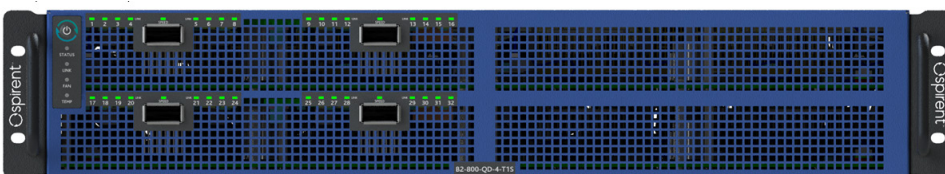

Spirent B2 800G Appliance

## Features

- Delivers the highest density High-Speed Ethernet solution
- Each port supports the following speeds: 1x800GbE, 2x400GbE, 4x200GbE, 8x100GbE, 8x50GbE PAM4
- Available single port upgrades
- Support for Ethernet (FEC), and Auto Negotiation (AN) and Link Training (LT) for all supported speeds and breakouts
- Protocol testing for L2/3 routing/switching and data center applications

## Benefits

- Industry's first and highest density QSFP-DD test appliance
- Provides large capacity testing for a variety of services

## Productivity

- Intelligent Results™
- User definable Health Indicator views provide real-time health monitoring and error isolation capability that allows engineers to accurately and quickly pinpoint errors, even in the most complex test configurations. Customizable Time Series charts, overlaid with Events, provide correlation between real-time metrics and system events, allowing rapid debugging of problems and accelerating development
- High performance database underneath a modern web UI processes billions of real-time results to validate tests, identify problems, and provide customizable reports
- Delivers more results with tight correlation, and more information to find those obscure bugs. With more coverage and more information, Spirent answers questions faster, and in a single test run, where multiple runs are necessary with other test tools
- Interesting streams uses real-time results data mining to dynamically filter through mountains of data and display the results that matter
- Powerful automation with Command Sequencer (Visual Programming) and GUI to Script empowers the test operator to:
  - Construct sophisticated, stressful, automated test cases without programming experience
  - Combine numerous individual test cases into a single run to save regression test time
  - Develop a catalog of broad automated test cases in a fraction of the time
  - Export automated test cases to run from a command line for headless test execution that can be integrated with any automated regression system

## Extensive, Flexible Reporting

Real-time statistics for critical variables across all protocols. Using Spirent's iTest platform, your device under test results can easily be correlated and compared with Spirent's results.

# Spirent B2 800G Appliance

Technical Specifications	
Spirent B2 800G Appliance	
MSA Interface	QSFP-DD800
Line clocking and packet time-stamping	Stratum-3 rated oscillator is the default time source. Transmit line clock is at the precise nominal Ethernet rate $\pm < 1$ PPM on initial shipment. Accurate to $\pm 4.6$ PPM 15 years of operation. <ul style="list-style-type: none"> <li>• Frame time-stamp resolution of 2.5ns</li> <li>• GPS and CDMA-based external time sources are supported</li> <li>• IEEE 1588v2 and NTP packet-based external time sources are supported</li> <li>• TIA/EIA-95B-based external time sources are supported</li> </ul>
Appliance time synchronization	Appliance Features <ul style="list-style-type: none"> <li>• Spirent-patented self-calibrating inter-chassis timing chain using dedicated port on chassis control</li> <li>• Appliance delivers precise synchronization <math>\pm 20</math>ns</li> <li>• Ability to daisy chain up to 255 appliances for large density testing</li> <li>• Synchronization via external GPS or CDMA network</li> <li>• Using IEEE 1588 or NTP packet-based approaches</li> <li>• With TIS/EIA-95B timing inputs</li> </ul>
Operating temperature range	Supported for 41° to 86° F (5° to 30° C) ambient temperature. 20% to 80% relative humidity
Max power draw	Maximum of 3600W at 200-240 VAC per rack mount
Product Dimensions	29.5 in L x 17 in W x 3.5 in H (2U)
Spirent TestCenter Layer 2-3 Generator and Analyzer	
Number of streams	<ul style="list-style-type: none"> <li>• Stats/Streams @800/400/200/100/50GbE: Tx=16K, Rx=32K</li> <li>• Stream fields can be varied to create billions of flows</li> <li>• Stats/Stream: Tx Count (frames), Rx Count(frames), Tx Rate (fps), Rx Rate (fps), Tx Rate (bps), Rx Rate (bps), Rx Sig Count (Frames), Avg Latency (us), Min Latency (us), Max Latency (us)</li> </ul>
Number of Paths/Raw Streamblocks	511; 255 when using list modifiers
Frame transmit modes	Port based (rate per port), stream based (rate per stream), burst, timed, random frame size with unique seed
Min/max frame size (w/CRC)	60 to 16,004
Min/max Tx rates	1 packet per 1.37 seconds to 101% of line rate
Real-time Tx stream adjustments	Change rate and frame length settings without stopping the generator or analyzer for truly interactive, cause and effect analysis
Per-stream statistics analyzed in real time	Tx and Rx frame counts and rates <ul style="list-style-type: none"> <li>• Tx and Rx Layer 1 byte counts and rates</li> <li>• Out of sequence errors</li> <li>• FCS errors and rate</li> <li>• Min, Max and Average Latency (32K streams)</li> <li>• Real Time Dropped Frame count</li> </ul>
Flow Control	Support Priority Flow Control
Per-port statistics analyzed in real time	Tx and Rx frame counts and rates <ul style="list-style-type: none"> <li>• Tx and Rx Layer 1 byte counts and rates</li> <li>• Out of sequence errors</li> <li>• PRBS errors</li> <li>• FCS errors and rate</li> </ul>
Transmit timestamp resolution	2.5 ns Tx timestamp resolution with intra-chassis and inter-chassis synchronization
Supported encapsulations	<ul style="list-style-type: none"> <li>• Layer 2: Ethernet II, 802.1Q, 802.1ad</li> <li>• Layer 3/4: IPv4, IPv6, TCP, UDP</li> </ul>
Supported Tx signature capability	Fully compatible with Spirent hardware; contains sequence number and highly accurate timestamp
Capture buffer size	8 MB per port

## Spirent B2 800G Appliance (cont'd)

### Technical Specifications

#### Spirent TestCenter Layer 2-3 Generator and Analyzer (cont'd)

Capture buffer controls— Spirent TestCenter's unique capture capability allows maximum effectiveness effectiveness when debugging hard to find hardware or protocol problems	Several modes of operation that include: Filter by protocol fields, filter by byte offset and range; store slices or full-frames; store signature or all frames; store Tx/Rx control plane with data plane; real-time mode for control plane traffic; wrap or stop buffer at end. User defined pattern definitions can logically combine 8 filters of up to 32 total bytes. Patterns can be applied to start, filter (quality) or stop capture. In addition to user-patterns, filtering, starting and stopping capture contains the following pre-defined events: FCS, PRBS, IPv4 checksum, TCP/UDP/IGMP checksum, and sequence errors; undersize, oversize, jumbo, and user-defined frame length; IPv4, IPv6, TCP, UDP and IGMP packets; test signature present and test stream ID match. Each event can be independently set to ignore, include or exclude. Support UDC (User Defined Counters), Capture byte offset mode, Capture pattern matching.
Latency modes	Benchmark tests support LIFO, LIFO, FIFO or FILO latency calculation methods
Route Insertion Table (RIT) entries per port	128K (800G & 400G), 32K (100G) 4-byte entries for dynamic label or random IP/MAC address assignments
RIT or List VFD entries per stream	8 RIT insertions per stream and 6 VFD insertions per stream

#### Layer 1 Functionality

QSFP Interconnects	CR, SR, LR, FR, DR, PSM4 at multi-rate (800/400/200/100GbE)
Media support and FEC options	Support varies by speed mode <ul style="list-style-type: none"> <li>800G: QSFP-DD DR8, QSFP-DD FR4</li> <li>400G: 400GBASE-SR8, 400GBASE-DR4, 400GBASE-LR8, 400GBASE-FR8, 400GBASE-LR4, 4x100G QSFP-DD LR, 400GBASE-FR4</li> <li>200G: 200GBASE-SR4, 200GBASE-PSM4, 200GBASE-LR/FR4, plus additional MSA PMDs</li> <li>100G: 100GBASE-SR2, 100GBASE-LR2, 100GBASE-DR2 plus additional MSA PMDs</li> <li>RS-544 (KP4) FEC all speeds</li> <li>Direct Access Copper breakouts</li> </ul>
AN/LT (Enable/Disable)	Direct Attach Copper (DAC), AN/LT supported for all speeds
Layer-1 debug tools & features	CR Tx Emphasis settings, Rx Eye view, FEC Counters, PRBS Gen/Check, Front-end L1 Summary Status, Xcvr MDIO access, PCS monitoring

#### Ordering Information

Part Number	Description
<b>Base Packages</b>	
B2-800-QD-4-1550A	B2 4-Port Native QSFP-DD800 800G/400G/200G/100G/50G Bundle
B2-800-QD-4-1300A	B2 4-Port Native QSFP-DD800 800G/400G/100G T1S Bundle
B2-800-QD-4-1200A	B2 4-Port Native QSFP-DD800 800G/400G T1S Bundle
B2-800-QD-4-800A	B2 4-Port Native QSFP-DD800 800G Only
<b>Hardware Upgrades (available as add on after purchase of initial base package bundle)</b>	
HWO-B2-800-QD-4-50G	8x50G PAM4 Hardware Speed Option for B2-800-QD-4-T1S
HWO-B2-800-QD-4-100G	8X100G PAM4 Hardware Speed Option for B2-800-QD-4-T1S
HWO-B2-800-QD-4-200G	4X200G PAM4 Hardware Speed Option for B2-800-QD-4-T1S
HWO-B2-800-QD-4-400G	2X400G PAM4 Hardware Speed Option for B2-800-QD-4-T1S
HWO-B2-800-QD-4-800G	1X800G PAM4 Hardware Speed Option for B2-800-QD-4-T1S
HWO-B2-800-QD-4-PORT	Spirent B2-400 QSFP-DD800-4P Single Port Enablement

## Requirements

- Windows-based workstation with 10/100/1000 Mbps Ethernet NIC; mouse and color monitor required for GUI operation
- Linux- or Windows-based workstation for automation scripting
- Mac-, Linux, or Windows-based workstation for Rest API support