


Make your artwork print-ready

To smoothly transition from the design stage to printing, we have a simple guideline to help you!

1 Set up your file

We recommend using our templates, but you can also set up your document size according to the **format** you have chosen and adding **0.125 in bleed**. As for the quality, **300 dpi resolution** is the standard to ensure crisp and clear prints.



0.125 in



Bleed

This area will be trimmed. Ensure all background graphics or images cover this area.

Trim Line

This is the final size your artwork will be trimmed to.





0.125 in

Safety Margin

Avoid placing text or important details within this area in case of trimming inaccuracies.

2 Is your card folded?

How is it folded? What's the best for your design? **Note that templates consist of 2 pages.** First page corresponds to the outside of the leaflet and the second page to the inside.



Folded once (lengthwise or widthwise) and is therefore divided equally.

Want to know more?


Visit our **helpcenter** or **contact** our experts for personal advice.

In case not all specs are matched, we will always manually process, adapt and fix your artwork. You will be able to revise your digital proof before sending it to production.

Make your artwork print-ready

3 Finishing

If you choose for and exclusive finishing, **you will need to submit 2 files**. One containing your artwork (single or double sided) and another one with just the elements of your design where the exclusive finishing will be applied. **Please use 100% black colour for the finishing.**

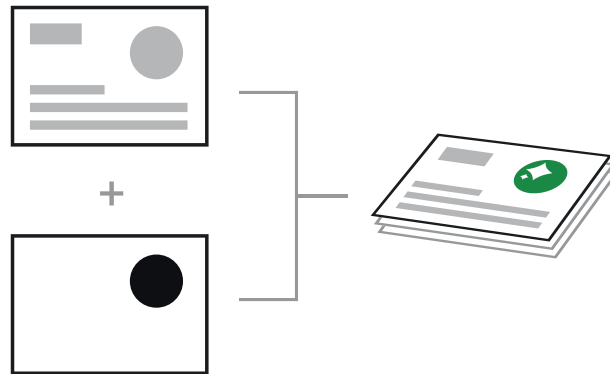

4 Extra checks

There are some checks to take into consideration before exporting your artwork:

- Same colour on different **types of paper** gives a different end result.
- All fonts and objects must be embedded.
- Check your layers for **overprint**.



If you choose a **PMS Card**, your design must be created as a **vector file**. In case you don't have a vector file, we will convert it to vector if the quality is good enough.

We might need to make a conversion to the right Pantone Library, please note that this conversion might cause a slight colour deviation.

5 Export to PDF

Export your artwork to PDF format and make sure your document **colour mode** is CMYK.

Want to know more?

Visit our **helpcenter** or **contact** our experts for personal advice.

In case not all specs are matched, we will always manually process, adapt and fix your artwork. You will be able to revise your digital proof before sending it to production.