


BOSS THERM

BCT CYLINDER THERMOSTAT

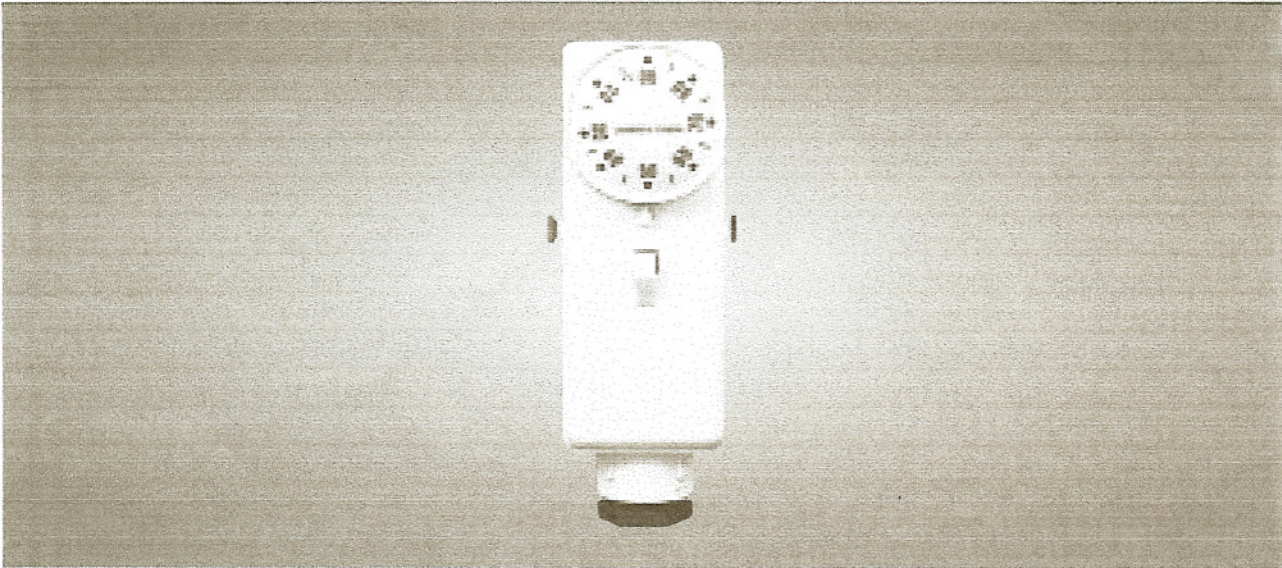

BCT Cylinder Thermostat


- Cylinder thermostat/pipe thermostat.
- 15A contacts.
- Cable clamp holds cable secure to prevent pulling the cable out.
- Strap-fixing ensures good contact even with pre-lagged cylinders.
- Bi-metallic.
- 15°C to 90°C.
- Up to 42mm pipe

Technical Data

Voltage:	250V
Frequency:	50Hz
Switching System:	Bi-metallic spring operating changeover contacts
Contacts:	Ag 1000/1000
Contact rating:	15A resistive 2.5A inductive
Operating range:	15° - 90°
Temperature differential:	+5° - +10°C adjustable (factory set at +6°C)
Rate of change:	1K/min
Protection:	IP40

Ordering Specification

BCT Cylinder Thermostat

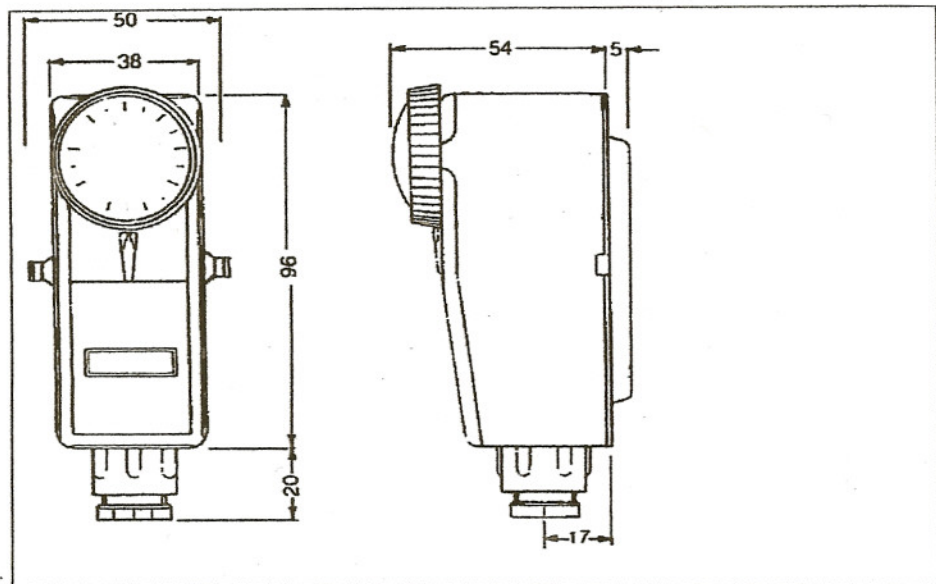

Wiring Diagram BCT



15A (2.5) 250V 2 - Break on rise 3 - Make on rise