


2CV Production Models

1955
2CV A - AU - AZ - AZU

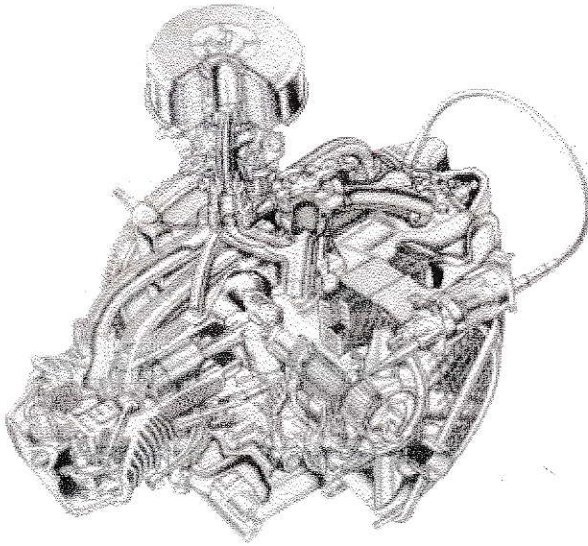

ENGINE

Launch of the 425 cc engine in the Berline AZ and Fourgonette AZU

Bore 66 mm Stroke 62 mm

Capacity 425 cc

Fiscal horsepower 2 CV


Compression ratio 6.2 : 1

12 bhp SAE @ 3 500 rpm 2.2

m.kg torque @ 2 000 rpm

Solex 26 BCI carburettor

6 blade cooling fan

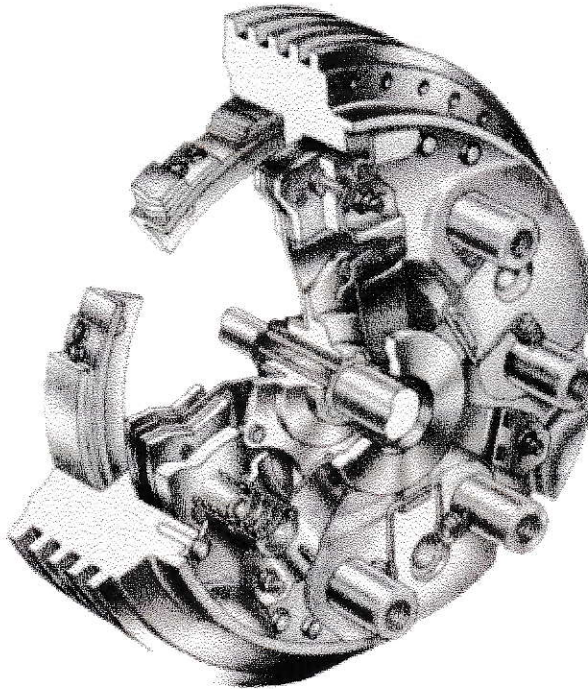

TRANSMISSION

AZ Berline is fitted with a centrifugal Trafficclutch which disengages when the engine is idling thereby permitting one foot driving in traffic.


BODYWORK

Direction indicators fitted to C panel

Twin rear lamps incorporating a single stop lamp

New grille badge fitted incorporating chevrons not surrounded by an oval

Rubber bung fitted to front doors to permit window to be locked in fully open position

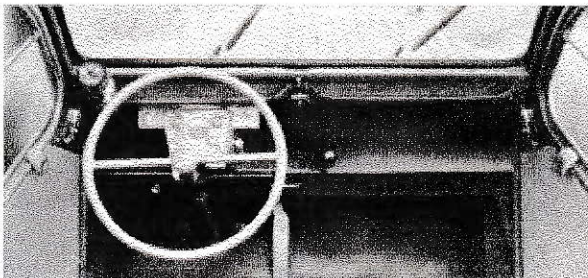

INTERIOR

Light grey steering wheel

Illuminated instrument panel

Tartan upholstery

The AZU Fourgonette was mechanically similar to the AZ Berline although the Trafficclutch was not fitted

[Next](#)

[Back](#)

[Prototypes](#)

[Home](#)

8:3 They fix front arm washer + strapping -

~~8-9-00~~ - clean carb. Check valve adj. Valve were at

20th -- set AT 6th - waiting for Formator

on correct valve adj.

Aug. Battery - install New Brake hoses +

Mounting cylinder - New speed cable -

Drive + check out all components

3-20-01

