


BATAIMANT NV

TIGES ET ACCESSOIRES DE COFFRAGE BLOCS MAGNETIQUES

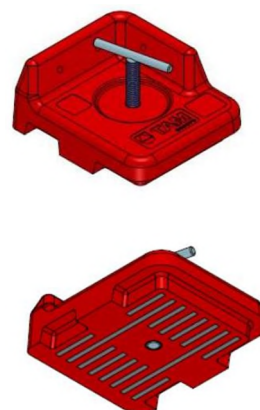


Updated on 27/03/2024

Description

Rectangular magnet block in polyurethane elastomer resin with magnetizing system, for magnetic attachment to metal formwork panels.
Disassembly with M12 T-wrench supplied.
For securing metal mannequins in formwork panels.
For positioning formwork elements (traps, etc.).
Can be reused several times.

Dimensions and characteristics

- Shore hardness of resin: 95 ShA
- Dimensions LxWxH (mm): 165x140x35 mm heel 65 mm
- 3 x M6 mm holes in heel for mounting

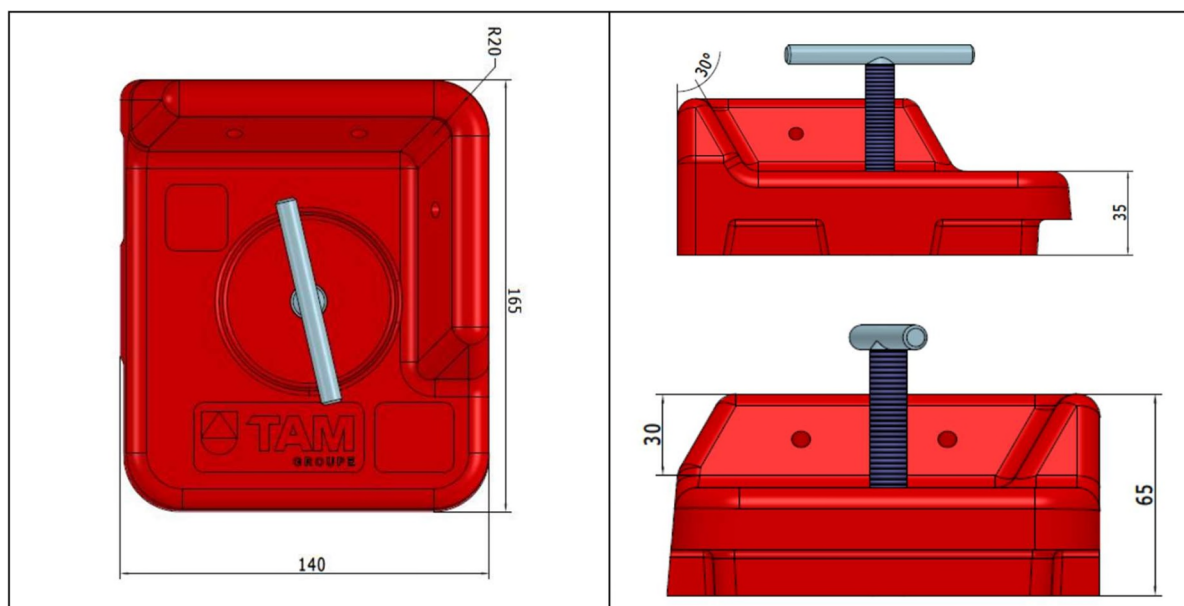

Packaging

Code	Designation	Dimensions LgxLxH (mm)	Packaging	Unit weight (kg)
907183	BATAIMANT NV	165x140x65-35	1 p	1,8

Scope of application

- Building: holding negatives between two vertical metal forms (walls) Door and window dummies
- Formwork edges
- Engravings: resting beams, floors, etc
- Prefabrication: holding casting stop blocks

Installation

- Must be applied to clean, flat surfaces
- Place the magnet in the chosen position:
- Against the formwork element to be held
- Fastened by nailing or screwing: fastening should be slightly floating
- Formwork edges

Security

- Lifting with this product is prohibited.
- Special regulations for air transport of magnetic products: please consult us.

The information provided in this document is for guidance only and reflects our current knowledge. We shall not be responsible or liable for any improper or inappropriate use of our products.

Given the wide range of possible uses, our recommendations do not exempt users from carrying out their own tests. Our laboratory and technical department will be happy to provide you with any information you may require.

TAM Groupe Z.I. Avenue Albert Einstein.
CS 90043 - 77555 Moissy Cramayel Cedex - France
S.A.S. au capital de 883 332 € RCS Melun B
SIRET 313 659 674 00029 - FR 76 313 659 674

Tel.: + 33 1 64 13 30 00 – tamgroupe@tamgroupe.fr – www.tamgroupe.fr