

SHEAR CONE M 39

CONES FOR CLIMBING FORMWORK



Updated on 29/11/2024


Description and application

- Steel cone for positioning and shear load 30.88.39 / 40.88.39
- To be used with a Hex, screw or an adapter.
- Screw out using special tool 39.19 ref 100325 + wrench 19 ref 100205



Dimensions

Bar Ø		Ø23	Ø30
Designation		30.88.39	40.88.39
Article n°		100294	100317
Thread F	Mm	M39x4	M39x4
Lf	M	73	72
L	M	150	155
L1	M	85	85
Ø D	Mm	88	88
Weight	G	3500	3450
Working load	kN	172	290
Breaking load	kN	345	580

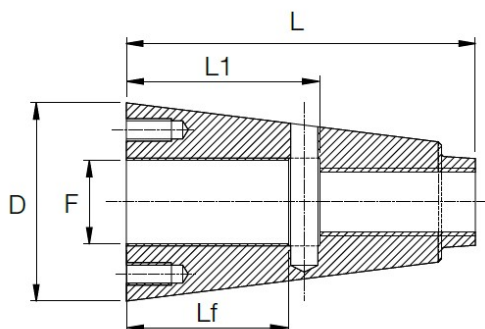

The information provided in this document is for guidance only and reflects our current knowledge. We shall not be responsible or liable for any improper or inappropriate use of our products.

Given the wide range of possible uses, our recommendations do not exempt users from carrying out their own tests. Our laboratory and technical department will be happy to provide you with any information you may require.

TAM Groupe Z.I. Avenue Albert Einstein.
CS 90043 - 77555 Moissy Cramayel Cedex - France
S.A.S. au capital de 883 332 € RCS Melun B
SIRET 313 659 674 00029 - FR 76 313 659 674

Tel. : + 33 1 64 13 30 00 – tamgroupe@tamgroupe.fr – www.tamgroupe.fr