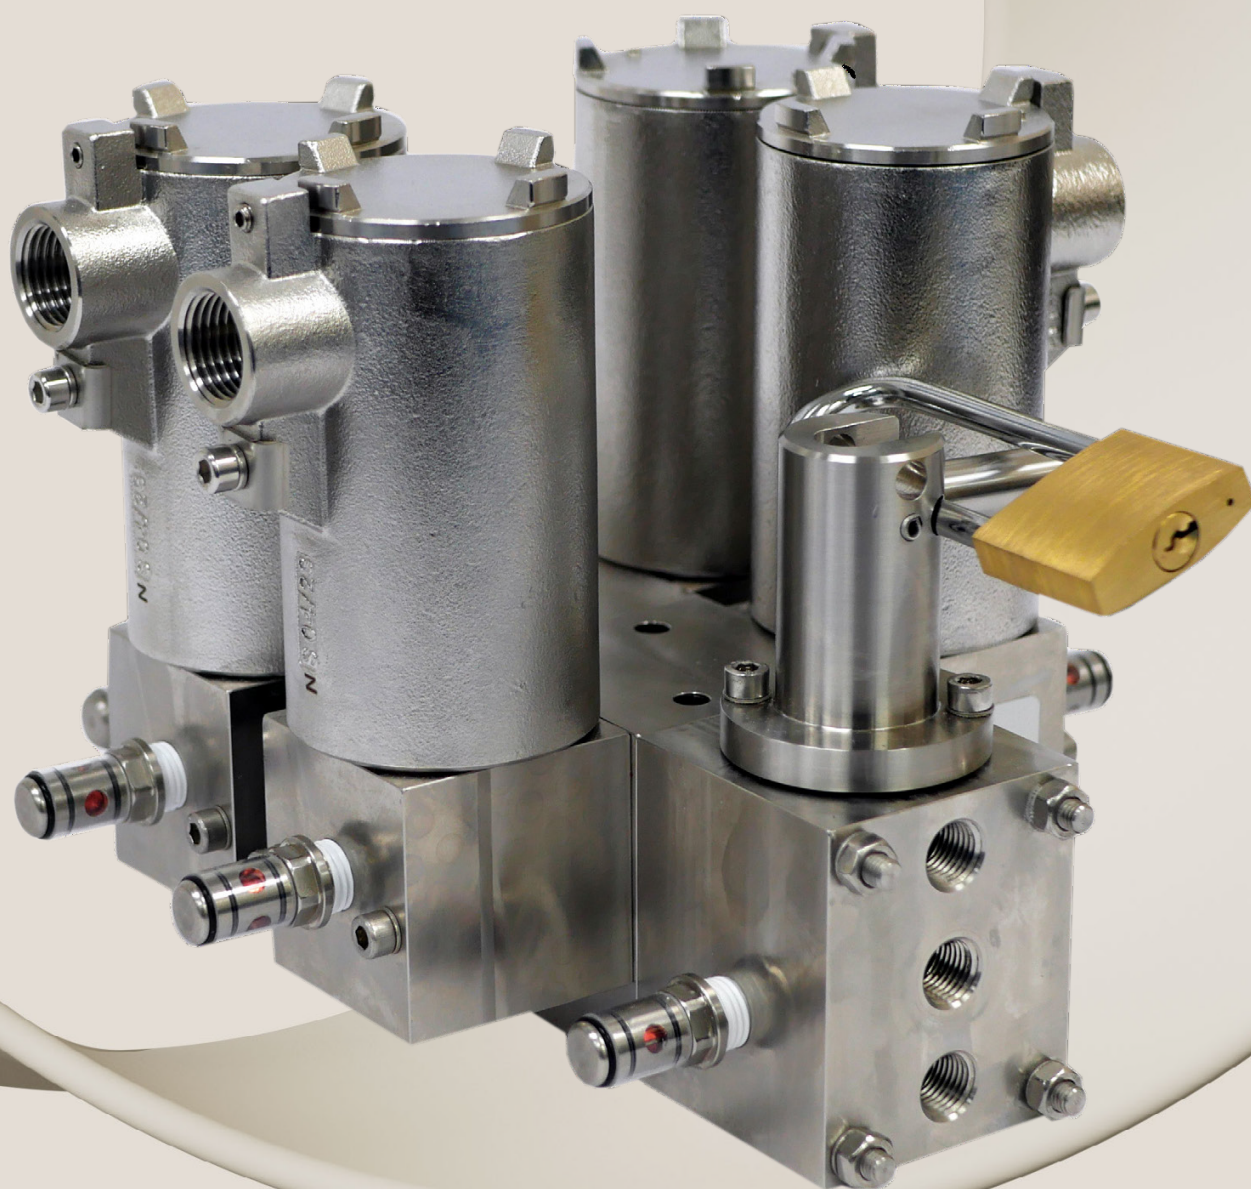




Process
Automation

Our product brands:
IMI MAXSEAL®
IMI Herion

Redundant Valve Manifolds (RVM) for Reliability and Safety



Breakthrough
engineering for
a better world



IMI Critical Engineering's family of specialist companies design, manufacture and service custom-designed valves, actuators, and high integrity solenoid valves that precisely control the flow of steam, gas and liquids under extremes of pressure and temperature, as well as intensely abrasive or corrosive operating conditions. Oil, Gas and Chemical Brands:

IMI MAXSEAL®

Stainless steel high integrity solenoid valves.

IMI ORTON

Triple offset metal seated butterfly valves

IMI NORGREN

Proportional valves and regulators.

IMI STI

Pneumatic and hydraulic actuation.

IMI Truflo Rona

Critical application ball valves.

IMI HERION

Pneumatic and hydraulic SOVs for downstream applications.

IMI CCI

Control, HIPPS, and on/off valves.

IMI Thomson Valves™

High integrity valves and regulators

IMI BUSCHJOST

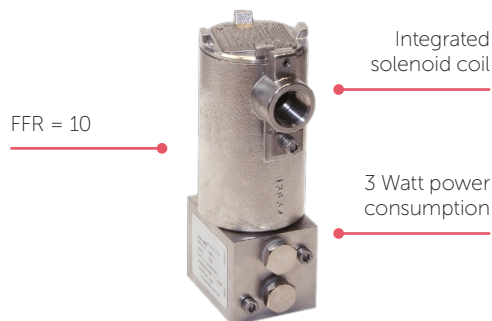
SOVs, angle seat valves, and motorised valves



Upstream Solutions

Maxseal has over 70 years' experience in providing oil, gas and chemical solutions with proven safety, reliability, and durability in the most extreme environmental and operating conditions around the globe.

- Global certifications including SIL, ATEX, IECEx, CSA, CCOE, FM & Inmetro
- Suitable for SIL / Safety Instrumented Systems
- Reliable & resilient in hazardous environments
- Low power options
- Pneumatic & hydraulic options



Production



LNG

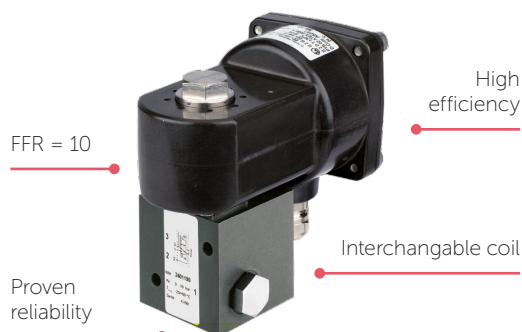


FPSO

Downstream Solutions

Safe and reliable operation in chemical and petrochemical applications is increasingly vital to plant operations. Our extensive range of high performance products includes the world-leading Herion pilot and control valves, created specifically for the chemical and process industries.

- Global certifications including SIL, ATEX, IECEx, CSA, CCOE, FM, Inmetro & ITRI
- High functionality
- Energy saving modular solenoid systems
- Compact design
- Resilient in hazardous environments



Refining



Chemical

Redundant Valve Manifold (RVM) Systems

Redundant systems are required to increase uptime by ensuring the process continues to run in the event of a valve failure; or to increase safety by ensuring the process can be shut down in the event of a failure - or both.

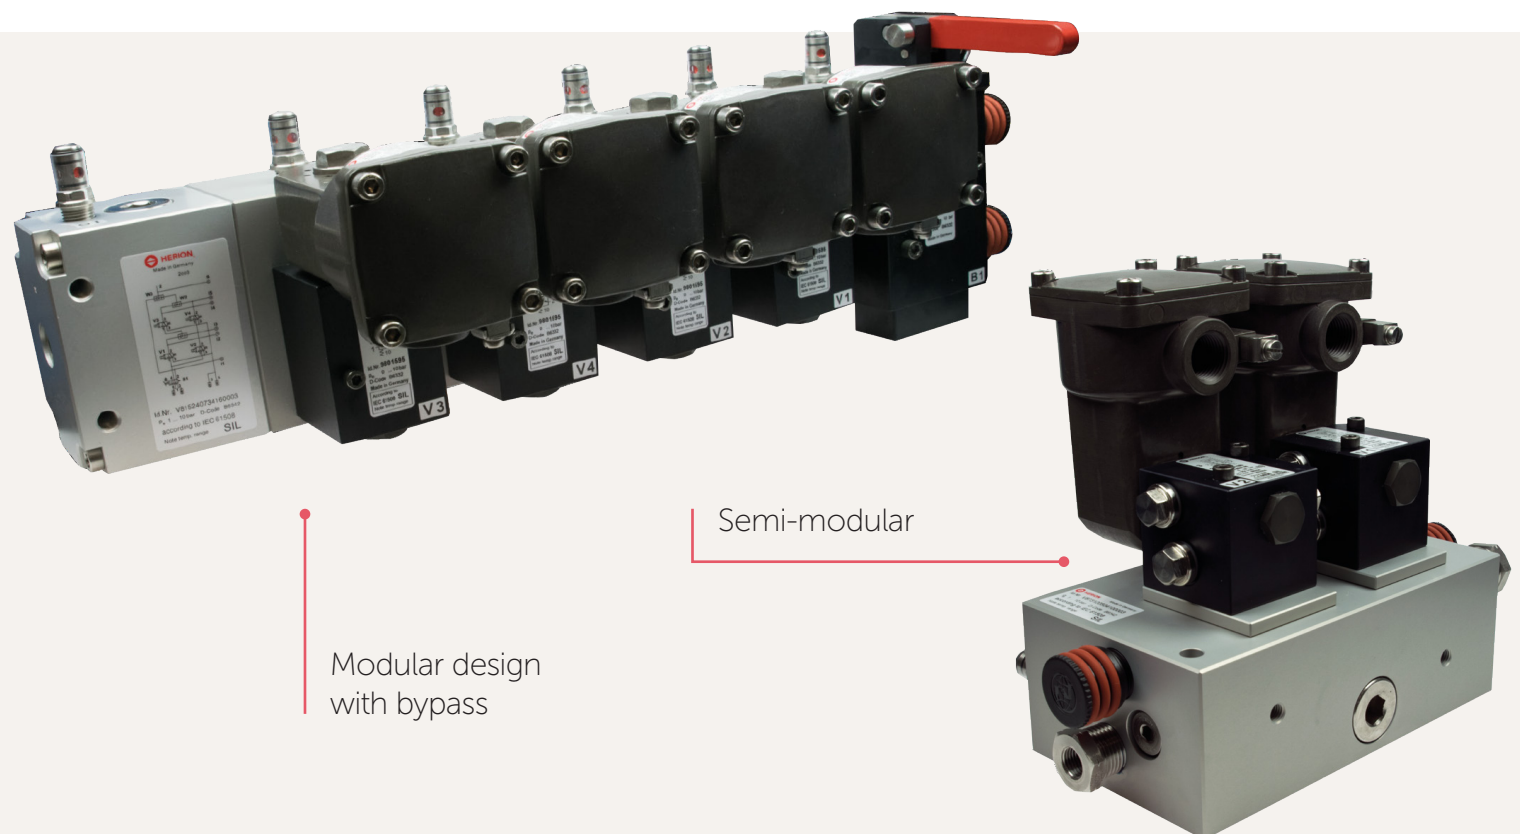
The Issues with Existing Solutions

Assemblies of individually piped components (with back plate or tie-rod mounting) have several inherent limitations:

- The complete systems are not SIL certified
- Difficult to service and maintain
- Incorrect configuration can be dangerous
- Number of potential leaks
- No failure indication for valves and outputs

The RVM system solves these problems. Combining safety and availability in a single convenient package. Our RVM system offers simpler installation, helps eliminate unplanned shutdowns and is available in either aluminium or stainless steel to suit both upstream and downstream applications.

- System replaces components, panels and pipe work
- Available in aluminium or stainless steel construction
- Utilising industry proven products and technology



Modular design
with bypass

Semi-modular

Compact Design

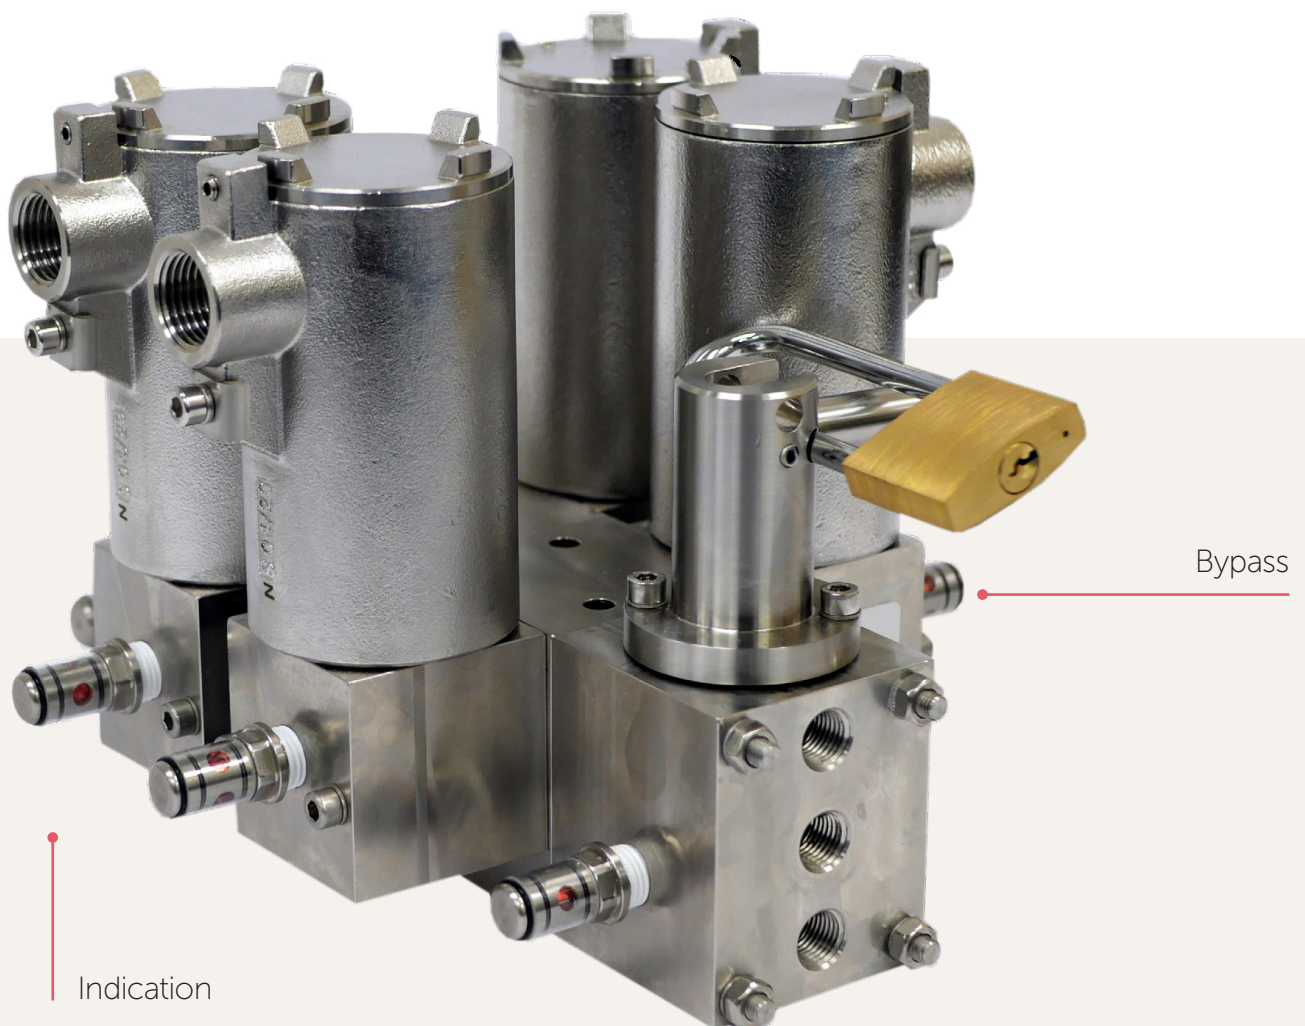
Redundancy (HFT=1) is mandated to achieve SIL3 and is often considered when the consequences of a safe failure (spurious trip) are significant. The industry leading reliability of IMI solenoid valves is such that often, no additional status indication or system bypass is required.

Semi-Modular Design

A downside of redundant valve configurations is that it may not be immediately apparent that a solenoid has failed, because the "other" solenoid continues to provide the required functionality. Our Semi-Modular design adds pressure indicators to show the valve position status and aid proof testing or fault finding. Optional valve position sensors and electronic pressure switches enable remote monitoring if required.

Modular Design

To facilitate in-service proof testing our modular design allows the RVM to be temporarily bypassed, so that solenoid valves can be cycled without interrupting the process. In the unlikely event that a valve were to fail, the bypass also allows the manifold-mounted valves to be exchanged in the field, without interrupting the process or disturbing the pipework.



RVM Systems for Chemical and Petrochemical Applications

The natural choice for Safety Instrumented Systems in downstream applications, the Herion 2401x or 980xx series solenoid valves have been successfully used in the Chemical and Petrochemical industries for over 40 years, gaining a reputation for reliability and safety. Available in aluminium or stainless steel, key features include an interchangeable coil system and optional valve position feedback sensors.

Benefits

Compact or Modular Manifold Designs	Interchangeable solenoid coils
Reduced Potential Leak Paths	Integrated filter to protect against particle ingress
Modular Construction Enabling Standard and Customised Solutions	Fast, simple removal of individual components
Bypass Function for Online Valve Replacement	Up to 12 years SIL maintenance service intervals 12 year 24011 series, 6+2 year 24010 series, 6+2 year 980xx series
Large Reduction in Installation Time	Cable terminations inside coil housing negating the need for additional ex certified termination enclosures
Standard and High Flow Options	Integrated exhaust guards preventing moisture ingress

Specifications

Aluminium, or Stainless Steel Construction	IEC 61508 SIL based on reliability data
Din En 161/3394 Dvgw Type Examination; Automatic Shut Off / Control Valves	1oo2, 2oo2 and 2oo3 options providing "safety", "availability" or "safety & availability" functionality
Inductive Proximity Sensing of Valve Poppet Position	1/4 and 1/2 porting options
Temp. Range: 24011: -40°C to +110°C (-40°F to +230°F) (Depending on Sealing Material) Temp. Range: 24010: -25°C to +80°C (-13°F to +176°F)	Reliable direct acting poppet valve operating from 0 to 10 bar (0 to 145 PSI)
Temp. Range: 980xx: -40°C to +60°C (-40°F to +140°F) SIL Version: -25°C to +60°C (-13°F to 140°F)	10 times factor of safety, on solenoid de-energising return force

Approvals

IECEx, INMETRO, FM, CSA, NEPSI, TR-CU, CCOE & SIL



V81 - Modular RVM with bypass



V87 - Semi-modular RVM without bypass



V82 - Compact RVM

RVM Systems for Oil and Gas Applications

Maxseal ICO3 series solenoid valves have proved their reliability and durability in upstream applications for over 25 years. Featuring a very high (4.7 Kg) valve return spring and a unique, thermally efficient coil housing manufactured in stainless steel.

Benefits


Compact or Modular Manifold Designs	Coil thermally and magnetically engineered for performance
Integrated Filter to Protect Against Particle Ingress	Standard and high flow options
Reduced Potential Leak Paths	Large reduction in installation time
Modular Construction Enabling Standard and Customisable Solutions	Fast, simple removal of individual components
Bypass Function for Online Valve Replacement	Cable terminations inside coil housing negating the need for additional ex certified termination enclosures
Integrated Exhaust Guards Preventing Moisture Ingress	Up to 10 years maintenance service intervals (6 years to maintain SIL)

Specifications


All 316L Stainless Steel Construction	1002, 2002 and 2003 options providing "safety", "availability" or "safety & availability" functionality
4.7 Kg (10 Times Factor of Safety) Return Spring (4 Kg Exia Solenoid)	Temp. Range: -55°C to +90°C (-67°F to 194°F), bypass valve -40°C to +80°C (-40°F to +176°F)
1/4 and 1/2 Porting Options	Reliable direct acting valve operating from 0 to 12 bar (0 to 174 PSI), bypass valve 0 to 10 bar (0 to 145 PSI)

Approvals

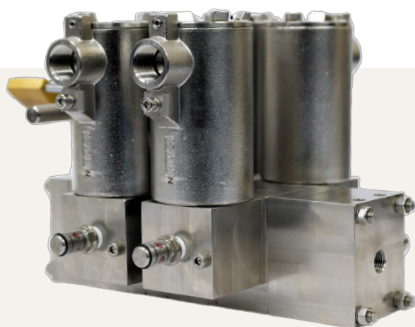IECEX, INMETRO, FM, CSA, NEPSI, TR-CU, CCOE & SIL












2003 - Modular RVM with Bypass

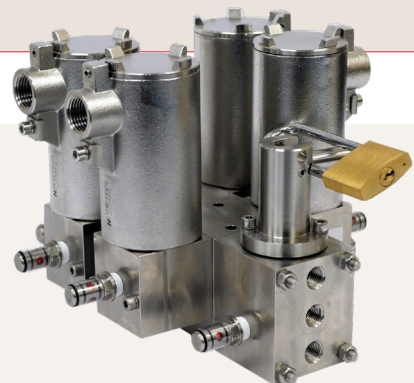

Functionality Options

The RVM System is available in three functionality options, the selection of which will be dependent on the Safety Instrumented Function (SIF) that it is to be used within. 1oo2, 2oo2 double channel and uniquely 2oo3 triple channel systems are available.


<p>Compact 1oo2</p> 	<p>Semi modular 1oo2</p> 	<p>Modular 1oo2 (with bypass)</p> 	<p>1oo2 "Safety" Double channel redundant system Redundancy for the process valve closure. Any one out of two solenoid valves needs to de-energise to ensure safety.</p>
<p>Compact 2oo2</p> 	<p>Semi modular 2oo2</p> 	<p>Modular 2oo2 (with bypass)</p> 	<p>2oo2 "Availability" Double channel redundant system Redundancy for the process valve to remain open. Any one out of two solenoid valves needs to remain energised to ensure availability.</p>
<p>Compact 2oo3</p> 	<p>Semi modular 2oo3</p> 	<p>Modular 2oo3 (with bypass)</p> 	<p>2oo3 "Safety and Availability" Triple channel redundant system Any two channels out of three need to operate to provide safety (process valve closure) and availability (process valve remain open). The RVM system combines the strength of "1oo2" and "2oo2" thus increasing both safety and availability functions.</p>

Hydraulic 2oo3 Fail Safe Trip System for Gas and Steam Turbines Hydraulic

The Herion Hydraulic 2oo3 system provides safety and availability for main shut off emergency process valves with hydraulic actuators.

Using three identical solenoid valves to create a flexible 2oo3 voting logic for unequalled failure tolerance, the system uses redundant cartridges which allow high flow rate and a quick response time.

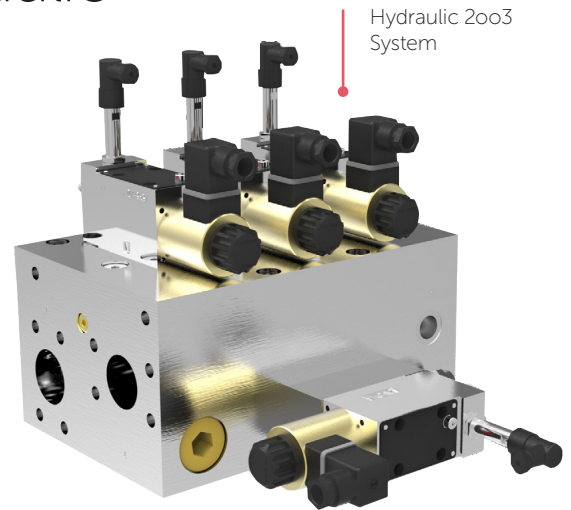- Available for low and high operational pressure 5 – 320 bar
- Different sizes provide high flow availability 200 – 4000 l/min
- Cartridges sizes DN 16; 25; 32; 40; 50 and 63
- Fast reaction time
- Safety Control – direct monitoring of solenoid valves position (proximity switches)
- SIL 3 approval
- IP 65
- Certification to ATEX,
- Redundant cartridges
- Partial Stroke Testing Option
- Maintaining Safety 2oo3 during operation (redundant 2oo3 system)
- Prepared outlets for pressure transducers



Process Automation

The information in this brochure is provided for general informational purposes only. Specifications for products and services are subject to change without prior notice. IMI plc and its subsidiaries own all product brands mentioned herein.

IMI makes no warranties or representations about the accuracy or completeness of the content in this brochure and assumes no liability for any errors or omissions it may contain. We reserve the right to modify, enhance, or discontinue any product or service described herein without prior notification.

IMI Thompson Valves

17 Balena Close,
Creekmoor, Poole
BH17 7EF
United Kingdom

www.imiplc.com/process-automation
14010.02/24en

