

SanMix 40

Formerly SupaMix 40 · Corebrew 40

Beverage gas for draught beer dispense, including stouts and ales

GAS SPECIFICATION

COMPONENT	FORMULA	UNIT	RESULT
Carbon dioxide	CO ₂	%	40 ± 4%
Nitrogen	N ₂	%	Balance

PACKAGE SPECIFICATION

Valve type (AS 2473.2)	Type 30
Cylinder colour (AS 4484)	Green grey dome and shoulder, pewter body

Refer to AS 4484 for cylinder colour identification.

QUALITY STANDARDS & CONFORMANCE

Food	CO ₂ to ISBT beverage grade; N ₂ food grade
Food safety	FSSC 22000 · Codex HACCP
Quality	ISO 9001 certified quality management system

DANGEROUS GOODS

COMPRESSED GAS, N.O.S. (contains carbon dioxide)

UN NO.
UN 1956

DG CLASS
Class 2.2



SPECIFICATIONS

CYL SIZE	NS	SG	VOLUME (M ³)	PRESS. ¹ (BAR)	GROSS WT ³ (KG)	DIMENSIONS ⁴ (MM)
D	246114	10062	1.7	143	17	600(H) 185(Ø)
F	246151	10063	6.2	150	39	1235(H) 205(Ø)
Bulk	Contact us for information on bulk options.					

Part numbers: NS — Coregas (Nippon Sanso Holdings Australia); SG — Supagas.

PRODUCT RANGE

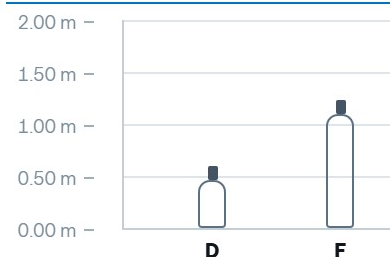


Chart is a visual representation only. Please use as a guide.

CERTIFICATES OF CONFORMANCE

Certificate of conformance available.

Always refer to the safety data sheet before use. SDS #0067

SCAN FOR
THE SDS



This information is a guide only. Some sizes may not be available in all areas; other sizes may be available on request. ¹ At 15°C; cylinder pressure varies with ambient temperature. ² Valve type and outlet designation to AS 2473.2. ³ Weights are nominal and vary with manufacturing tolerance. ⁴ Height includes valve. Contents based at atmospheric pressure at 15°C.