



## BACK-UP ALARMS



### 500 SERIES

ECCO's most compact and popular line of back-up alarms, the 500 Series provides a cost-effective warning solution with ECCO quality and reliability. A glass-filled nylon housing with epoxy-encapsulated electronics provide exceptional durability and protection against moisture, dust and vibration. ECCO's 500 Series SmartAlarm® measures ambient noise and adjusts sound levels, creating a volume that is safe without being annoying or contributing to noise pollution. Smart Alarms eliminate the need for constant manual adjustment and help prevent intentional alarm disconnection.


#### Models

PART NO.	TYPE	VOLTAGE	dB(A)	AMPS	APPROVALS
SA950	Smart	12-24	82-102	0.4	CE, R10, UL, IP65
SA951	Smart	12-48	77-97	0.2	CE, R10, UL
505	SRC*	12-24	87	0.1	SAE Type D, CE, R10, UL, AMECA, IP65
510	SRC*	12	97	0.2	SAE Type C, CE, R10, UL, AMECA, IP65
520	SRC*	12-24	97	0.2	SAE Type C, CE, R10, UL, AMECA, IP65
530	SRC*	12-24	102	1.0	SAE Type F, CE, R10, UL, IP65
575	SRC*	12-24	107	0.9	SAE Type B CE, R10, UL
585	SRC*	12-48	97	0.1	SAE Type C, CE, R10, UL, AMECA

\*SRC – Self Resonating Circuitry

#### Features and Benefits

- Compact size and universal mounting bracket maximizes location options
- Self grounding (except 575)
- Sealed in epoxy for protection against dust, moisture, and vibration
- Temperature Range: -40°F to +185°F (-40°C to +85°C)

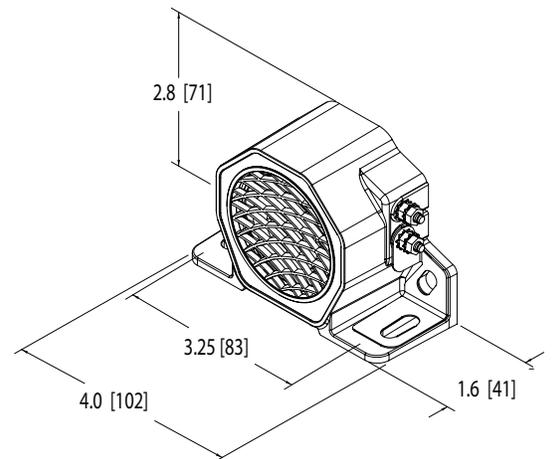

#### Alarm Specifications

- Connection: 8-32 uni stud connection
- Fiberglass reinforced nylon housing
- Recommended mounting bolt: 1/4" Grade 5
- Recommended washer: 1/4" Type A, Series N or W
- Recommended mounting torque: 76 in. lbs.