



# LIGHTBARS

SAE CLASS  
**I**

CALIFORNIA  
TITLE 13

**R65**

**R10**

**R6**

**R7**

Excludes 39" & 48"      Excludes 39" & 48"

## 14 SERIES Axios® SAE Class I Modular LED Lightbar

The revolutionary Axios® modular LED lightbar system takes safety and on-the-job performance to a new level. Choose from seven high-performance LED lighting options with exclusive DropLock™ technology that feature simple twist-lock placement virtually anywhere in the bar. The Axios system enables you to design, build, and deploy the ultimate warning light solution. No-tools convenience makes building, reconfiguring, or upgrading your lightbar fast and easy.

### Features

- Modules easily installed via DropLock™ power rails
- Supplied with in-cab controller
- 29 flash patterns
- Five color options - Amber, Blue, Clear, Green and Red
- Five length options - 39", 48", 54", 60" and 72"
- Seven standard chassis configurations
- Customizable configuration available, easy to upgrade
- Aluminum chassis, polycarbonate base and lens
- Range of strap mounting accessory kits
- Height: 3", width: 10.5"
- Temperature Range: -22°F to +122°F (-30°C to +50°C)



To view the Axios® product video or for more information visit [axiosmodular.com](http://axiosmodular.com)

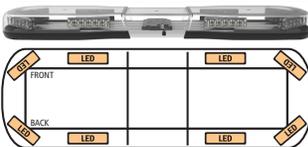
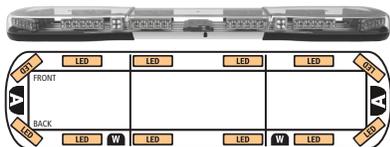
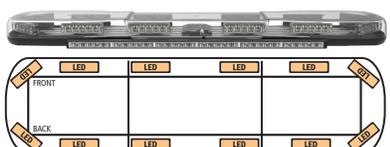
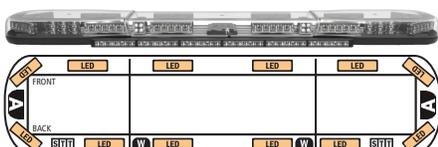
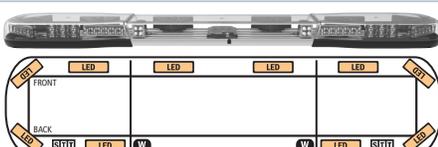
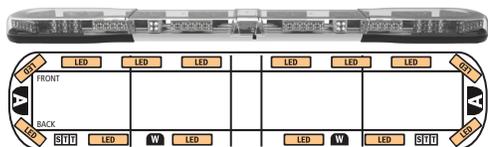
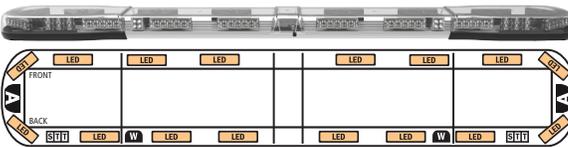
### Accessories

Seven LED modules available:

- Directional                      EZ1401A
- Beacon                            EZ1402A
- Alley Light                        EZ1403AL
- Worklamp                         EZ1403WL
- Stop-Tail-Turn                 EZ1404R
- Safety Director                 EZ1414
- Center Illumination            EZ1411

#	FLASH PATTERN	DESCRIPTION	#	FLASH PATTERN	DESCRIPTION
1	Steady Burn	Always On	16	Reg 65 Burst Side-to-Side	120 Burst FPM Alternating Side to Side
2	Double Flash (CA Title 13)	75 Double FPM	17	Quad Alternate Side-to-Side	75 Quad FPM Alternating Side to Side
3	Slow Quad (CA Title 13)	65 Quad FPM	18	Quad Cross Alternate	75 Quad Cross Alternating Side to Side
4	Slow Double (CA Title 13)	65 Double FPM	19	Double Alternate Side-to-Side	75 Double FPM Alternating Side to Side
5	Quint Hold (CA Title 13)	75 Quint FPM	20	Double Cross Alternate	75 Double Cross Alternating Side to Side
6	Pulse8	75 Oct FPM	21	Quint Alternate Side-to-Side	75 Quint FPM Alternating Side to Side
7	Reg 65 Single Flash	120 Single FPM	22	Quint Cross Alternate	75 Quint Cross Alternating Side to Side
8	Reg 65 Double Flash	120 Double FPM	23	Quad Alternate Side-to-Side (Front)	75 Quad FPM Alternating Side to Side (Front only)
9	Reg 65 Triple Flash	120 Triple FPM	24	Quad Alternate Side-to-Side (Rear)	75 Quad FPM Alternating Side to Side (Rear only)
10	Reg 65 Quad Flash	120 Quad FPM	25	Double Alternate Side-to-Side (Front)	75 Double FPM Alternating Side to Side (Front only)
11	Reg 65 Burst	120 Burst FPM	26	Double Alternate Side-to-Side (Rear)	75 Double FPM Alternating Side to Side (Rear only)
12	Reg 65 Single Side-to-Side	120 Single FPM Alternating Side to Side	27	Quint Alternate Side-to-Side (Front)	75 Quint FPM Alternating Side to Side (Front only)
13	Reg 65 Double Side-to-Side	120 Double FPM Alternating Side to Side	28	Quint Alternate Side-to-Side (Rear)	75 Quint FPM Alternating Side to Side (Rear only)
14	Reg 65 Triple Side-to-Side	120 Triple FPM Alternating Side to Side	29	Cycle All	Cycle through patterns 2, 3, 5, 6, 13, 15, 16
15	Reg 65 Quad Side-to-Side	120 Quad FPM Alternating Side to Side			

WARNING LIGHTING | DIRECTIONAL LIGHTING | LIGHTBARS | WHITE LIGHTING | REVERSING SAFETY

39" / 0.99m	#	V	A	LEDs	WL	AL	STT	SAFETY DIRECTOR	⌚
	14-00005-E	12-24	7.2	8	-	-	-	-	5 years
48" / 1.22m	#	V	A	LEDs	WL	AL	STT	SAFETY DIRECTOR	⌚
	14-00001-E	12-24	14.4	12	2	2	-	-	5 years
	14-00006-E	12-24	13.3	12	-	-	-	1	5 years
54" / 1.37m	#	V	A	LEDs	WL	AL	STT	SAFETY DIRECTOR	⌚
	14-00002-E	12-24	17.5	12	2	2	2	1	5 years
	14-00007-E	12-24	11.4	10	2	-	2	-	5 years
60" / 1.52m	#	V	A	LEDs	WL	AL	STT	SAFETY DIRECTOR	⌚
	14-00003-E	12-24	16.8	14	2	2	2	-	5 years
72" / 1.83m	#	V	A	LEDs	WL	AL	STT	SAFETY DIRECTOR	⌚
	14-00004-E	12-24	18.6	16	2	2	2	-	5 years

### Symbols / Features Guide

- LED** Wide-angle TIR optic LED warning modules
- STT** Stop/Tail/Turn lights: Pair of rear facing high-level auxiliary LED signal lights
- W** Worklamps: Pair of rear facing LED worklamps (white)
- A** Alley Lights: Pair of side facing LED alley lights (white)
-  Safety Director™