



3410CB
Included

SAFETY DIRECTOR™



ED3300 SERIES High-Intensity Warning

The ED3300 LED Safety Director™ is a high-intensity warning system designed to direct traffic approaching from the rear of a stationary vehicle. The light-stick design allows for unobtrusive interior or exterior mounting, either flush to the vehicle or using the provided mounting brackets. Inside the cab a modern, soft touch controller provides fingertip control of the ED3300's nine built-in flash patterns, features an LED display that mimics the selected pattern in real time and also includes an auxiliary switch. 20A auxiliary relay included.

Models

| PART NO. | CABLE LENGTH | ILLUMINATION |
|----------|--------------|--------------|
| ED3315A | 15' 4.6m | ■ |
| ED3335A | 35' 9.1m | ■ |
| ED3355A | 55' 16.8m | ■ |

Design Features


- 12-24 VDC, 1.6 Amps
- Extruded aluminum housing with polycarbonate lens
- Eight reflective modules with 20 LEDs
- Includes signal bar, controller, cable and 20A auxiliary relay
- Temperature Range: -22°F to +122°F (-30°C to +50°C)

System Components

- Controller: 3410CB
- Signal bar: ED3300LBA
- Cable: 15' (3410-15)
35' (3410-35)
55' (3410-55)

Replacement Parts

- Amber Module: ER3300A
- Blue Module: ER3300B
- Clear Module: ER3300C
- Red Module: ER3300R

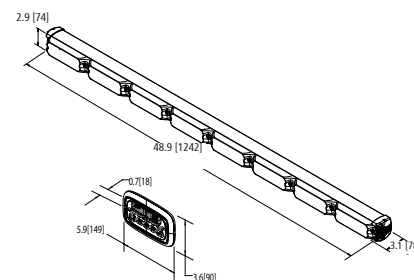

Flash Patterns

| | |
|----------------|--------------------------------|
| LEFT (L) | LEFT SOLID (LS) |
| CENTER OUT (C) | CENTER OUT SOLID (CS) |
| RIGHT (R) | RIGHT SOLID (RS) |
| WIG WAG (WW) | ALTERNATING QUAD FLASH (AQF) |
| | ALTERNATING SINGLE FLASH (ASF) |