



MINIBARS
















































excluding
split

permanent
mount
only

5590 Reflex® SAE Class I LED, 15"

The 5590 Series LED minibar features an innovative design combining Reflective and TIR Optic LED modules. The TIR Optic modules produce a highly intense, focused and long distance beam to the front and rear of the vehicle while the Reflective modules ensure optimum 360° coverage by producing a dispersed, wide-angle beam to the sides and corners. 5590 permanent mount models can be synchronized to operate multiple lights alternately or simultaneously.


Models

| PART NO. | MOUNT | LENS COLOR | LED COLOR OPTIONS |
|------------|--------------------|---|---|
| 5590A | 4 Bolt |  |  |
| 5590CX | 4 Bolt |  |      |
| 5590CXX | 4 Bolt |  |       |
| 5590A-VM | Vacuum-Magnet |  |  |
| 5590CX-VM | Vacuum-Magnet |  |      |
| 5590CXX-VM | Vacuum-Magnet |  |       |
| 5590A-MG | Magnet |  |  |
| 5590CA-MG | Magnet |  |  |
| 5590CAC-MG | Magnet |  |   |
| 5590A-HBT | Semi-Permanent HBT |  |  |
| 5590CX-HBT | Semi-Permanent HBT |  |      |

Replace "X" in part number with desired color: A=amber, B=blue, C=clear, G=green, R=red

Features and Benefits

- 12-24 VDC, 6.0 Amps
- Combines Reflective and TIR Optic LED modules to optimize focused front/rear warning and wide-angle side warning
- Choice of 18 flash patterns
- Cigarette plug with on/off and flash pattern selection switch (vacuum-magnet & magnet only)
- Temperature Range: -22°F to +122°F (-30°C to +50°C)

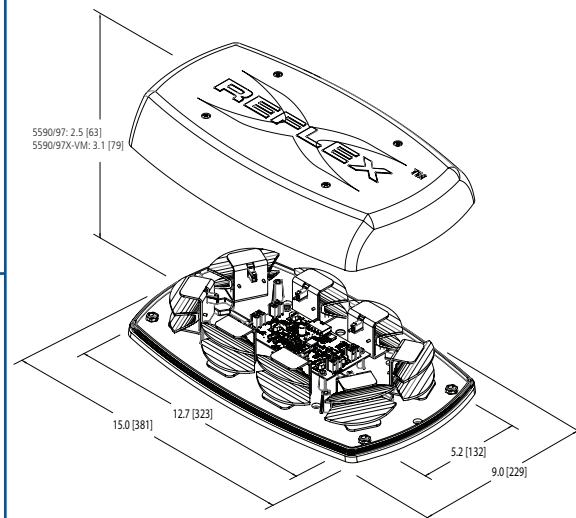

Flash Patterns

- Quad flash
- Double flash
- Fast double
- Slow quad
- Slow double
- Quint-hold
- Burst
- Quad, alternate
- Quad, diagonal
- Double, alternate
- Double, diagonal
- Quint-hold, alternate
- Quint-hold, diagonal
- Fast rotate
- Rotate / quad
- Wave rotate
- Random
- Steady on

Replacement Parts

- Domes: Amber - R5590LA
Clear - R5590LC

To view a Reflex® Family product video, visit [YouTube.com/ECCOSafety](https://www.youtube.com/ECCOSafety)