



## BACK-UP ALARMS

### 600 SERIES Surface Mount


Designed to meet all the harsh operational requirements of any fleets equipment, ECCO 600 Series alarms feature a reverse-mounted speaker design and reinforced nylon housing providing unrivaled durability. These alarms are so robust that an ECCOLIFE™ warranty covering the alarm for the life of the vehicle is offered on all models. Smart Alarm® models measure ambient noise and adjust their sound level, creating a volume that is safe without being annoying or contributing to noise pollution. Smart Alarms eliminate the need for constant manual adjustment and help prevent intentional alarm disconnection. Ask your local representative for any supporting documents and certifications.

#### Models

PART NO.	TYPE	CERTIFICATIONS	VOLTAGE	dB(A)	AMPS
SA901N	Smart	CE, R10, UL, IP64	12-24	82-107	0.3
SA931N	Smart	SAE Type F, CE, R10, UL, IP64	12-48	82-102	0.2
610N	-	SAE Type C, CE, R10, UL, IP64, AMECA	12-36	97	0.4
630N	-	SAE Type B, CE, R10, UL, IP64, AMECA	12-36	107	1.2

#### Features and Benefits

- Reverse-mounted speaker enhances sound and protects the speaker from dust and moisture ingress
- Reinforced nylon housing eliminates corrosion damage
- Sealed in epoxy for protection against dust, moisture, and vibration
- Steam cleanable and pressure washable
- Works on positive or negative ground systems
- Temperature Range: -40°F to +185°F (-40°C to +85°C)

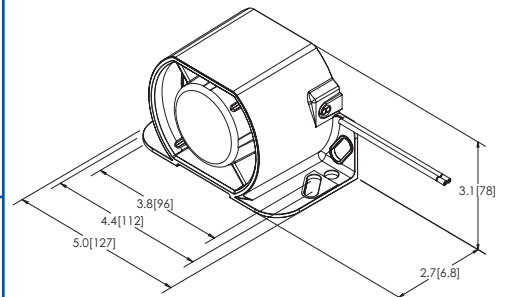

#### Alarm Specifications

Connection: 16 AWG blunt cut wires  
 Reinforced nylon housing  
 Recommended mounting bolt:  
 5/16-18 UNC Grade 5  
 Recommended washer:  
 5/16" Type A, Series N or W  
 Recommended mounting torque:  
 75 in. lbs.