



BEACONS



7960 Pulse™ SAE Class I LED

ECCO's 7960 Series LED beacons feature 16 of the latest high-intensity 3-watt LEDs, providing the brightest light output available in an LED beacon. Eleven flash patterns and hi/lo intensity control combine with a long maintenance-free service life and low-amp draw to make this beacon the perfect choice for any application. Easily replaces old rotating or strobe beacons with the latest technology, so no ongoing maintenance is required.


Models

PART NO.	VOLTAGE	AMPS	MOUNT
7960X	12-24	2.5	3 Bolt Flange/1" Pipe
7960CX	12-24	2.5	3 Bolt Flange/1" Pipe
7960X-VM	12-24	2.5	Vacuum Magnet
7960CX-VM	12-24	2.5	Vacuum Magnet

Replace X in part number with desired color: A = amber, B = blue, C = clear, R = red

Features and Benefits

- 16 3-watt LEDs provide unrivalled flash intensity
- 11 flash patterns with hi/lo intensity control
- Die-cast aluminum base is coated against corrosion and designed for vibration resistance and heat dissipation (permanent mount versions are epoxy filled)
- Thread-on polycarbonate lens
- Reverse polarity, voltage spike and surge protected
- Temperature Range: -22°F to +122°F (-30°C to +50°C)

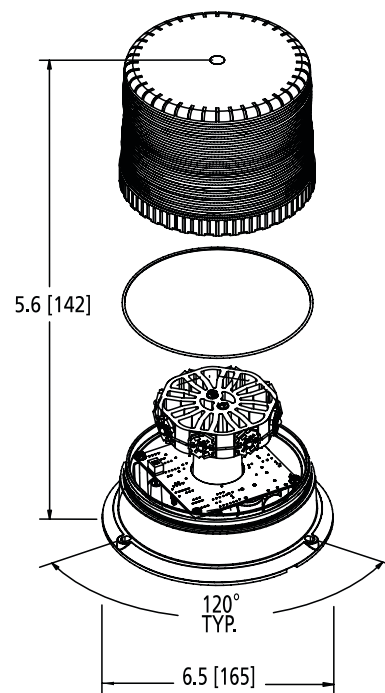

Parts & Accessories

- Lenses: Amber - R7960LA
Clear - R7960LC

T 800-635-5900 | orders@eccogroup.com