



## BACK-UP ALARMS



### 200 SERIES Surface Mount


ECCO's surface-mount alarm provides a low-profile warning alarm specifically designed to offer a wide range of mounting options, particularly where space is limited. The reinforced nylon housing provides rugged durability and the epoxy-encapsulated circuit board protects all elements from vibration and moisture. ECCO's unique grill design meets the requirements of SAE J994 for high-pressure washing.

#### Models

PART NO.	VOLTS	DECIBELS	AMPS
210	12	97	0.1

#### Design Features

- Designed for mounting in areas where a compact profile is required
- Universal mounting bracket covers a wide range of popular mounting applications
- Temperature Range: -40°F to +185°F (-40°C to +85°C)

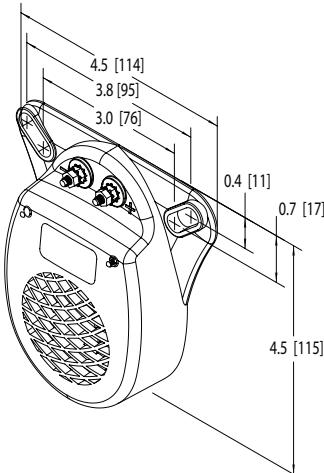

#### Alarm Specifications

Connection: 18-32 uni stud connection  
Fiberglass reinforced nylon housing  
Recommended mounting bolt:  
5/16" Grade 5  
Recommended washer:  
5/16" Type A, Series N or W  
Recommended mounting torque:  
75 in. lbs.