



ER3420CB


UTILITY BARS



EW3420 UTILITY BAR

50" Spot/Flood Combination

ECCO's combination utility bar utilizes exclusive optics to combine a high-intensity Safety Director™ with the powerful illumination output of a worklight. Steady-burn amber mode is ideal for inclement weather and high-dust environments. Brackets included for front- or rear-vehicle mounting. Features include a weather-protected controller connection 12-24 VDC operation, 5-watt LEDs, rugged housing, UV hardcoated polycarbonate lens, and a 5-year warranty.

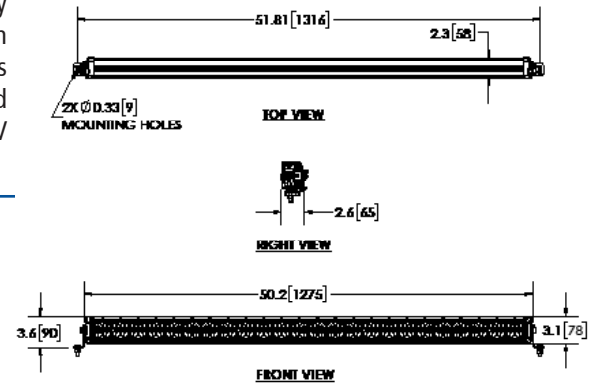

Models

PART NO.	AMPS	RAW LUMENS	BEAM DISTANCE
EW3420 (Upper Row)	5.0 (steady burn amber)	-	1250ft. 116m
(Lower Row)	10.0 (steady burn white)	12,600	381ft. 381m

Features and Benefits

- 12-24 VDC
- Custom optics designed for dual-light operation
- Steady burn amber mode
- Flood light with Safety Director™
- Dual-mounting options
- Rugged heatsink housing and polycarbonate UV hardcoated lens
- IP67 Rated
- SAE Class 1, CA T13


Accessories

- ER3420CB - Replacement combination lightbar controller box
- ER3420MK - Replacement mounting kit for combination utility bar
- EZ3420-CBL - 15' Extension harness and cable for EW3420


Flash Patterns

EW3420


LEFT (L)

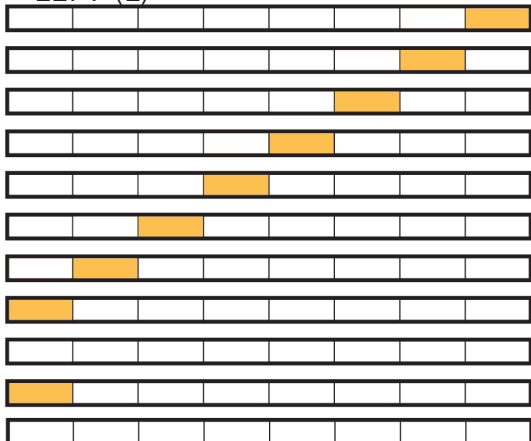


LEFT SOLID (LS)

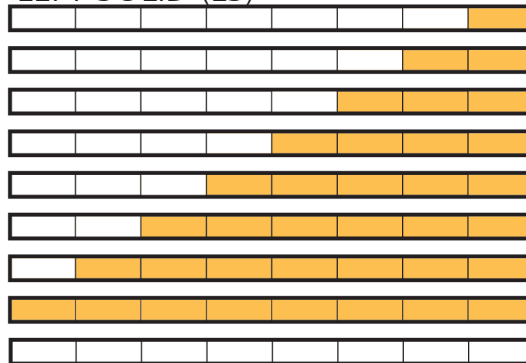


CENTER OUT (C)

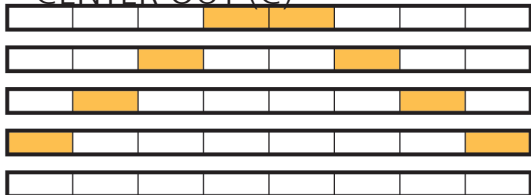


CENTER OUT SOLID (CS)

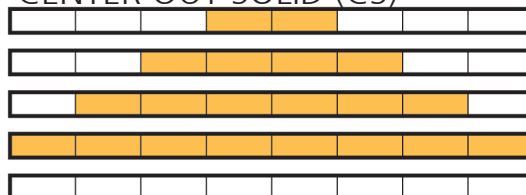

RIGHT SOLID (RS)

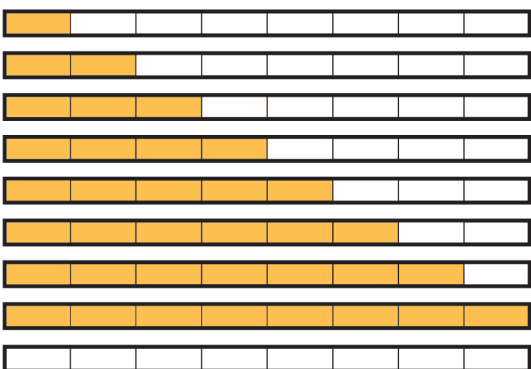


RIGHT(R)

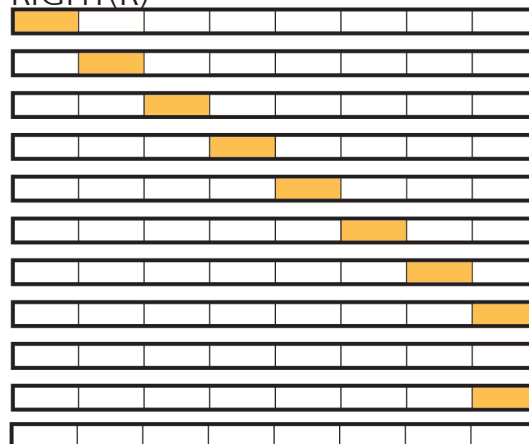

ALTERNATING QUAD FLASH (AQF)



WIG WAG (WW)



ALTERNATING SINGLE FLASH (ASF)



STEADY BURN AMBER

