

Saflok RT Plus Mortise lock

Key Figures

Lifetime per unit: 10 years
Weight per unit: 4.2 kg
Production location: Montreal, Canada

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified				

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓			

Material used (%)

Steel Zinc Paper Stainless steel
Electronics Plastic

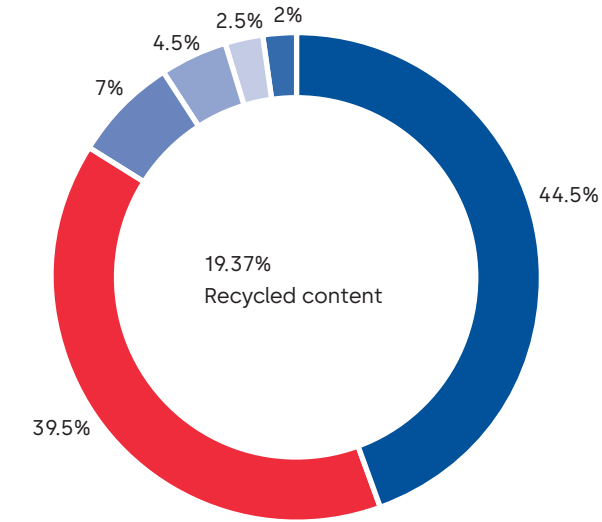

The GWP¹ across the life cycle is 305 kg CO₂e

This is similar to the CO₂ produced from a roundtrip flight from Washington to Pittsburgh (600 km)



¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

dormakaba's RT Plus is an enhanced version of the proven RT Radio-Frequency Identification (RFID) electronic lock, offering the BLE technology directly integrated in the reader. Ideal for retrofit, this durable lock is easy to use and works with Ambiance and System 6000, access management software.

Total Global Warming Potential per life cycle stage (kg CO₂e)

