

Argus 80 Sensor Barrier

Key Figures

Lifetime per unit: 20 years
Weight per unit: 168.2 kg
Electricity use per year: 170 kWh
Production location: Bühl, Germany

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified	ISO 50001 certified	✓

Product declarations / certifications

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	Other
✓	✓	✓	GreenPro Certificate DGNB Navigator Label

Material used (%)

■ Aluminium ■ Glass ■ Steel ■ Plastics
■ Paper ■ Electronics ■ Other

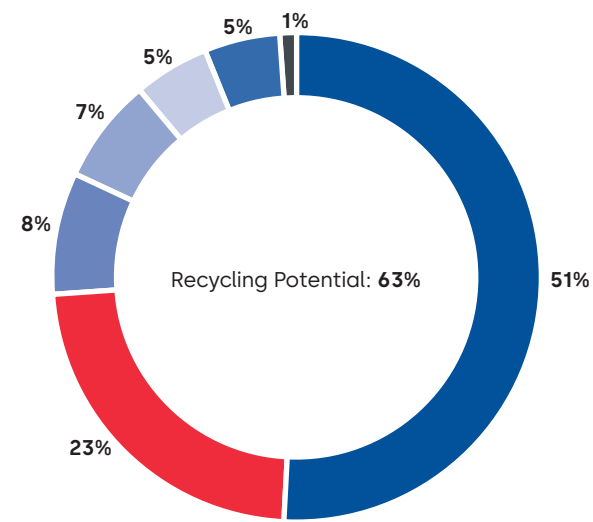

The PCF¹ across the life cycle is 3,837 kg CO₂e

This is similar to the CO₂ produced from a roundtrip flight from Capetown to Frankfurt (≈ 18,800 passenger km).



¹ Carbon dioxide equivalent (CO₂e) is a standard unit of measurement used to express the climate impact of greenhouse gas emissions by converting them into the amount of carbon dioxide that would produce the same global warming effect, based on their global warming potential (GWP). It is widely used in product carbon footprint (PCF) calculations to compare and aggregate emissions of different greenhouse gases on a common basis.



Scan the QR code or click here for more information about our sustainability product declarations.



Scan the QR code or click here for more information about this product.



Product carbon footprint per life cycle stage (kg CO₂e)

