# TS 73 V **Rack and pinion door closer**

**Key Figures** 

Lifetime per unit: 20 years Weight per unit: 2 kg Production location: Singapore

#### **Production standards**


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified	ISO 50001 certified	

#### **Product declarations**

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	~	~	


#### Material used (%)

■ Steel ■ Aluminium ■ Paper ■ Oil ■ Plastic ■ Other

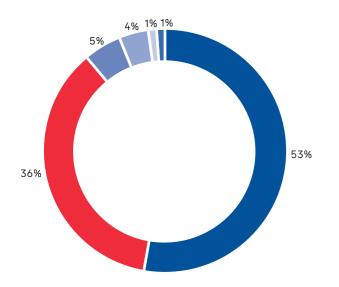

## The GWP<sup>1</sup> across the life cycle is 16 kg $CO_2e$

This is similar to the CO<sub>2</sub> produced from a road trip with a diesel mid-range car from Rümlang to Schaffhausen

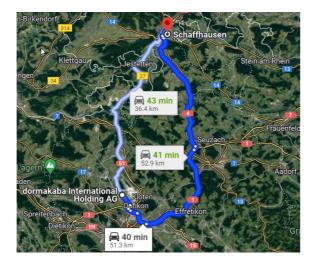

<sup>1</sup> Carbon dioxide equivalent (CO<sub>2</sub>e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability




Scan the QR code or click here for more information about our sustainability product declaration.



#### Description

Specially designed for internal doors, including fire doors, the TS 73 V is a universal solution for doors of differing designs and styles. The flat and compact format of the TS 73 V means that there are practically no problems with installation; and tried and trusted quality is your assurance of reliability. The door closers are used for any standard door and almost all mounting positions.

### Total Global Warming Potential per life cycle stage (kg CO<sub>2</sub>e)

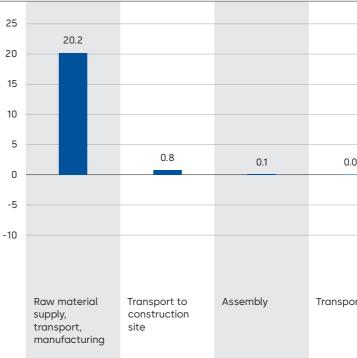

0.009	0.04	0.002	
			-5.1
ort	Waste processing	Disposal	Reuse / recycling potential