

Confidant Lock series

Key Figures

Lifetime per unit: 10 years
Weight per unit: 3.5 kg
Production location: Montreal, Canada

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified				

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓			

Material used (%)


Steel Zinc Paper Stainless steel
Electronics Plastic Brass

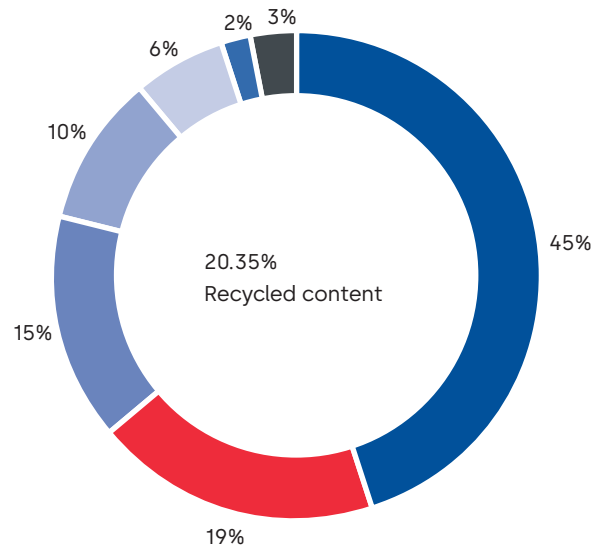

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.

The GWP¹ across the life cycle is 32 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Ennepetal to Dortmund airport

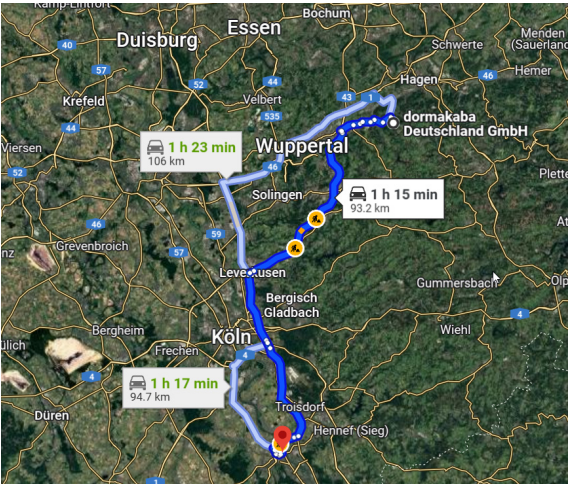

Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

The Lock Series Confidant combines graceful lines, clean aesthetics and contactless Near Field Communication (NFC) technology to provide an enhanced guest experience. This Bluetooth Low Energy (BLE) enabled lock can operate with dormakaba mobile access solutions, allowing guests to use their mobile devices as room keys. The modern looking Confidant lock works conveniently with dormakaba access management software and as a stand alone device.

Total Global Warming Potential per life cycle stage (kg CO₂e)

