

ED 900

Automatic Swing Door Operator

Key Figures

Lifetime per unit: 10 years
Weight per unit: 13.5 kg

Electricity use per year: 70.4 kWh
Production location: Ennepetal, Germany

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified	ISO 50001 certified	✓

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		

Material used (%)

Steel Aluminium Paper Zinc
Plastic Electronics Brass

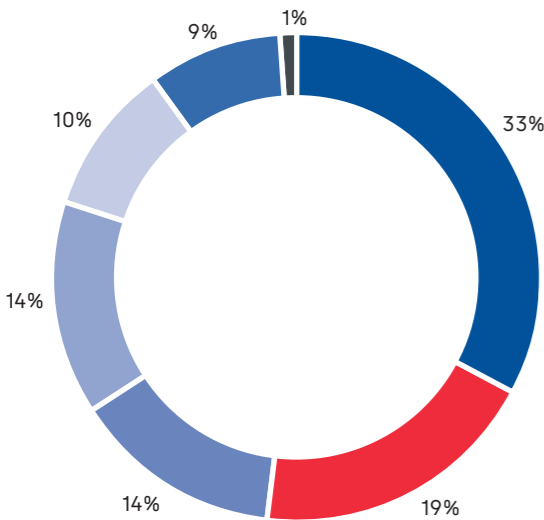

The GWP¹ across the life cycle is 329 kg CO₂e

This is similar to the CO₂ produced from a roundtrip flight from Berlin to Zurich (1,300 km)



¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

The automatic swing door operator is designed for single- or double leaf doors. The operator can be mounted with standard arm as push-version and with slide channel as pull-version. Apart from the extended cover, an integrated door coordinator is also available for double-leaf operators. By using the dormakaba upgrade card, the functional scope can be adapted to a variety of door situations.

Total Global Warming Potential per life cycle stage (kg CO₂e)

