

LA GARD 700

Electronic safe lock

Key Figures

Lifetime per unit: 7 years
Weight per unit: 0.6 kg
Electricity use per year: 0.005 kWh
Production location: Nogales, Mexico

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified				

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓			

Material used (%)


Zinc Plastic Electronics Steel

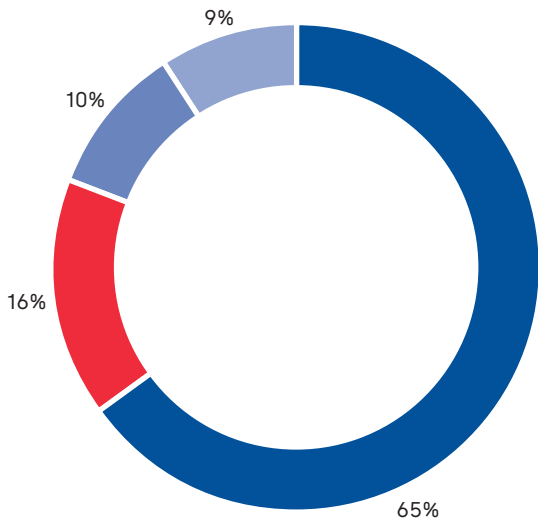

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.

The GWP¹ across the life cycle is 17 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Dubai Al Qusais Industrial Area to Dubai airport

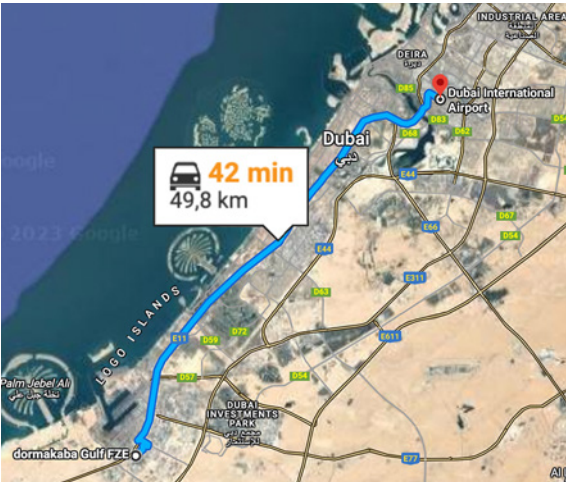

Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

LA GARD has been an industry leader in the safe lock sector for nearly half of a century. The LA GARD 700 Series embodies the original tried-and-true features and long legacy of LA GARD high-security function along with advanced technological features. The series offers a range of features and options to fit almost any safe lock need.

Total Global Warming Potential per life cycle stage (kg CO₂e)

