

# TS 92 Contur Slide channel door closer

## Key Figures

**Lifetime per unit:** 20 years

**Weight per unit:** 3.3 kg

**Production location:** Singapore

## Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified	ISO 50001 certified	✓

## Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓		✓	


## Material used (%)

■ Steel ■ Aluminium ■ Paper ■ Zinc  
■ Lubricant ■ Plastic ■ Other

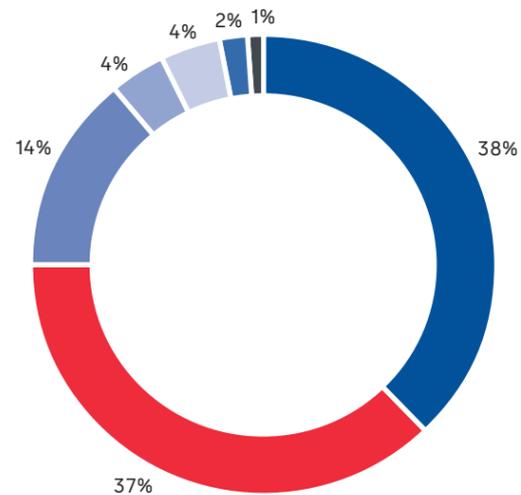

## The GWP<sup>1</sup> across the life cycle is 18 kg CO<sub>2</sub>e

This is similar to the CO<sub>2</sub> produced from a road trip with a diesel mid-range car from Dubai Al Qusais Industrial Area to Dubai airport

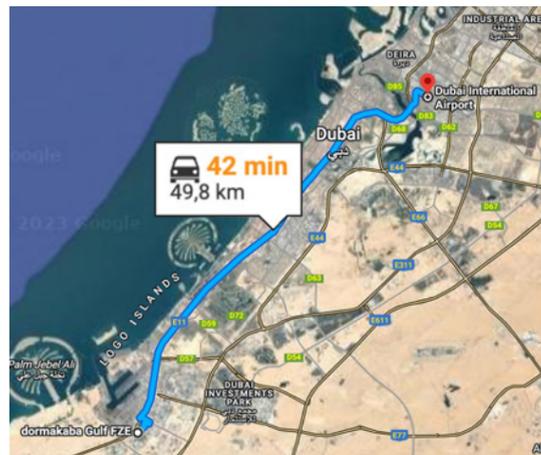

<sup>1</sup> Carbon dioxide equivalent (CO<sub>2</sub>e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



## Description

The universal slide channel door closer for standard doors features EASY OPEN technology for easy door opening. The TS 92 Contur slide channel door closer is an attractive and competitively priced complement to the TS 98 XEA range. For the use and application of the product the respective national provisions at the place of use apply.

## Total Global Warming Potential per life cycle stage (kg CO<sub>2</sub>e)

