

# TS 71and TS 72

## Rack and pinion door closer

### Key Figures

Lifetime per unit: 20 years  
Weight per unit: 1.7 kg  
Production location: Suzhou, China

### Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified				

### Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		


### Material used (%)

Steel Aluminium Paper Plastic  
Oil Zinc

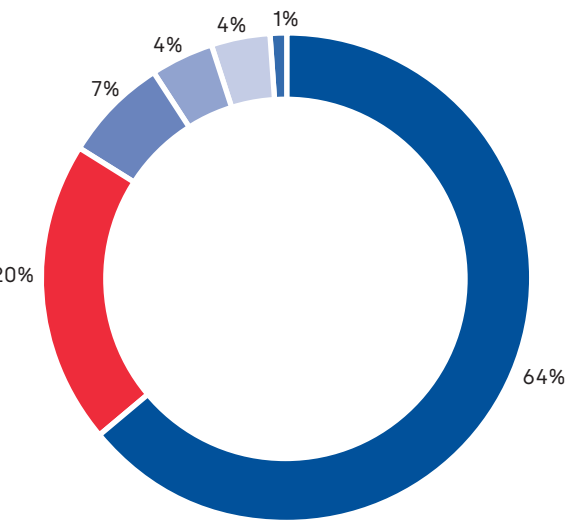

### The GWP<sup>1</sup> across the life cycle is 11 kg CO<sub>2</sub>e

This is similar to the CO<sub>2</sub> produced from a road trip with a diesel mid-range car from Ennepetal to Dortmund airport

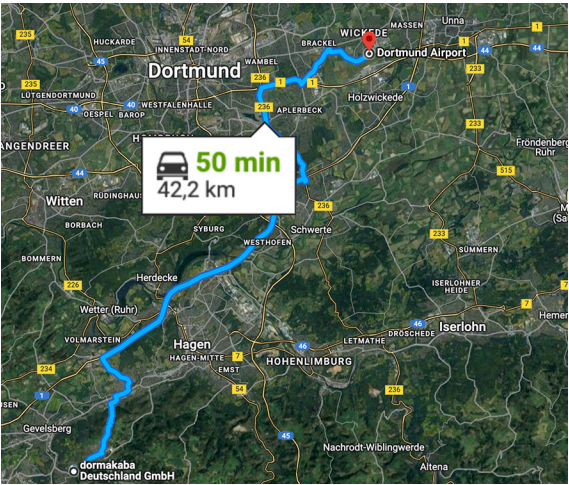

<sup>1</sup> Carbon dioxide equivalent (CO<sub>2</sub>e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



### Description

The TS 71/TS 72 are the ideal multi-purpose door closers for all standard door designs and constructions. Without a backplate, it is particularly easy and quick to fix. The spring strength can be individually adapted to the door size by means of an adjusting valve. The door closers can be used for all standard doors (single- and double-leaf doors).

### Total Global Warming Potential per life cycle stage (kg CO<sub>2</sub>e)

