

Auditcon Safe lock

Key Figures

Lifetime per unit: 7 years
Weight per unit: 0.9 kg
Production location: Nogales, Mexico

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified				

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓			

Material used (%)


■ Plastic ■ Paper ■ Steel ■ Zinc
■ Electronics ■ Brass

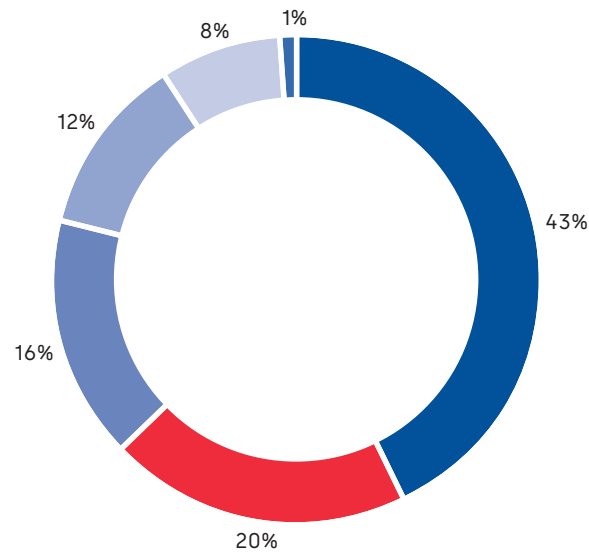

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.

The GWP¹ across the life cycle is 5 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Rümlang to Wetzikon

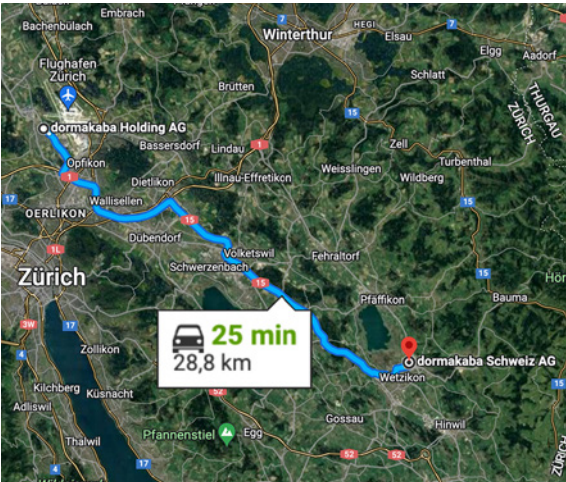

Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

The safe lock series Auditcon protects from unauthorized access. The series is totally self-powered, using the PowerStar Technology. Auditcon offers the advantages and convenience of true stand-alone electronic safe access. It was developed to address the security requirements of a broad range of retail, commercial and industrial markets.

Total Global Warming Potential per life cycle stage (kg CO₂e)

