

TS 91

Cam action door closer

Key Figures

Lifetime per unit: 20 years
Weight per unit: 2.7 kg
Production location: Singapore

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified	ISO 50001 certified	

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		


Material used (%)

Steel Aluminium Paper Zinc
Oil Plastic Other

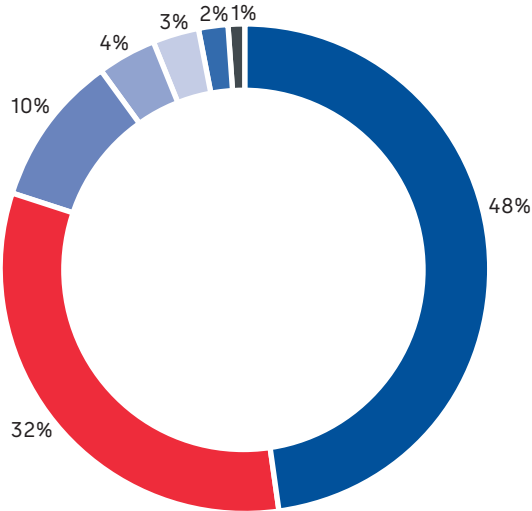

The GWP¹ across the life cycle is 13 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Ennepetal to Dortmund airport

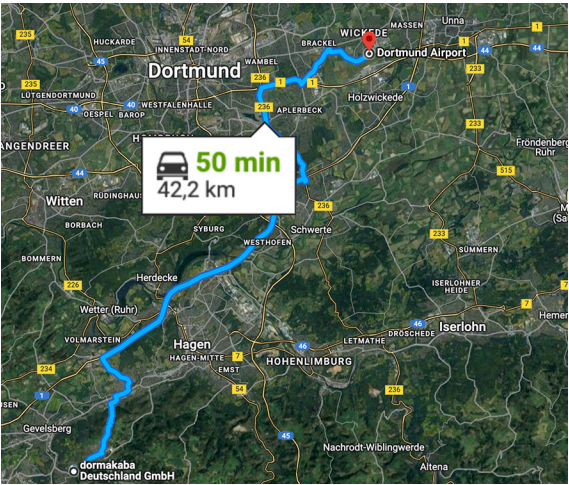

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

Designed especially for interior applications, the TS 91 N22 door closer in Contur design offers excellent ease of use due to its linear drive mechanism with heart shaped cam. For the use and application of the product the respective national provisions at the place of use apply. It can be used for fire and standard interior doors.

Total Global Warming Potential per life cycle stage (kg CO₂e)

