

TS 79

Scissor arm door closer

Key Figures

Lifetime per unit: 20 years
Weight per unit: 1.8 kg
Production location: Suzhou, China


Production standards

Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified		ISO 50001 certified	

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓			


Material used (%)

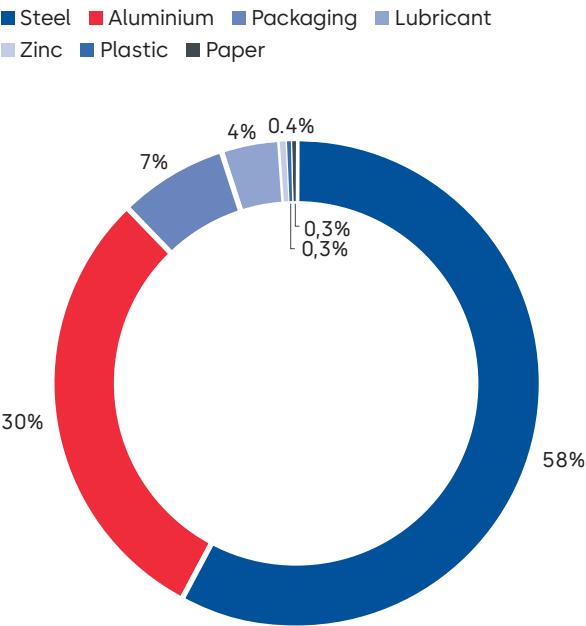

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.

The GWP¹ across the life cycle is 74 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Ennepetal to Hannover

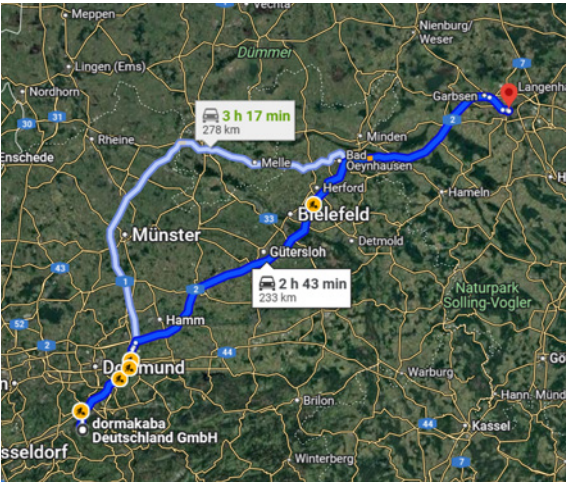

Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

The door closer TS 79 with its minimalistic closer body size is ideally suited for use in office fitouts and apartment entry doors. The ease and speed with which it can be installed, the fact that its spring strength can be so easily adapted to the door size by template position to suit various door sizes makes it the ideal choice for application.

Total Global Warming Potential per life cycle stage (kg CO₂e)

