

KTV M

Manual revolving door

Key Figures

Lifetime per unit: 20 years
Weight per unit: 642 kg
Production location: Sofia, Bulgaria

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified			

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓	✓	✓

Material used (%)

■ Glass ■ Aluminium ■ Steel ■ Stainless steel ■ Brass
■ Zinc ■ Electronics ■ Plastic ■ Wood ■ Paper

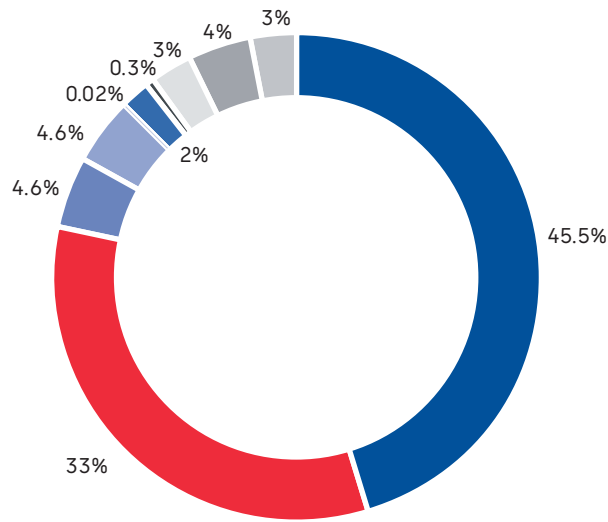

The GWP¹ across the life cycle is 1,337 kg CO₂e

This is similar to the CO₂ produced from a roundtrip flight from Buenos Aires to Quito (8,700 km)



¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

The KTV revolving door range is designed for installation in entrance areas where interior environmental control coupled with elegant aesthetics are desired. dormakaba KTV revolving doors hold back noise, dust and dirt, reliably protect employees near the entrances from drafts, and help to keep the heating costs down.

Total Global Warming Potential per life cycle stage (kg CO₂e)

