

BTS 80, BTS 80 EMB, RTS 80 EMB Floor Spring

Key Figures

Lifetime per unit: 20 years
Weight per unit: 6.2 kg

Production location: Singapore

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified	ISO 45001 certified	ISO 50001 certified	

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓	✓	


Material used (%)

Iron Steel Oil Zinc Brass Other

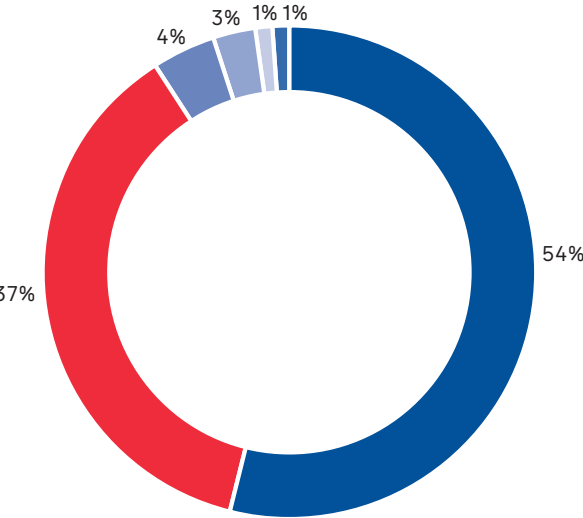

The GWP¹ across the life cycle is 19 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Dubai Al Qusais Industrial Area to Dubai airport

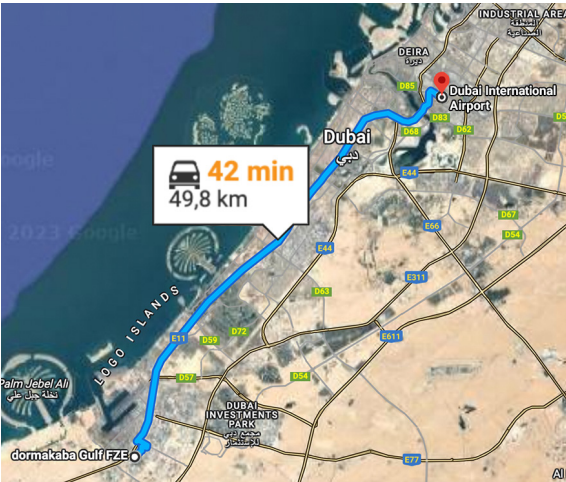

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

dormakaba's BTS 80, BTS 80 EMB and RTS 80 EMB Series of concealed door closers represent the latest in builders hardware technology. The closers can be used in a number of different configurations, including standard, narrow, or wide doors, as well as left-hand and right-hand single- or double-action mounting (both single and double leaf doors, including double leaf doors in combination with a BSR door coordinator).

Total Global Warming Potential per life cycle stage (kg CO₂e)

